


# DID-Surface Mount Installation Instructions

## Overview

### WARNINGS

- This product must be installed in accordance with all applicable codes by a person familiar with the product.
- Each fixture must be **properly supported** during install.
- **DO NOT** join fixtures on the floor prior to lifting, or damage will occur.
- **Before beginning installation**, review our complete list of warnings by visiting [www.saylite.com/warnings](http://www.saylite.com/warnings).

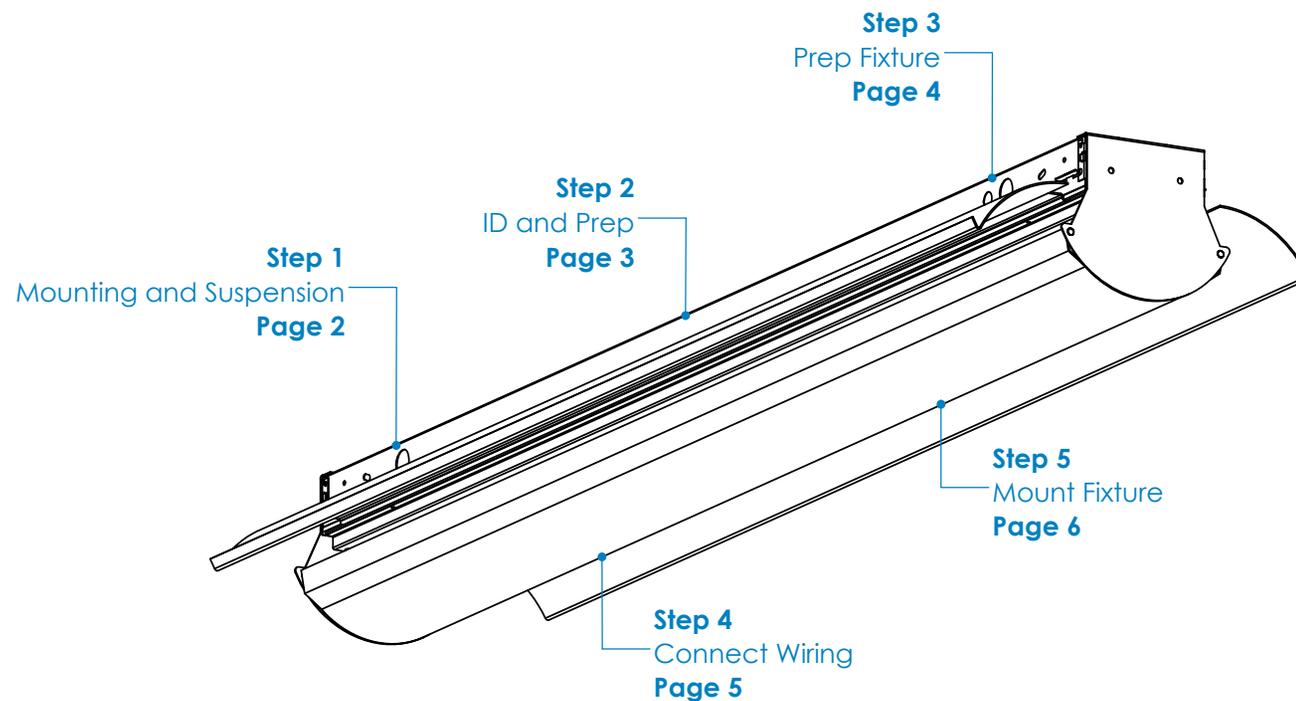

Your particular build may vary.

2020© Saylite | 2055 Luna Road, Suite 142, Carrollton, TX 75006 | [www.saylite.com](http://www.saylite.com)

# DID-Surface Mount Installation Instructions

## Step 1 - Mounting and Suspension

### Mounting

#### Drywall or other hard surfaces - Anchored Screws


- Install anchors at mounting locations.
- Ensure anchors are secure.
- Prepare fixture for mounting.

Other hard surfaces include: wood, sheet metal panels, steel beams, concrete or masonry. Use hardware appropriate for each surface and material type.

#### Suspension Locations

**X** = Suspension Dimensions


Refer to Assembly Drawings and building plans to determine exact mounting, suspension points, and power feed locations.

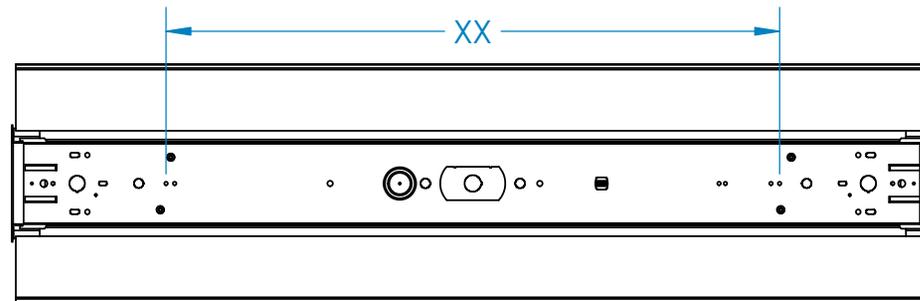

# DID-Surface Mount Installation Instructions


## Step 2 - Identification and Preparation

### A. Identify Fixtures

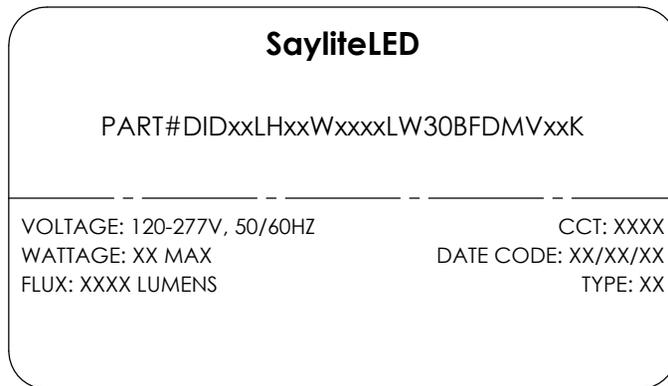

- Use labels found on the box and inside the fixture bodies to identify bodies.
- **NOTE:** Locations of labels can vary.
- Remove all fixtures from their boxes.
- Organize fixtures based on their labels at the install location.


### B. Tools Needed

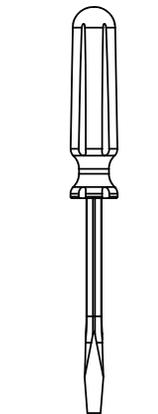


Flathead  
Screwdriver



7/8" Drill Bit



Safety Glasses



Drill

- Always use proper safety equipment when installing fixtures.
- Tools shown are recommended for standard install. Tools needed may vary based on actual install location conditions.

### Kitted Hardware

- Saylite has provided the items listed here, with their Saylite part numbers listed. These items can be found in separate boxes shipped with the fixture.
- Ensure all parts are accounted for and set them aside until needed.
- Any additional hardware needed for this installation will be provided by others.


## DID-Surface Mount Installation Instructions

### Step 3 - Prepare the Fixture




Texas Fluorescents Reinvented

#### A. Remove Components

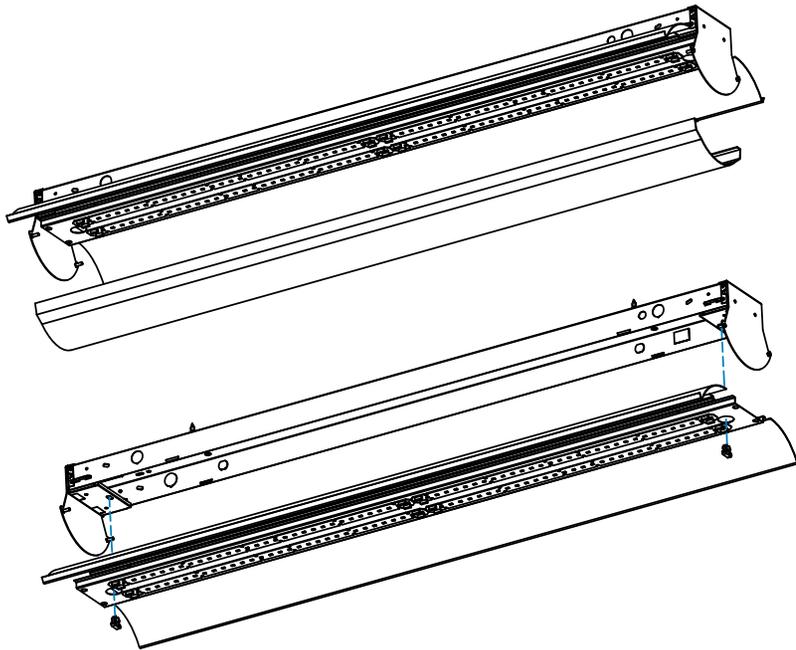

- Remove the lens from the fixture and set aside in a secure location.
- Remove the quarter turns from the fixture and then pull off the gear tray and reflector. Set aside in a secure location.

#### B. Remove Knockout

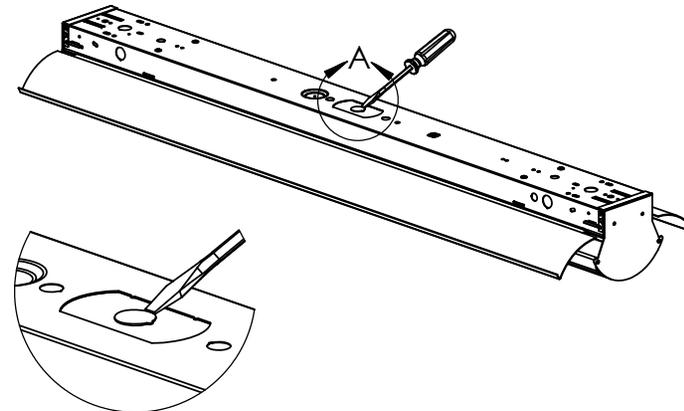


DETAIL A  
SCALE 1 : 4

- Use a flat head screwdriver to gently pry up on the 7/8" knockout and remove it from the fixture.

# DID-Surface Mount Installation Instructions


## Step 4 - Connect Wiring

### A. Drill Hole

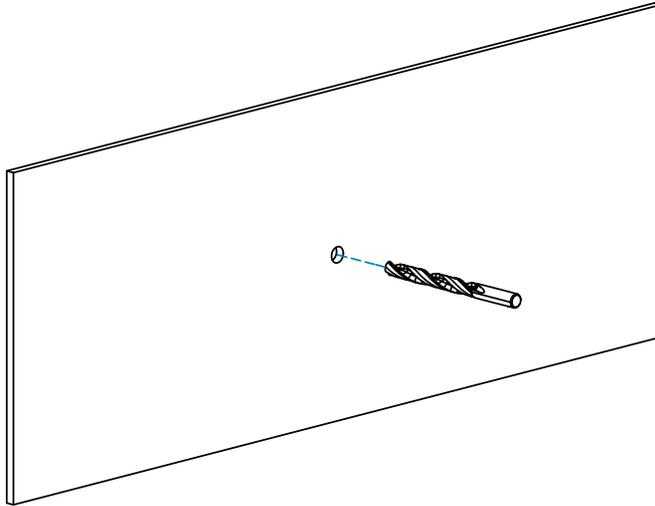

- Drill the hole for the power feed cable at desired location using 7/8" drill bit.
- **NOTE:** Use caution to prevent damage to component behind mounting surface.

### B. Connect Wiring

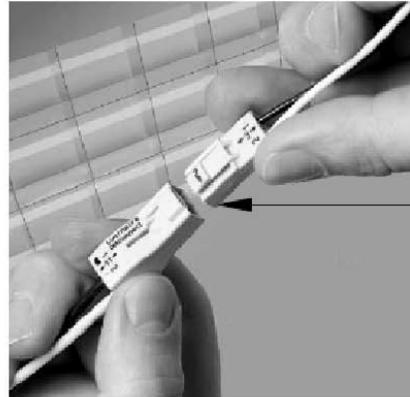

WIRING LEGEND		
BLACK	HOT	Line Voltage
WHITE	NEUTRAL	Line Voltage
GREEN	GROUND	
GRAY	DIMMING	0-10V DC
VIOLET	DIMMING	0-10V DC

- Wire fixture to the incoming power supply using the provided quick disconnect clip as shown.
- For dimming option, refer to wiring legend above.
- Use UL approved connectors only. Follow all local, state and national codes.


# DID-Surface Mount Installation Instructions

## Step 5 - Mount the Fixture




Texas Fluorecents Reinvented

### A. Mount the Body

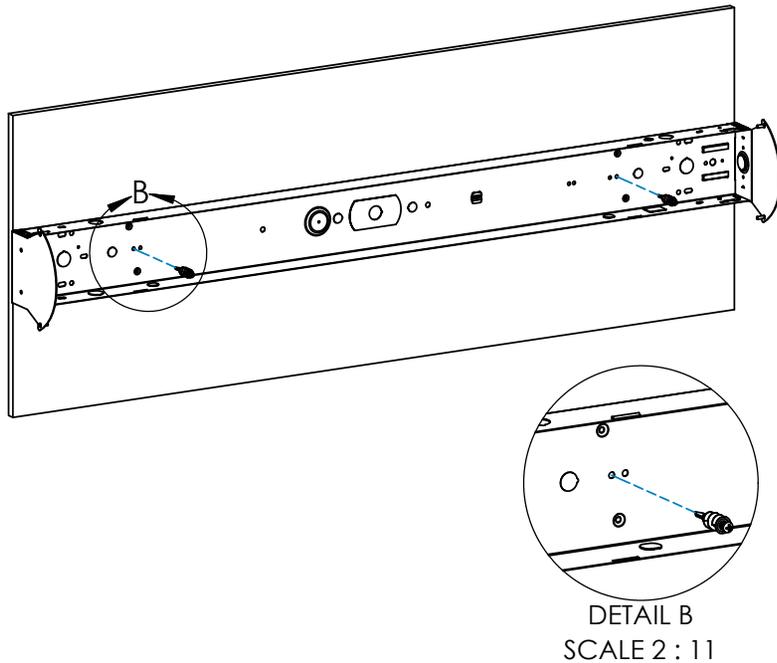

- Mount the fixture body to the mounting surface using anchored screws (not provided).
- Ensure the fixture body is secure before proceeding.

### B. Replace Components

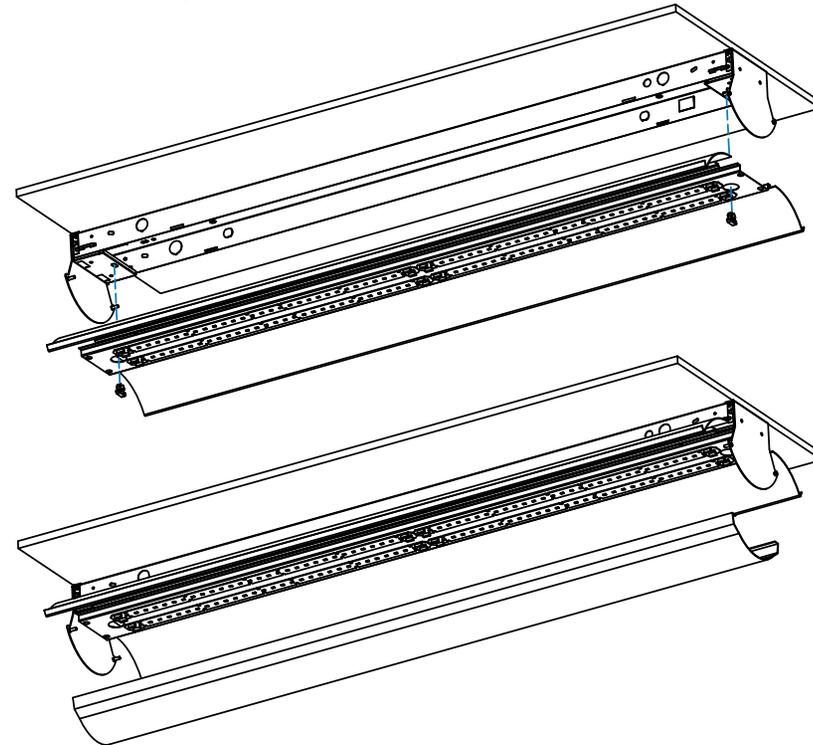

- Reinstall the components removed in Step 3. First install the reflector and gear tray using the quarter turns.
- Next, reinstall the lens to the fixture.
- Fixture installation is now complete.