


# LIN-Pendant-Continuous Run Installation Instructions

## Overview

### WARNINGS

- This product must be installed in accordance with all applicable codes by a person familiar with the product.
- Each fixture must be **properly supported** during install.
- **DO NOT** join fixtures on the floor prior to lifting, or damage will occur.
- **Before beginning installation**, review our complete list of warnings by visiting [www.saylite.com/warnings](http://www.saylite.com/warnings).

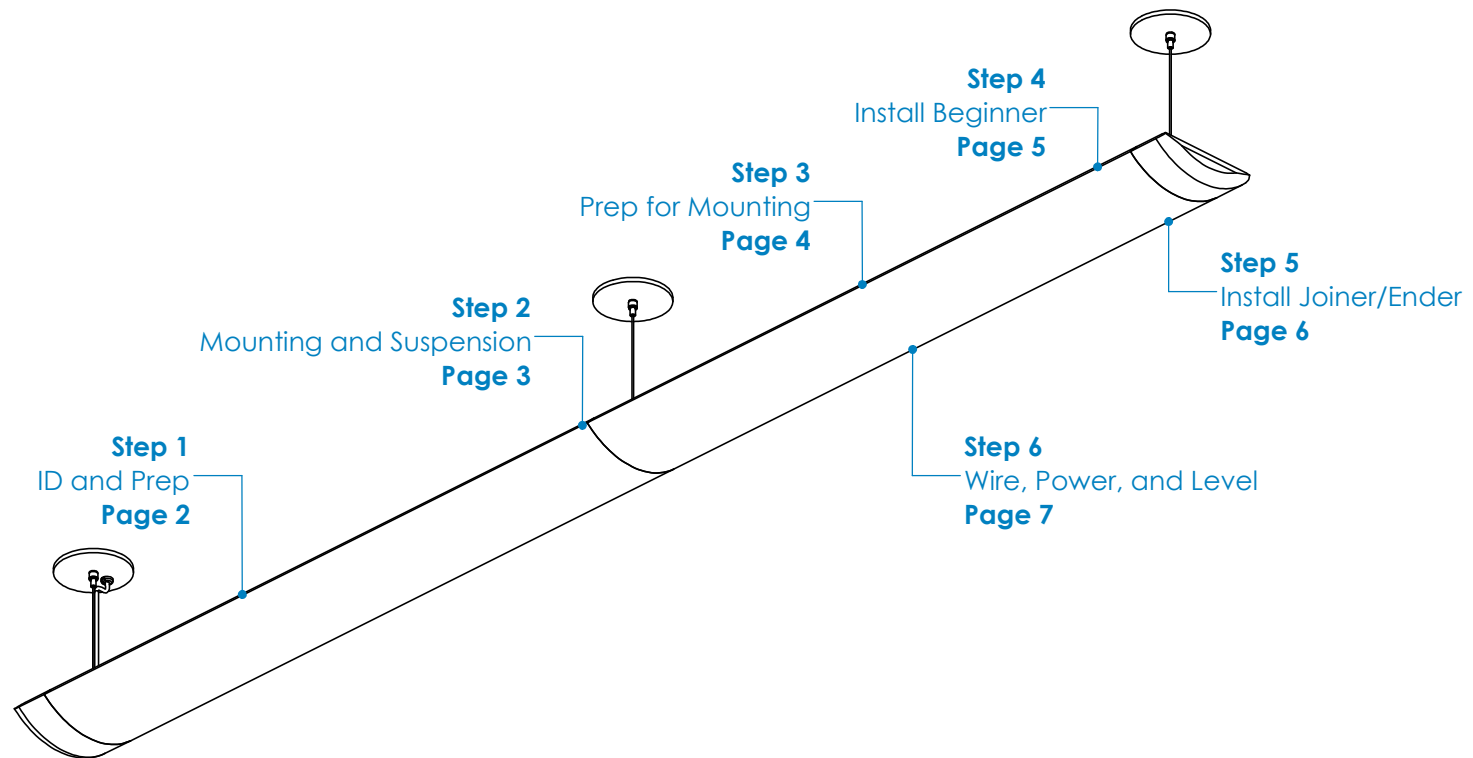


Your particular build may vary.

2020© Saylite | 2055 Luna Road, Suite 142 Carrollton, Texas 75006 | [www.saylite.com](http://www.saylite.com)


# LIN-Pendant-Continuous Run Installation Instructions

## Step 1 - Identification and Preparation

### A. Identify Fixtures

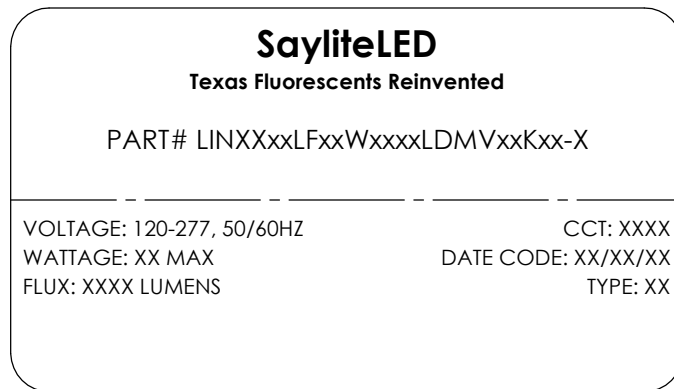


### B. Tools Needed



Screwdrivers



Pliers



Safety Glasses

- Use labels found on the box and inside the fixture bodies to identify bodies.
- **NOTE:** Locations of labels can vary.
- Remove all fixtures from their boxes.
- Organize fixtures based on their labels at the install location.

- Always use proper safety equipment when installing fixtures.
- Tools shown are recommended for standard install. Tools needed may vary based on actual install location conditions.

### Kitted Hardware

- Saylite has provided the items listed here, with their Saylite part numbers listed. These items can be found in separate boxes shipped with the fixture.
- Ensure all parts are accounted for and set them aside until needed.
- Any additional hardware needed for this installation will be provided by others.

# LIN-Pendant-Continuous Run Installation Instructions


## Step 2 - Mounting and Suspension

### Mounting

#### Drywall or other hard surfaces - HC301 Hanging Kit\*

- Install hanging kits at suspension locations.
- Ensure hanging kits are secure.
- Prepare fixture for mounting.

Other hard surfaces include: wood, sheet metal panels, steel beams, concrete or masonry. Use hardware appropriate for each surface and material type.

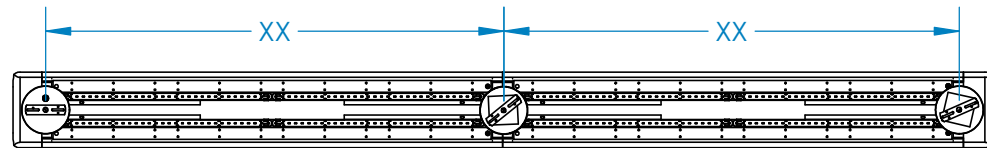

### Suspension Locations


**X** = Suspension Dimensions

Refer to Assembly Drawings and building plans to determine exact mounting, suspension points, and power feed locations.

# LIN-Pendant-Continuous Run Installation Instructions


## Step 3 - Prepare for Mounting Fixtures

### A. Remove Gear Tray(s) from Body

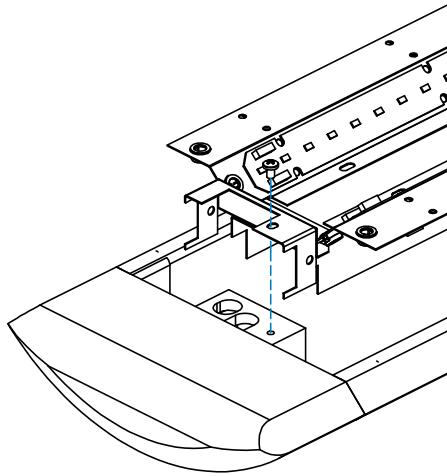

- Remove the gear tray from the fixture by removing the #8-32 screws located on each end of the gear tray.
- Set gear tray aside in a safe location.

### B. Install Hanging Kits

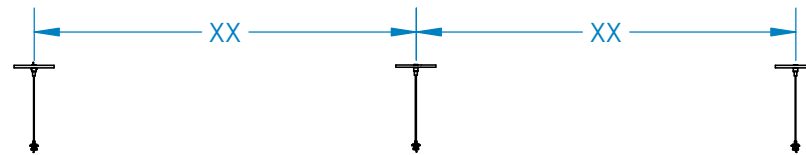


- Install the hanging kits to the ceiling at the desired mounting locations.
- Ensure that hanging kits are properly secured.
- Refer to hanging kit installation guide for more information.

# LIN-Pendant-Continuous Run Installation Instructions


## Step 4 - Install Beginner Fixture

### A. Insert Cable Assembly to the Fixture

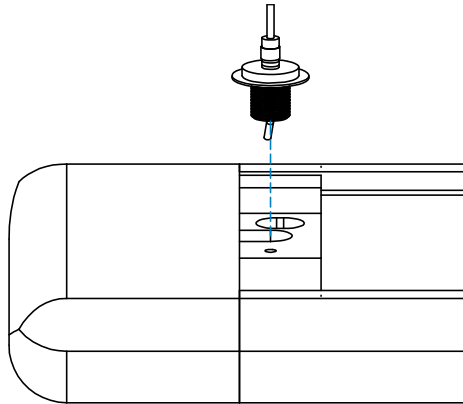

- Insert the cable assembly to the center slot of the mounting bracket with one of the provided washers between the cable clutch and the mount bracket.

### B. Secure Beginner Fixture

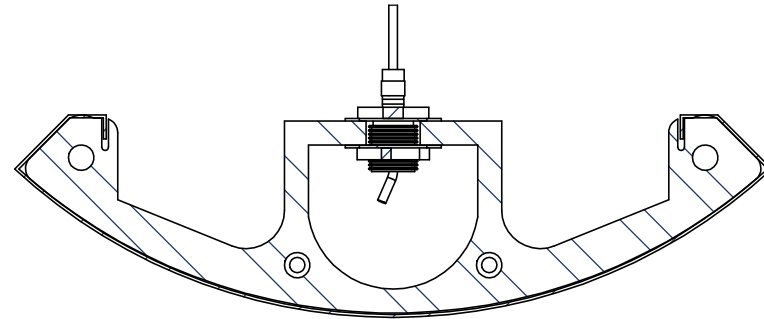

- Secure the cable clutch assembly to the mounting bracket by threading a nut onto the cable clutch.
- Ensure a washer is placed between the nut and the mounting bracket.
- Tighten the nut 1/4 turn with pliers or equivalent to secure the fixture.


# LIN-Pendant-Continuous Run Installation Instructions

## Step 5 - Install Joiner/End Fixture(s)




Texas Fluorescents Reinvented

### A. Hang Fixture End

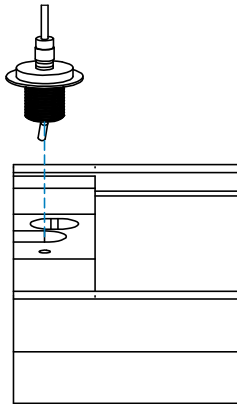

- Insert the cable clutch to the end of the fixture opposite the joining point.
- Secure the free end of the fixture by tightening the provided washer and nut under the mounting bracket as described in Step 4b.

### B. Secure Joiner/End Fixture(s)

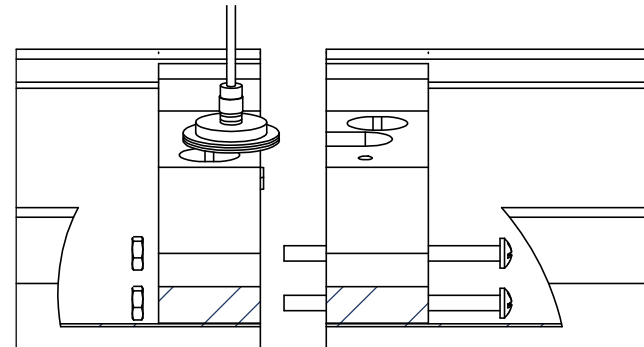

- Secure the next joiner/ender fixture to the current fixture.
- Use 2x #10-32 2 1/4" machine screws (not provided) and nuts to join fixtures.
- Install the screws and bolts to the 2 lower holes of the mounting brackets, tighten until the fixtures are aligned and flush with one another.
- Repeat this step until all fixtures are hanging and secured.


# LIN-Pendant-Continuous Run Installation Instructions

## Step 6 - Replace Components, Wire, and Level




Texas Fluorescents Reinvented

### A. Replace Gear Trays and Connect Wiring

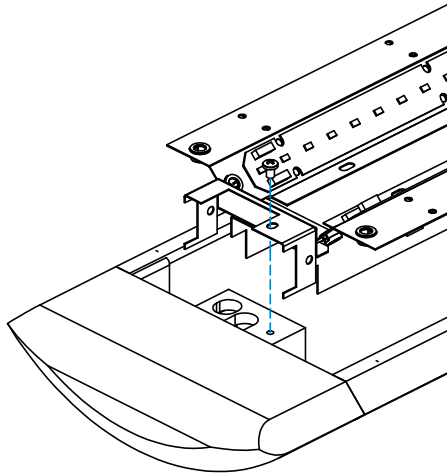

- Replace the gear trays in each fixture, ensure that gear trays are not swapped between fixtures.
- Pull joining wire harness/connectors thru wireway of mounting brackets.
- Connect wiring between fixtures as needed. Multiple power drops may be needed for especially long runs of fixtures.

### B. Wire the Assembly and Level



WIRING LEGEND		
BLACK	HOT	Line Voltage
WHITE	NEUTRAL	Line Voltage
GREEN	GROUND	
GRAY	DIMMING	0-10V DC
VIOLET	DIMMING	0-10V DC

- Wire fixtures to the incoming power supply using the provided quick disconnect clip as shown.
- For dimming option, refer to wiring legend above.
- Use UL approved connectors only. Follow all local, state and national codes. Repeat as needed.
- Adjust hanging cables to level fixture assembly as required.
- Installation is now complete.