



**Texas Fluorescents**  
Reinvented

# 159 Series

## Corridor Light



### FEATURES & SPECIFICATIONS

#### INTENDED USE

Vandal resistant. Available in lengths from 18 to 96 inches. For use in indoor applications, such as hallways, bathrooms, aisles and stairwells.

#### SIZE W x L x H in inches (mm)

- 4.62W x 24.0L x 4.5Dp
- 4.62W x 36.0L x 4.5Dp
- 4.62W x 48.0L x 4.5Dp

#### LAMP

1 lamp positions

#### MOUNTING

White opal acrylic wraparound diffuser. Screw fastened end caps secures diffuser in place. Single or continuous row mounting capability

#### MATERIALS & FEATURES

Housing and ends are die-formed cold rolled steel. Finish is high Wraparound extruded ribbed white opal diffuser designed for durability and visual comfort. Diffuser is held in place on both ends by the screw fastened end caps. End caps may be removed for continuous row mounting with the use of optional joiner assembly. Mounts over electrical junction box. Mounting holes are provided. Knock-outs are provided for stem mounting.

#### TYPICAL OPTIONS & ACCESSORIES


Emergency ballasts, whips, fuses, and cord sets. Contact factory for more details.

#### LISTING

UL labeled for damp location.

### ORDERING INFORMATION

Example: 159A232MV

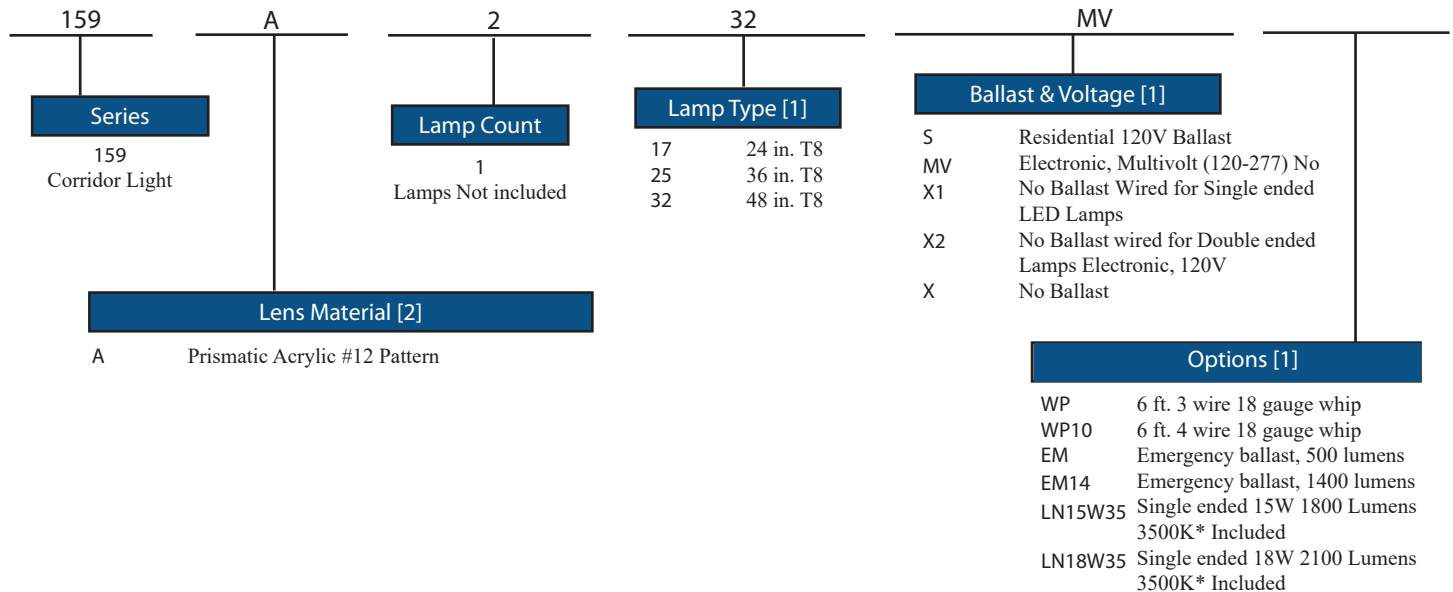

\*Change 35 to 40 or 50 for 4000K or 5000K

#### Notes

[1] See end of

[3] HiLume and LoLume ballasts available for T8 lamps only.

Catalog Number:
Notes:



## DIMENSIONS

