


RLK SERIES

Retrofit Lamp Kit for LED Tubes

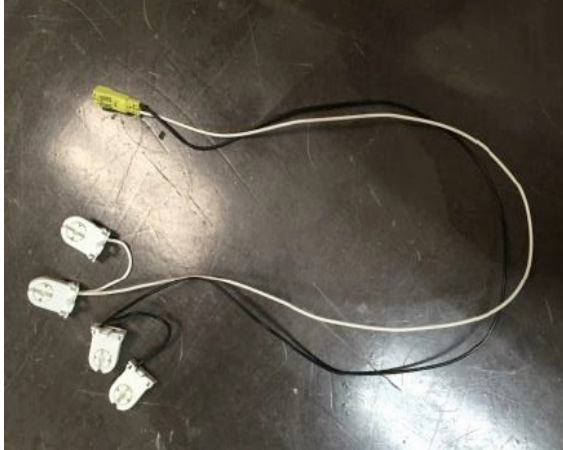

Normally, when retrofitting Fluorescent T8 fixtures to utilize LED T8 bypass lamps requires changing the sockets from Shunted to UnShunted and altering how the sockets are wired. The RLK retrofit lamp kit addresses the common problem by eliminating the hassle of rewiring in the field. The RLK kit provides a pre-wired socket assembly based on the number of LED T8 lamps that will be in the fixture. The kit includes pre-wired unshunted sockets plus the companion sockets for the other side of the fixture. The kit was evaluated as part of a UL Classified Retrofit Lamp Kit. This kit will pay for itself in installation and labor savings.

X1 LED

The most economical, practical and user friendly series of LED fixtures with the energy savings, quality of light, long life and hassle-free maintenance. X1 LED fixtures are UL Listed with the latest LED T8 Bypass lamps. Fixtures provide over 44% energy savings over comparable fluorescent fixtures utilizing less expensive fixtures than the fluorescent version (no ballast required) and have flexibility to change wattage and color temperature any time. Fixture performance will evolve over time with the evolution of the T8 LED lamp technology. Concerned about maintenance with an LED array and driver fixture, X1 LED solves that by utilizing a self contained LED lamp that fits into fixture just like a fluorescent lamp.

Lamp Specifications:

Our T8 LED lamps are available in 2 or 4 ft sizes in different wattage, lumens and color temperature options. Savegreen Lighting is a premier supplier of LED T8 lamps and makes a variety of Bypass T8 lamps to meet the needs of your special application. Options include more energy efficient 12W, 15W and 17W lamps with Premium 10 Year warranty as well as high output options up to 3500 lumens. Double ended LED T8 lamps are also available. See lamp options and specs at www.savegreenlighting.com.

Optional Dimming Options:

The 4 FT lamps are available with two dimming options; Specially designed dimming lamps require an external driver that runs 1 or 2 lamps. So more than 2 lamps require multiple external drivers or Consult for Bypass Type B lamps that can be dimmed without any external driver and dim with standard 2 wire dimming. See dimming options and specs at www.saylite.com.

Emergency Options:

The standard X1 LED Lamps require an inverter or an All-in-one emergency kit that includes LED array, battery and driver. Dimmable T8 LED with external driver works with standard LED EM. For a 5 watt inverter that is similar to adding a 500 Lumen emergency in a conventional fluorescent fixture, add "INV5W" to the end of the item number. This will allow 5 watts of one lamp to work in emergency mode. Or add "EMKT12" to the end of the item number to get a 12W stand alone emergency kit in the fixture that comes with a driver, battery and small LED array that works in Emergency mode. See emergency options and specs at www.saylite.com.



Saylite, Texas Fluorescents Revisited

2055 Luna Rd. Suite 142 Carrollton, TX 75006
Phone: 972-247-3171 Fax: 972-247-0200
www.saylite.com email: sales@saylite.com

| |
|-----------------|
| Catalog Number: |
| Notes: |

Ordering Options

(Fixtures below include LED T8 Lamp LT8ABP48L18W2250LXXK. For Other Lamp Options See below and Replace LNXXX with short code below. Specify without Lamps by removing LNXXX)

| RLK | 2 | X1WR | L118W40 |
|--|--|---|---|
| Series RLK Retrofit LED Lamp Kit | Lamp Count 1, 2, 3 or 4 Lamps not included | Wiring X1WR Wired for Single Ended LED T8 Tubes X2WR Wired for Double Ended LED T8 Tubes | LED Tube Options L115W35 Single ended 15W1875 Lumen 3500K* Included, Not installed L118W35 Single ended 18W2250 Lumen 3500K* Included, Not installed |

*Change 35 to 40 or 50 for 4000K or 5000K

For 5W Emergency, Add INV5 at the End of Item Number for KTEMRGLED5500AC. See other options at www.saylite.com

For fixtures wired for double ended lamps, change X1 to X2 and see the Savegreen Lamps below for the proper Double Ended Lamp. For fixtures without lamps included, remove the "LNXXX" at the end of the item number and have X1 or X2 for Single or Double Ended wiring.

LN18W40 - Lamp Specification

50,000 Hour Life with 5 Year Warranty
Beam Angle 140 Degree
Aluminum Base and Aluminum Housing with Glass Cover
Operating Temperature: - 20C to 50C
Color Temperature: 3500K, 4000K, 5000K
G13 Pins (Same as Fluorescent Linear T8 Bipin)
AC100 – 277V without Ballast
Single Ended or Double Ended Power (If not specified use X1 Single Ended Power)

Savegreen T8 or T5 LED Lamp Options

To include one of these lamps in fixture, remove "LNXXX" and add Savegreen Inside code below.

(See www.savegreenlighting.com for specification sheets or more information on these lamp options.)

| VERSION | SAVEGREEN INSIDE | SAVEGREEN ITEM NO. |
|--------------|------------------|------------------------|
| Popular | SGB15W35 | LT8BG48L15W1740LXXK |
| Standard | SGS29W35 | LT8BGC24L9W1050LXXK |
| Standard | SGS312W35 | LT8BGC36L12W1200LXXK |
| Standard | SGS15W35 | LT8BGC48L15W1740LXXK |
| Premium | SGP12W35 | L10T8BGC48L12W1750LXXK |
| Premium | SGP15W35 | L10T8BGC48L15W2000LXXK |
| Premium | SGP18W35 | L10T8BGC48L18W2500LXXK |
| High Output | SGH26W40 | LT8BGC48L26W3500LXXK |
| Double Ended | SGD18W35 | LT8BDGC48L18W2100LXXK |
| T5HO | SGT525W40* | LT5BG46L25W3300LXXK |
| Magic | SGM18W35K | LT8ABP48L18W2250LXXK |
| Magic | SGM18W35K | LT8ABP48L15W1875LXXK |
| Magic | SGM215W35K | LT8ABP24L15W1875LXXK |

10-YEAR
WARRANTY

Change 35 to 40 or 50 for different Kelvin.

*For T5, CCT 40K and 50K available.



Saylite, Texas Fluorescents Revisited

2055 Luna Rd. Suite 142 Carrollton, TX 75006
Phone: 972-247-3171 Fax: 972-247-0200
www.saylite.com email: sales@saylite.com

Catalog Number:

Notes: