



Texas Fluorescents  
Reinvented

FEATURES & SPECIFICATIONS

INTENDED USE

This luminaire carries up to four lamps. W and dual ballasts the up and down light are individually controlled. The

SIZE H x W in inches (mm)  
4.50H x 5.62W (115 x 145)  
Available in 24, 36, and 48in (610, 915, 1220) lengths

LAMP

2 lamp positions

MOUNTING

Direct wall mount.

MATERIALS & FEATURES

option. Wiring knockouts are provided on back of housing. The clear, ribbed lens is fully captured by the end plate. End cap held in place with acorn nut.

- restricts light to up and down only (no front light). Add dual ballasts for separate control of up and down light.
- Options include emergency ballasts, pull chain switches, and convenience outlets.
- CONTACT FACTORY

# 215 Series

Wall Mount, Up & Down Light,  
Rectangular profile



LISTING


Fixture & Ballast: UL Listed  
Ballast: Thermally protected, class P, HPF, Non PCB

TYPICAL OPTIONS AND ACCESSORIES

pull chains, convenience outlets, and Emergency ballasts. CONTACT FACTORY for custom, compact the end of the T02WallF section, or contact factory for more details.

ORDERING INFORMATION

Example: 215A1U1D32DFMV

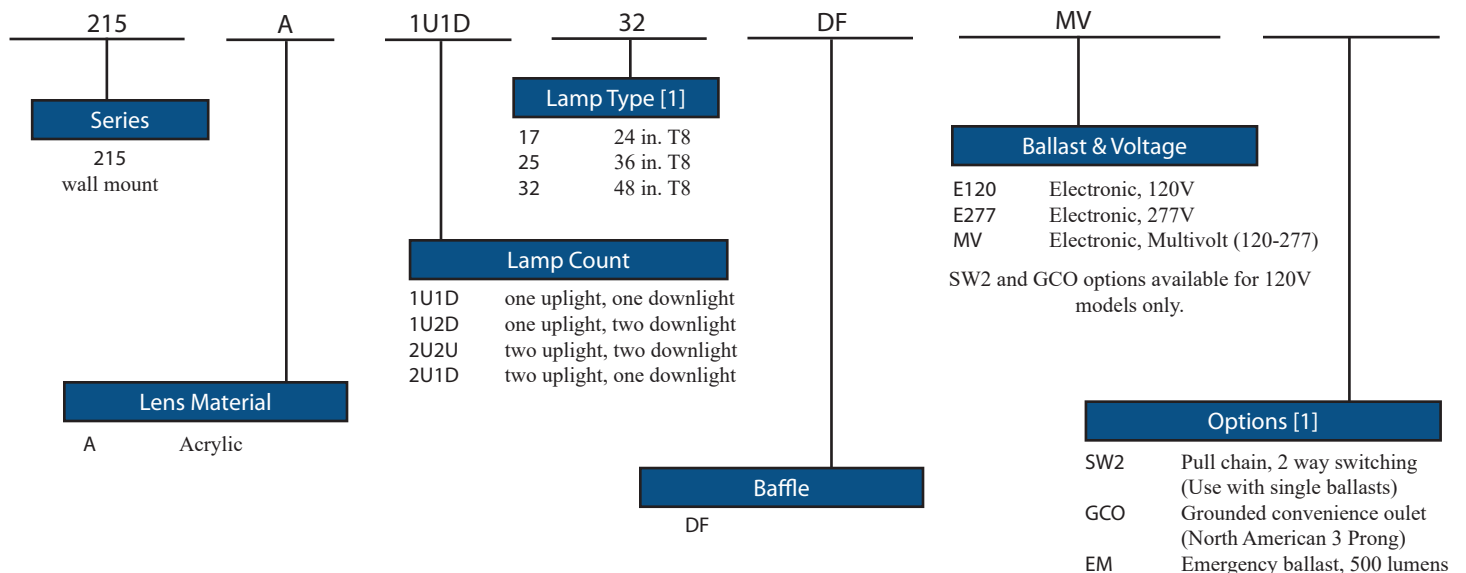

Notes

[1] See end of T02WALL

Catalog Number:
Notes:



Texas Fluorescents  
Reinvented

# 215 Series

Wall Mount, Up & Down Light,  
Rectangular profile

## DIMENSIONS

