


LVS6-Pendant Installation Instructions

Overview

WARNINGS

- This product must be installed in accordance with all applicable codes by a person familiar with the product.
- Each fixture must be **properly supported** during install.
- **DO NOT** join fixtures on the floor prior to lifting, or damage will occur.
- **Before beginning installation**, review our complete list of warnings by visiting www.saylite.com/warnings.

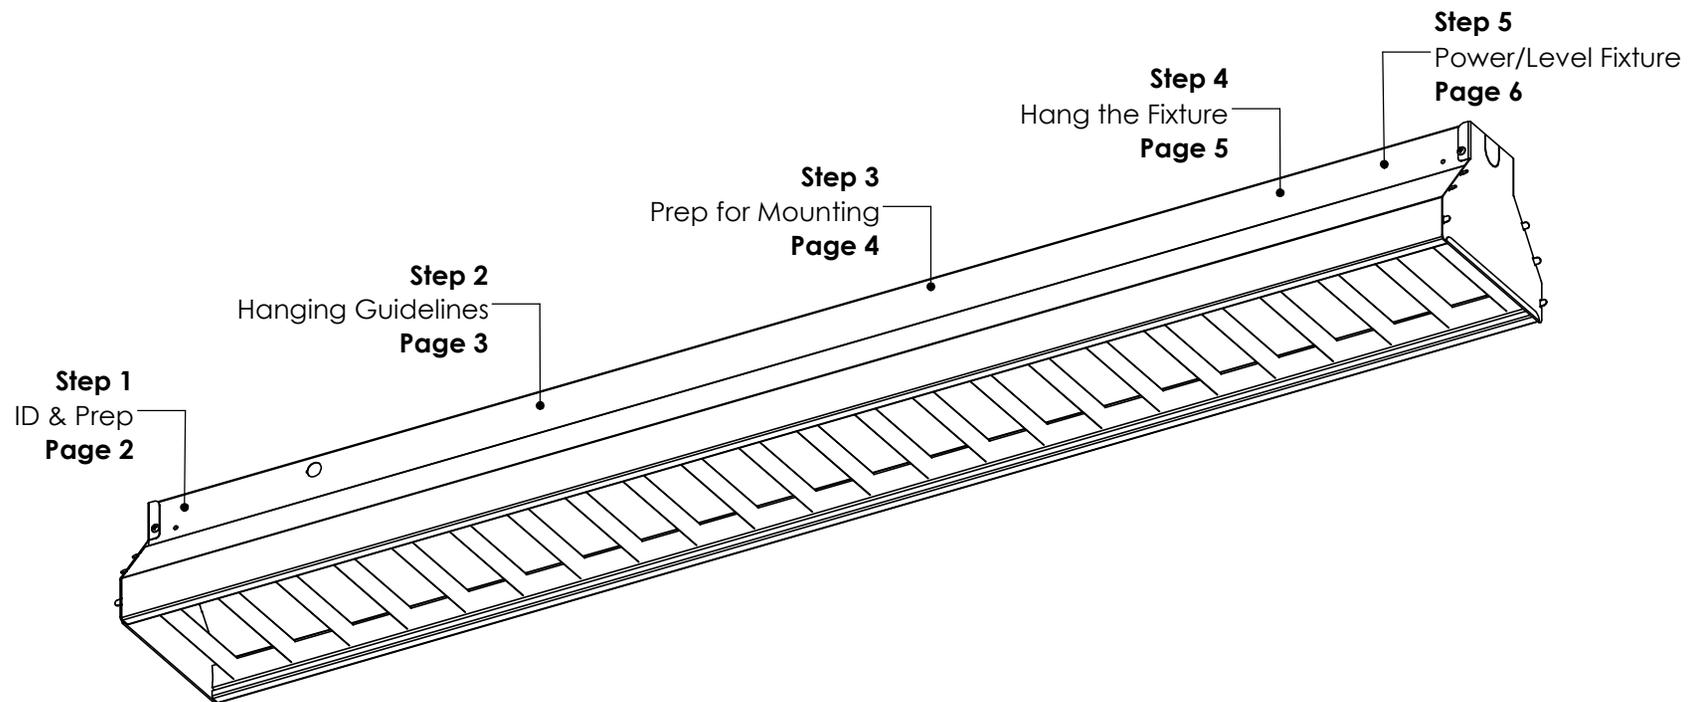

LVS6-Pendant Installation Instructions


Step 1 - Identification & Preparation

A. Identify Fixtures


SayliteLED Texas Fluorescents Reinvented	
PART# LVS6LVxxLYxxWxxxxLDMVxxxxK	
VOLTAGE: 120-277, 50/60HZ	CCT: XXXX
WATTAGE: XX MAX	DATE CODE: XX/XX/XX
FLUX: XXXX LUMENS	TYPE: XX

- Use labels found on the box and inside the fixture bodies to identify bodies.
- **NOTE:** Locations of labels can vary.
- Remove all fixtures from their boxes.
- Organize fixtures based on their labels at the install location.

B. Tools Needed

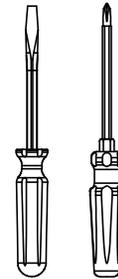

Screwdrivers

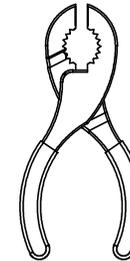

Pliers



Safety Glasses

- Always use proper safety equipment when installing fixtures.
- Tools shown are recommended for standard install. Tools needed may vary based on actual install location conditions.

Kitted Hardware

- Saylite has provided the items listed here, with their Saylite part numbers listed. These items can be found in separate boxes shipped with the fixture.
- Ensure all parts are accounted for and set them aside until needed.
- Any additional hardware needed for this installation will be provided by others.

LVS6-Pendant Installation Instructions

Step 2 - Mounting and Suspension

Mounting

Drywall or other hard surfaces - HC 301/401 Hanging Kit*

- Install hanging kits at suspension locations.
- Ensure hanging kits are secure.
- Prepare fixture for mounting.


Other hard surfaces include: wood, sheet metal panels, steel beams, concrete or masonry. Use hardware appropriate for each surface and material type.

Suspension Locations

X = Suspension Dimensions

Refer to Assembly Drawings and building plans to determine exact mounting, suspension points, and power feed locations.

DIMENSIONS SHOWN FOR 4 FT MODEL

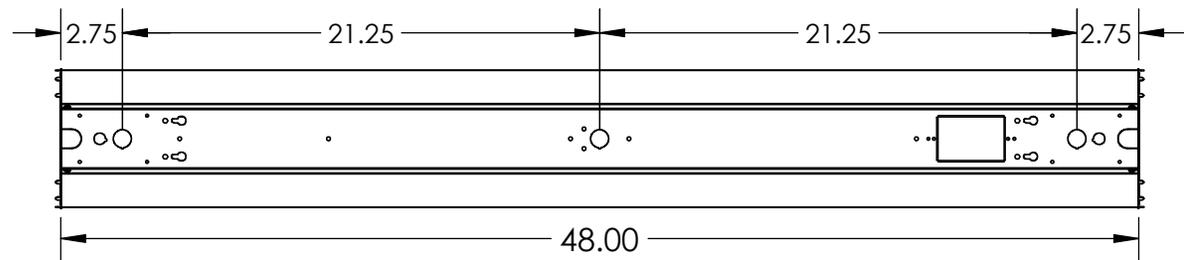

LVS6-Pendant Installation Instructions


Step 3 - Prepare for Fixture Mounting

A. Install Hanging Kits



- Install the hanging kits to the ceiling at the desired mounting locations.
- Ensure that hanging kits are properly secured.
- Adjust hanging cables to desired length, cables can be further adjusted after fixture is installed.
- Refer to hanging kit installation guide for more information.

B. Remove Power Knockout(s)

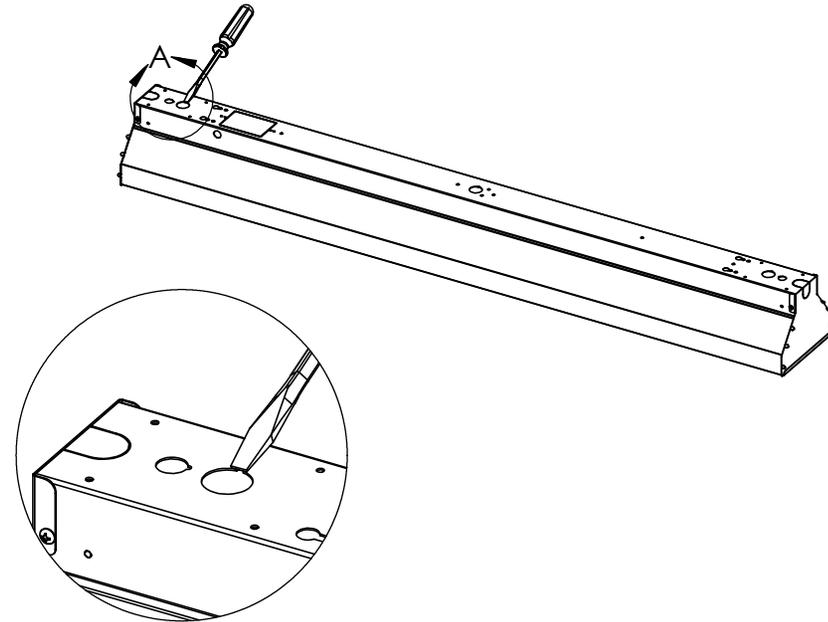

DETAIL A
SCALE 1 : 3

- Use a flat head screwdriver and gently pry up on the 7/8" knockout(s) near the ends of the fixture. Remove the knockouts to ensure that wiring can pass thru.


LVS6-Pendant Installation Instructions

Step 4 - Mount the Fixtures




Texas Fluorescents Reinvented

A. Remove Endcaps From Fixture

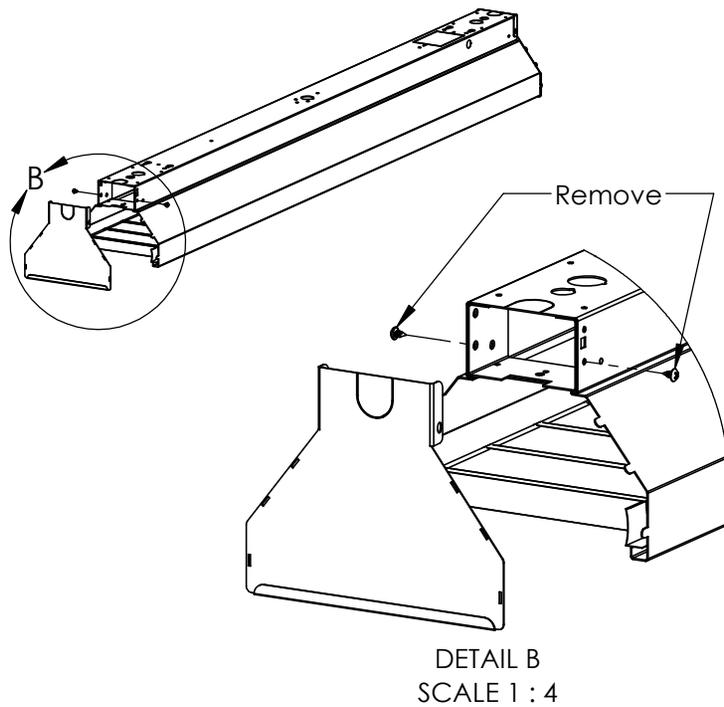

- Uninstall the screws that secure the endcap to the fixture.
- Pull the end cap off the fixture and set aside with the screws in a safe location.

B. Insert and Secure Cable Mounts

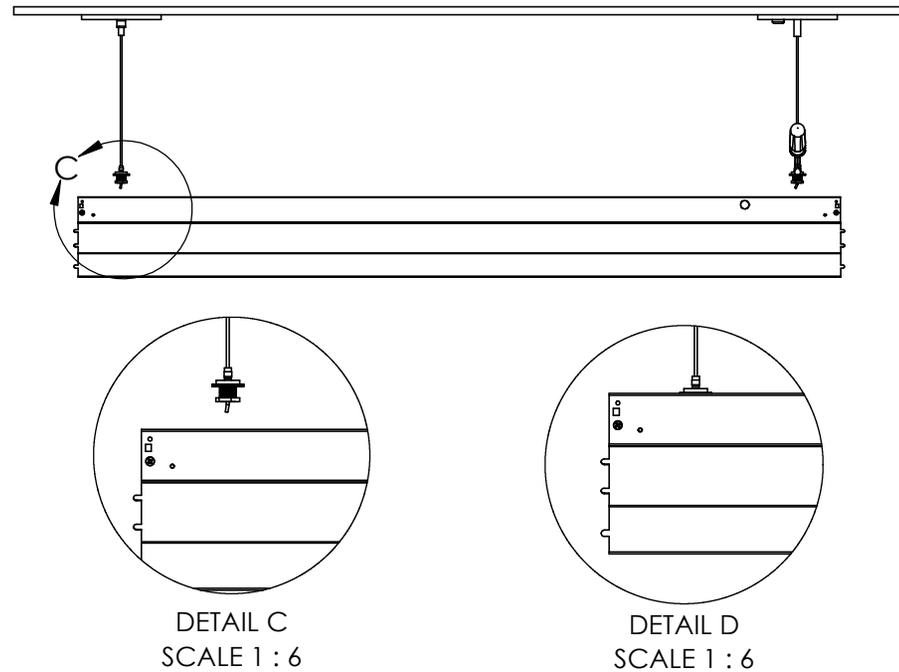

- Insert the cable mount to the knockout(s) removed from the fixture.
- Use provided hanging kit hardware to secure the cable mount to the fixture pan.
- Tighten provided cable mount nut to fully secure the cable mount to the fixture.


LVS6-Pendant Installation Instructions

Step 5 - Wire and Level the Fixture



Texas Fluorescents Reinvented


A. Wire the Fixture

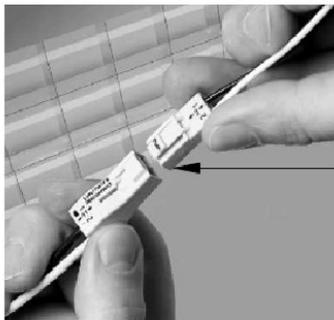

WIRING LEGEND		
BLACK	HOT	Line Voltage
WHITE	NEUTRAL	Line Voltage
GREEN	GROUND	
GRAY	DIMMING	0-10V DC
VIOLET	DIMMING	0-10V DC

- Wire fixtures to the incoming power supply using the provided quick disconnect clip as shown.
- For dimming option, refer to wiring legend above.
- Use UL approved connectors only. Follow all local, state and national codes. Repeat for all remaining fixtures.

B. Level the Assembly

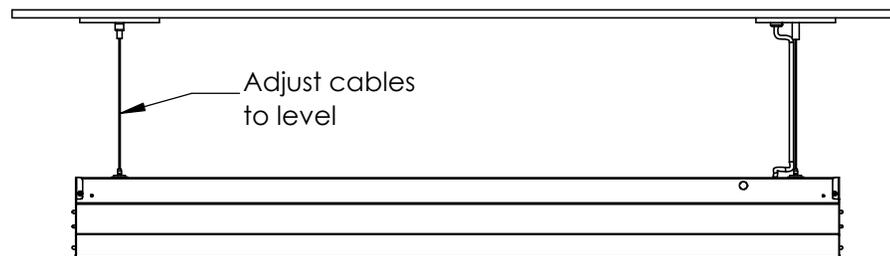

- Secure the power cable to the canopy. Insert the power cable to the wire strain relief and push into the canopy until it clicks into place.
- Adjust the hanging cables as needed to level the fixture.
- Installation is now complete.