


# SER Installation Instructions

## Overview

### WARNINGS

- This product must be installed in accordance with all applicable codes by a person familiar with the product.
- Each fixture must be **properly supported** during install.
- **DO NOT** join fixtures on the floor prior to lifting, or damage will occur.
- **Before beginning installation**, review our complete list of warnings by visiting [www.saylite.com/warnings](http://www.saylite.com/warnings).

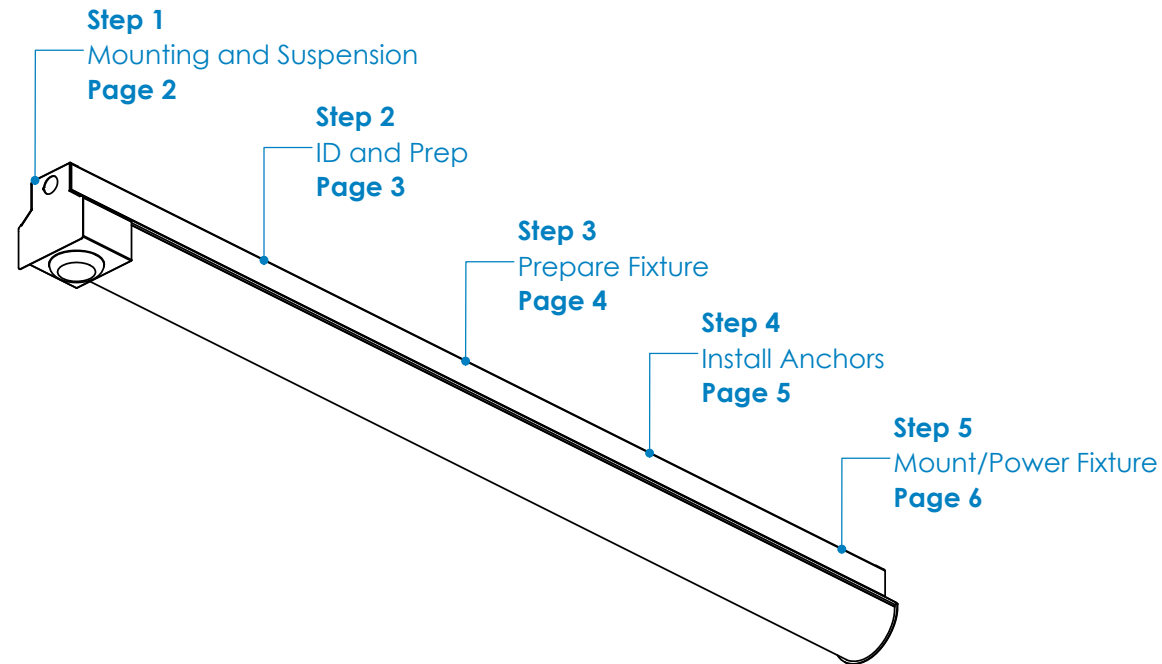

Your particular build may vary.

# SER Installation Instructions

## Step 1 - Mounting and Suspension

### Mounting Options

#### Drywall or other hard surfaces - Anchored Screws


- Install anchors at mounting locations.
- Ensure anchors are secure.
- Prepare fixture for mounting.

Other hard surfaces include: wood, sheet metal panels, steel beams, concrete or masonry. Use hardware appropriate for each surface and material type.

#### Suspension Locations

**X** = Suspension Dimensions

Refer to Assembly Drawings and building plans to determine exact mounting, suspension points, and power feed locations.

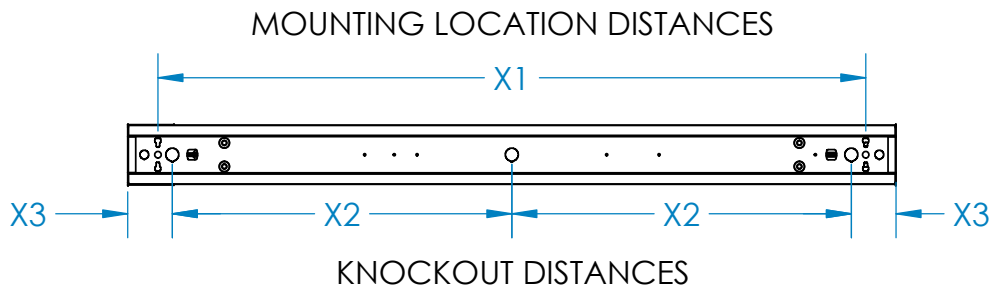

# SER Installation Instructions


## Step 2 - Identification and Preparation

### A. Identify Fixtures


<b>SayliteLED</b> Texas Fluorescents Reinvented	
PART# SER24FRXXLZXXWXXXXXLHBP111	
VOLTAGE: 120-277, 50/60HZ	CCT: XXXX
WATTAGE: XX MAX	DATE CODE: XX/XX/XX
FLUX: XXXX LUMENS	TYPE: XX

- Use labels found on the box and inside the fixture bodies to identify bodies.
- **NOTE:** Locations of labels can vary.
- Remove all fixtures from their boxes.
- Organize fixtures based on their labels at the install location.


### B. Second Sub-step



Screwdrivers



Drill



Safety Glasses

- Always use proper safety equipment when installing fixtures.
- Tools shown are recommended for standard install. Tools needed may vary based on actual install location conditions.


### Kitted Hardware

- Saylite has provided the items listed here, with their Saylite part numbers listed. These items can be found in separate boxes shipped with the fixture.
- Ensure all parts are accounted for and set them aside until needed.
- Any additional hardware needed for this installation will be provided by others.

# SER Installation Instructions





## Step 3 - Prepare Fixture

### A. Remove Lens



- Remove the lens from the fixture and set aside in a safe location for later use.

### B. Remove Gear Tray

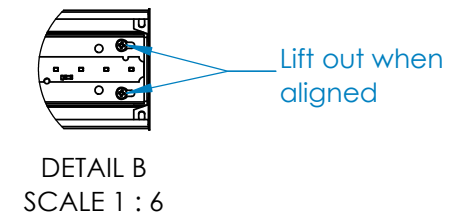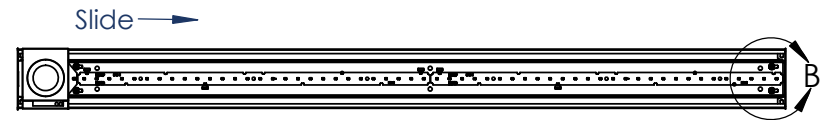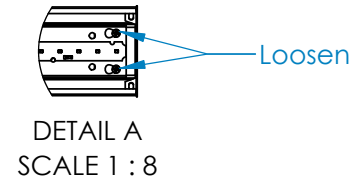


- Loosen the screws securing the gear tray on each end of the fixture.
- Slide the fixture until the screws are centered in the tops of the key holes.
- Lift the gear tray out of the fixture body and set aside in a safe location for later use.


# SER Installation Instructions

## Step 4 - Install Anchors

### A. Transfer Measurements

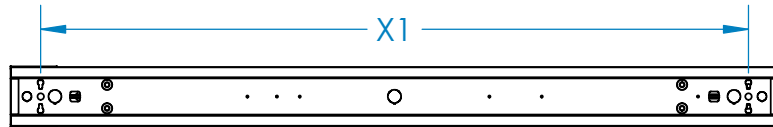

### B. Install Anchors

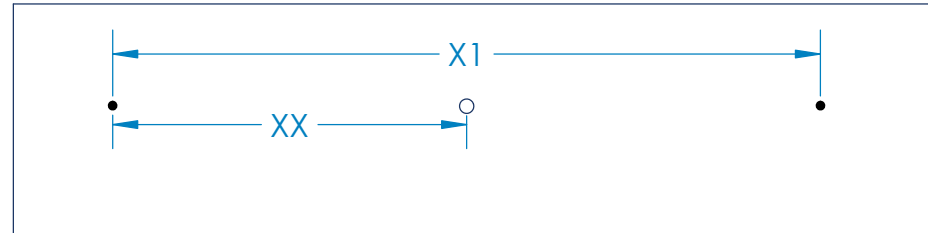



- Refer to assembly drawings for mounting location distances and knockout locations, transfer to mounting surface.

- Install the anchor screws (not provided) to the mounting surface.
- Drill a hole for the power feed supply at desired knockout location.


# SER Installation Instructions

## Step 5 - Mount and Power Fixture

### A. Mount Fixture Body and Replace Components

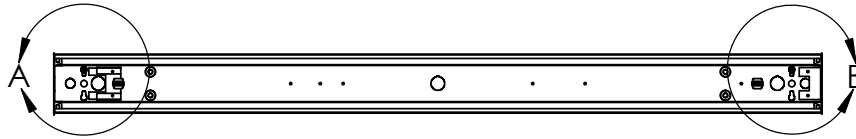

DETAIL A  
SCALE 1 : 6




DETAIL B  
SCALE 1 : 6



- Mount the fixture body to the anchor screws.
- Reinstall the components removed in Step 3.
- Set the gear tray in the body and align with fixture mounts. Slide gear tray back and tighten screws to secure. Replace lens.

### B. Power Fixture



WIRING LEGEND		
BLACK	HOT	Line Voltage
WHITE	NEUTRAL	Line Voltage
GREEN	GROUND	
GRAY	DIMMING	0-10V DC
VIOLET	DIMMING	0-10V DC

- Wire fixture to the incoming power supply using the provided quick disconnect clip as shown.
- For dimming option, refer to wiring legend above.
- Use UL approved connectors only. Follow all local, state and national codes.
- Fixture installation is now complete.