



JOB NAME:


CAT#:

TYPE:

### APPLICATIONS

With 1, 2, or 3 rows of LED in cross section, and a clear acrylic #8 pattern lens, this wraparound is suitable for a wide variety of applications. A full wireway allows more uniform light distribution.


Housing is a 22 gauge baked white enamel cold rolled steel body and ends. No tools required for driver access. Wiring knockouts are provided on back and ends of housing.

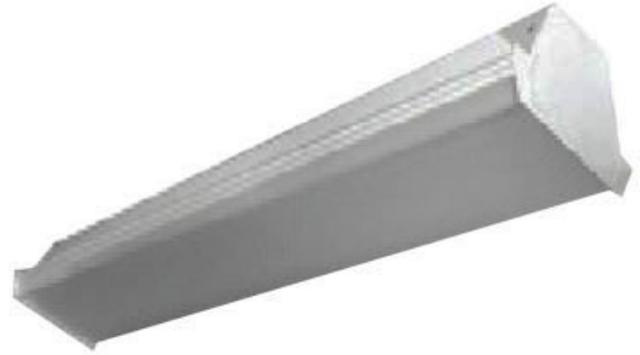

### FEATURES & BENEFITS

- Suitable for a variety of applications such as corridors, stairwells and long run applications
- Min CRI 82

### DIMENSIONS

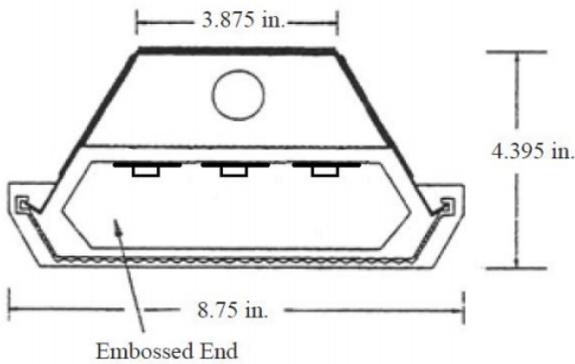

Dimensions and specifications subject to change without notice.





**JOB NAME:**

**CAT#:**

**TYPE:**

**ORDERING**

EXAMPLE: 774 48 LED 32 DMV 30 EM WP

774		LED							
1. SERIES	2. SIZE	3. GEAR	4. WATTAGE/LUMENS		5. DRIVER		6. COLOR TEMP		7. EMERGENCY(O) <sup>1</sup>
774	48 48"	LED	<u>4 ft.</u>		<b>DMV</b> 120-277V Multivolt 0-10V Dimmable	<b>30</b> 3000K	<b>35</b> 3500K	<b>EM</b> 10W ~1200 Lumen Battery backup	
			<b>32</b> 32 Watts 3450 Lumens		<b>SDMV</b> Step dimming Multivolt	<b>40</b> 4000K	<b>50</b> 5000K	<b>EM7</b> 7W ~840 Lumen Battery backup	
			<b>48</b> 48 Watts 5000 Lumens		<b>DHV</b> 347-480VAC 0-10V Dimming			<b>EM5</b> 5W ~600 Lumen Battery backup	
			<b>57</b> 57 Watts 5700 Lumens		<b>D347V</b> 347VAC 0-10V Dimming				
					<b>D120</b> Triac Dimming 120VAC				
					<b>D277</b> Triac Dimming 277VAC				

Consult factory for options

**8. CORD(O)<sup>1</sup>**

**WP** 6' Whip 3 Wire

**Cord & Whip Ordering Chart (Add to End of Fixture Part Number)						
Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip CS - Cordset	(Blank) 3 Wire 4 - 4 Wire 5 - 5 Wire 6 - 6 Wire	(Blank) 6 feet 8 - 8 feet 10 - 10 feet 12 - 12 feet 15 - 15 feet	(Blank) No Plug P* - Standard Plug TL* - Twist Lock	BK - Black WH - White	(Blank) 120-277V 120 - 120V 277 - 277V 347 - 347V 480 - 480V	15 - 15 Amps 20 - 20 Amps

**ACCESSORIES**

Lumens are subject to a tolerance of ±10% and not relevant to RGB  
Input wattage can vary depending on options  
Dimensions and specifications subject to change without notice.

**NOTES:**

<sup>1</sup>O is optional

Dimensions and specifications subject to change without notice.

