


SKB/SKR SERIES

Universal Strip Retrofit Kit w/Reflector

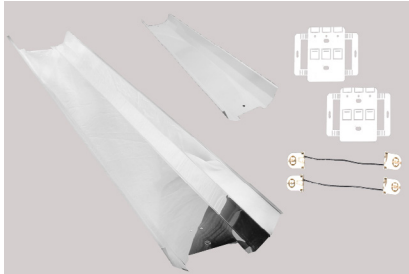

Designed to convert 4' or 8' T8 industrial and strip fixtures to more efficient T8, T5 or LED technology. Choose between retrofitting with a reflector for enhanced performance or simply a ballast cover. Both kits utilize a Universal Socket Bracket engineered to fit most fluorescent channels from 4" to 5.25" in width. The Reflector/Ballast Cover mounts to socket brackets with quarter-turn fasteners for easy maintenance after retrofit is complete. The Universal Socket Bracket ships flat and easily folds to fit channels and requires only simple hand tools. The X1LED SKR series utilize efficient LED T8 lamps that provide high lumen output with efficient energy savings. Since they don't require any ballast or driver the only component that will ever need changing is the LED T8 lamp. The lamps are warranted for five years. Unlike SKR series that utilize LED arrays and drivers these fixtures have the flexibility to change wattage, lumens, and color temperature simply by changing the lamps without the need to call a licensed electrician.

LAMP

1, 2 or 4 lamp positions

MOUNTING

The SKR universal strip retrofit kit mounts easily, requiring only simple hand tools. The process includes removal of the existing ballast cover(s) and removal of the existing socket brackets and ballast. The new reflector is then attached to the existing strip channel with a universal socket bracket and self-tapping screws. The universal socket bracket can fit channels from 4" to 5 1/4" in width. The reflector serves as the ballast cover. Mount and connect new ballast to sockets. Close the reflector using captive quarter turns and install lamps.

REFLECTORS

Precision formed, high performance, premium mirrored specular reflector or enhanced white reflector

X1 LED

The most economical, practical and user friendly series of LED fixtures with the energy savings, quality of light, long life and hassle-free maintenance. X1 LED fixtures are UL Listed with the latest LED T8 Bypass lamps. Fixtures provide over 44% energy savings over comparable fluorescent fixtures utilizing less expensive fixtures than the fluorescent version (no ballast required) and have flexibility to change wattage and color temperature any time. Fixture performance will evolve over time with the evolution of the T8 LED lamp technology. Concerned about maintenance with an LED array and driver fixture, X1 LED solves that by utilizing a self contained LED lamp that fits into fixture just like a fluorescent lamp.

Lamp Specifications:

Our T8 LED lamps are available in 2 or 4 ft sizes in different wattage, lumens and color temperature options. Savegreen Lighting is a premier supplier of LED T8 lamps and makes a variety of Bypass T8 lamps to meet the needs of your special application. Options include more energy efficient 12W, 15W and 17W lamps with Premium 10 Year warranty as well as high output options up to 3500 lumens. Double ended LED T8 lamps are also available. See lamp options and specs at www.savegreenlighting.com.

Optional Dimming Options:

The 4 FT lamps are available with two dimming options; Specially designed dimming lamps require an external driver that runs 1 or 2 lamps. So more than 2 lamps require multiple external drivers or Consult for Bypass Type B lamps that can be dimmed without any external driver and dim with standard 2 wire dimming. See dimming options and specs at www.saylite.com.

Emergency Options:

The standard X1 LED Lamps require an inverter or an All-in-one emergency kit that includes LED array, battery and driver. Dimmable T8 LED with external driver works with standard LED EM. For a 5 watt inverter that is similar to adding a 500 Lumen emergency in a conventional fluorescent fixture, add "INV5W" to the end of the item number. This will allow 5 watts of one lamp to work in emergency mode. Or add "EMKT12" to the end of the item number to get a 12W stand alone emergency kit in the fixture that comes with a driver, battery and small LED array that works in Emergency mode. See emergency options and specs at www.saylite.com.





Texas Fluorescents
Reinvented



Ordering Options

(Fixtures below include LED T8 Lamp LT8ABP48L18W2250LXXK. For Other Lamp Options See below and Replace LNXXX with short code below. Specify without Lamps by removing LNXXX)

ITEM NO.	DESCRIPTION
SKB132B4L11X1L18W40	4.25" Strip Retrofit Kit 48". 2250 Lumen Included 1x18W 4000K Lamps
SKB232B4L11X1L18W40	4.25" Strip Retrofit Kit 48". 4500 Lumen Included 2x18W 4000K Lamps
SKB132B4L11X1L18W40	4.25" Strip Retrofit Kit 96". 4500 Lumen Included 2x18W 4000K Lamps
SKB232B4L11X1L18W40	4.25" Strip Retrofit Kit 96". 9000 Lumen Included 4x18W 4000K Lamps
SKB132B5L11X1L18W40	5" Strip Retrofit Kit 48". 2250 Lumen Included 1x18W 4000K Lamps
SKB232B5L11X1L18W40	5" Strip Retrofit Kit 48". 4500 Lumen Included 2x18W 4000K Lamps
SKB132B5L11X1L18W40	5" Strip Retrofit Kit 96". 9000 Lumen Included 2x18W 4000K Lamps
SKB232B5L11X1L18W40	5" Strip Retrofit Kit 96". 4500 Lumen Included 4x18W 4000K Lamps
SKR132W10L11X1L18W40	Strip Reflector Enhanced White Kit 48" 2250 Lumen Included 1x18W 4000K Lamp
SKR232W10L11X1L18W40	Strip Reflector Enhanced White Kit 48" 4500 Lumen Included 2x18W 4000K Lamp
SKR132W10L11X1L18W40	Strip Reflector Enhanced White Kit 96" 4500 Lumen Included 2x18W 4000K Lamp
SKR232W10L11X1L18W40	Strip Reflector Enhanced White Kit 96" 9000 Lumen Included 4x18W 4000K Lamp
SKR132M20L11X1L18W40	Strip Reflector Mirror Kit 48" 2250 Lumen Included 1x18W 4000K Lamp
SKR232M20L11X1L18W40	Strip Reflector Mirror Kit 48" 4500 Lumen Included 2x18W 4000K Lamp
SKR132M20L11X1L18W40	Strip Reflector Mirror Kit 96" 4500 Lumen Included 2x18W 4000K Lamp
SKR232M20L11X1L18W40	Strip Reflector Mirror Kit 96" 9000 Lumen Included 4x18W 4000K Lamp
SKRUSB	

LN18W40 - Lamp Specification

50,000 Hour Life with 5 Year Warranty
Beam Angle 140 Degree
Aluminum Base and Aluminum Housing with Glass Cover
Operating Temperature: - 20C to 50C
Color Temperature: 3500K, 4000K, 5000K
G13 Pins (Same as Fluorescent Linear T8 Bipin)
AC100 – 277V without Ballast
Single Ended or Double Ended Power (If not specified use X1 Single Ended Power)

For 5W Emergency, Add INV5 at the End of Item Number for KTEMRGLED5500AC. See other options at www.saylite.com

For fixtures wired for double ended lamps, change X1 to X2 and see the Savegreen Lamps below for the proper Double Ended Lamp.

For fixtures without lamps included, remove the "LNXXX" at the end of the item number and have X1 or X2 for Single or Double Ended wiring.

Savegreen T8 or T5 LED Lamp Options

To include one of these lamps in fixture, remove "LNXXX" and add Savegreen Inside code below.

(See www.savegreenlighting.com for specification sheets or more information on these lamp options.)

VERSION	SAVEGREEN INSIDE	SAVEGREEN ITEM NO.
Popular	SGB15W35	LT8BG48L15W1740LXXK
Standard	SGS29W35	LT8BGC24L9W1050LXXK
Standard	SGS312W35	LT8BGC36L12W1200LXXK
Standard	SGS15W35	LT8BGC48L15W1740LXXK
Premium	SGP12W35	L10T8BGC48L12W1750LXXK
Premium	SGP15W35	L10T8BGC48L15W2000LXXK
Premium	SGP18W35	L10T8BGC48L18W2500LXXK
High Output	SGH26W40	LT8BGC48L26W3500LXXK
Double Ended	SGD18W35	LT8BDGC48L18W2100LXXK
T5HO	SGT525W40*	LT5BG46L25W3300LXXK
Magic	SGM18W35K	LT8ABP48L18W2250LXXK
Magic	SGM18W35K	LT8ABP48L15W1875LXXK
Magic	SGM215W35K	LT8ABP24L15W1875LXXK

10-YEAR WARRANTY

SG Inside

Change 35 to 40 or 50 for different Kelvin. *For T5, CCT 40K and 50K available.

Saylite, Texas Fluorescents Reinvented

2055 Luna Rd. Suite 142 Carrollton, TX 75006
Phone: 972-247-3171 Fax: 972-247-0200
www.saylite.com email: sales@saylite.com

Catalog Number:
Notes: