

CBF 1x4

LED Volumetric Recessed Luminaire

FEATURES & SPECIFICATIONS

INTENDED USE

The CBF LED is a specification grade, Volumetric Recessed LED Luminaire which provides smooth and uniform ambient lighting for all commercial and industrial buildings with recessed configurations. Reflected light from matte surfaces provide a softened appearance to the modern office environment.

SPECIFICATIONS

Housing is die-formed and embossed code 22 gauge steel. Luminaire body finish is high reflectance baked white enamel, with matte white reflectors. Wiring knockouts are provided on the back of housing. Center diffuser snaps into place; no tools are required for removal.

FEATURES

- Volumetric recessed luminaire provides a low glare light source
- Matte white reflective surface for soft, uniform light distribution
- 0-10V dimming driver standard
- Easy access plate for quick wiring
- ETL Listed for damp locations



SIZE W x L x H in inches

- 1x4** 12.00"W x 48.00"L x 3.26"D
- 2x2** 24.00"W x 24.00"L x 3.26"D
- 2x4** 24.00"W x 48.00"L x 3.26"D

ORDERING INFORMATION

Example: CBF14LF35W4600LDMV40K


| CBF | 14L | F35W4600L | DMV | 40K |
|------------------------------------|------|--|-------------------|--|
| Series | Size | Wattage / Lumen | Driver | Color Temperature |
| CBF Center Basket Grid Mount | 14L | F22Y 3100N 22 System Watts, 3100 Delivered Lumens F30Y 4000N 30 System Watts, 4000 Delivered Lumens F35Y 4600N 35 System Watts, 4600 Delivered Lumens F40Y 5100N 40 System Watts, 5100 Delivered Lumens F48Y 6000N 48 System Watts, 6000 Delivered Lumens F57Y 7000N 57 System Watts, 7000 Delivered Lumens Value Line V46Y 5700N 46 System Watts, 5700 Delivered Lumens | DMV 0-10V Dimming | 52M' 3000K 57M' 3500K 40K 4000K 50K 5000K |

* Consult FACTORY for more options

| |
|-----------------|
| Catalog Number: |
| Notes: |

CBF 2x2

LED Volumetric Recessed Luminaire

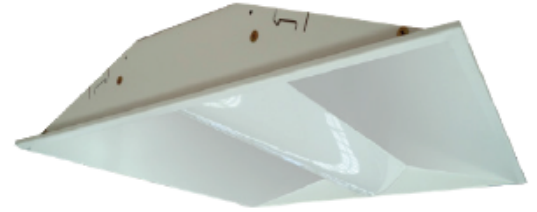

| CBF | 22L | F18W2100L | DMV | 40K |
|------------------------------------|-------------|---|-------------------|--|
| Series | Size | Wattage / Lumen | Driver | Color Temperature |
| CBF Center Basket Grid Mount | 22L | F15Y 1900N 15 System Watts, 1900 Delivered Lumens F18Y 2100N 18 System Watts, 2100 Delivered Lumens F20Y 2500N 20 System Watts, 2500 Delivered Lumens F24Y 3000N 24 System Watts, 3000 Delivered Lumens F28Y 3200N 28 System Watts, 3200 Delivered Lumens F30Y 3600N 30 System Watts, 3600 Delivered Lumens F35Y 4200N 35 System Watts, 4200 Delivered Lumens F40Y 4700N 40 System Watts, 4700 Delivered Lumens F45Y 5100N 45 System Watts, 5100 Delivered Lumens | DMV 0-10V Dimming | 52M' 3000K 57M' 3500K 40K 4000K 50K 5000K |

* Consult FACTORY for more options

| |
|-----------------|
| Catalog Number: |
| Notes: |

CBF 2x4

LED Volumetric Recessed Luminaire



CBF
Series
CBF
Center Basket
Grid Mount

24L
Size
24L

F35W4500L
Wattage / Lumen

| | |
|-------------------|---|
| F22Y 3100N | 22 System Watts, 3100 Delivered Lumens |
| F28Y 3800N | 28 System Watts, 3800 Delivered Lumens |
| F30Y 4100N | 30 System Watts, 4100 Delivered Lumens |
| F32Y 4300N | 32 System Watts, 4300 Delivered Lumens |
| F35Y 4500N | 35 System Watts, 4500 Delivered Lumens |
| F40Y 5200N | 40 System Watts, 5200 Delivered Lumens |
| F48Y 6200N | 48 System Watts, 6200 Delivered Lumens |
| F57Y 7200N | 57 System Watts, 7200 Delivered Lumens |
| F62Y 7900N | 62 System Watts, 7900 Delivered Lumens |

DMV
Driver
DMV 0-10V Dimming

40K
Color Temperature

| | |
|-------------|-------|
| 52M' | 3000K |
| 57M' | 3500K |
| 40K | 4000K |
| 50K | 5000K |

Value Line

| | |
|-------------------|---|
| V46Y 5700N | 46 System Watts, 5700 Delivered Lumens |
|-------------------|---|

***Consult FACTORY for more options**

| |
|-----------------|
| Catalog Number: |
| Notes: |