

CATALOG#: \_\_\_\_\_

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

# CEU3RW

Low Profile All LED  
Exit & Emergency Combo



## STANDARD



## ILLUMINATION

- Adjustable long lasting, efficient ultra bright white LED lamp heads.
- One, 0.5W white LED per lamp head.
- Unique all inclusive lamp, reflector and lens assembly.
- Long-lasting, energy efficient Red or Green LED EXIT sign illumination.

## ELECTRICAL

- Dual 120V/277 voltage standard. Optional dual 120V/230V available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable Ni-Cd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity option available.

## MOUNTING

- EZ-snap thermoplastic mounting canopy included – provides top or end mount.
- Universal K/O pattern on back plate for wall mount.

## HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish.


## OPTIONS

- SPV: UL Listed for special voltage option.
- HL: Provides increased center-to-center spacing (2.0W per head).

## WARRANTY / LISTING

- One year warranty on all electronics and housing.
- UL Listed for damp locations (0°C – 40°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.

## DIMENSIONS

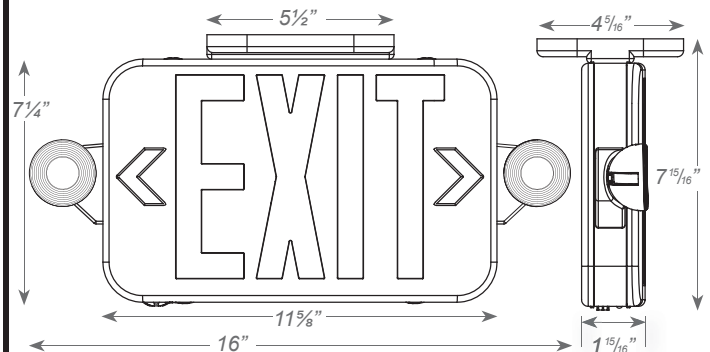

## ORDERING INFORMATION

Sample Part Number: CEU-3-R-W

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
CEU	3 Universal Single/Double Face	R Red G Green	W White B Black	RC Remote Capacity <sup>1</sup> SPV 120/230 Volt 50/60Hz HL High Lumen LED <sup>1</sup>

### NOTES:

<sup>1</sup> -HL and -RC options cannot be combined. 0.5W of remote capacity available standard with -HL option

CATALOG#: \_\_\_\_\_  
PROJECT: \_\_\_\_\_  
TYPE: \_\_\_\_\_

# CEU3RW

Low Profile All LED  
Exit & Emergency Combo

## ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)			INPUT AMPS (A)		
	120V	230V	277V	120V	230V	277V
CEU RED	1.4	1.2	1.7	0.08	0.09	0.09
CEU RED RC/HL	1.6	1.6	1.6	0.12	0.11	0.11
CEU GREEN	1.1	1.2	1.3	0.08	0.09	0.09
CEU GREEN RC/HL	1.6	1.6	1.6	0.12	0.11	0.11

## REMOTE LAMP COMPATIBILITY

MODEL NUMBER	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY												
			RHLED	MRHLED	RH16LED	RH16		RH		RHR		SRH		SRHLED	
			MV			6V	12V	6V	12V	6V	12V	6V	12V		
CEU-RC	3.6V	1W	X	X											
CEU-HL	3.6V	0.5W		X											