

Series CRWN

LED Surface with Crown Molding Frame

The Series CRWN LED Surface Luminaire with Crown Molding Frame provides general illumination in residential, industrial and commercial interior applications. Ideal for kitchens, offices, utility rooms or closets.

CONSTRUCTION

Crown molding frame available in oak or in white finishes (or unfinished). Housing is die-formed and embossed code 22 gauge steel. Bracket and single screw frame. Invisible hanging clips allow removal of lens from either side. Wiring knockouts are provided on back of housing.

MOUNTING

Surface mount.

TYPICAL OPTIONS & ACCESSORIES

Specially formed diffuser produces flawless light source with even illumination on all sides and no distracting dark spots. Invisible hanging clips permit removal of lens from either side.



DIMENSIONS

- 14L - 48"L x 11.5"W x 4.125"H
- 22L - 25"L x 25"W x 4.125"H
- 24L - 48"L x 16.27"W x 4.125"H

FEATURES & BENEFITS

- Provides general illumination in residential, institutional and commercial interiors
- Flush mount design helps prevent light leaks
- Suitable for dry or damp locations
- Several Kelvin temperatures available (3000K, 3500K, 4000K and 5000K); consult factory for RGBW option
- Multiple lumen packages / wattages achievable through use of programmable drivers
- CRI >80 standard, 90 optional
- L70: >50,000 hrs
- Dimming 0-10V 120-277V standard, 120 ELV/TRIAC optional
- Emergency battery backup available
- Power factor >0.90
- 5 year warranty



ORDER INFORMATION

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.


SERIES	LENS MATERIAL	LENGTH	WATTAGE* & LUMENS*	DRIVER	COLOR/CRI**	
CRWN	MW Matte white acrylic	14L 1x4	S48W4800L	48 Watts 4800 Lumens	DMV 0-10V Dimming	30K 3000K 80 CRI
			S57W5700L	57 Watts 5700 Lumens	G120 ELV/TRIAC Dimming at 120V only	35K 3500K 80 CRI
			S24W2400L	24 Watts 2400 Lumens	D1MV 0-10V Dimming (dim to 1%)	40K 4000K 80 CRI
		S28W2700L	28 Watts 2700 Lumens	50K 5000K 80 CRI		
		S35W3200L	35 Watts 3200 Lumens	930K 3000K 90 CRI		
		24L 2x4	S48W4800L	48 Watts 4800 Lumens	935K 3500K 90 CRI	
			S57W5700L	57 Watts 5700 Lumens	940K 4000K 90 CRI	
					950K 5000K 90 CRI	

FINISH	OPTIONS
WH White	EM 10W Emergency battery backup (internal, excludes 22L)
GO Golden Oak	EM12 12W Emergency battery backup (remote only)
UF Unfinished	EM20 20W Emergency battery backup (remote only)
BW Bleached White	


Note:
 *Programmable LED drivers allow custom configured wattages and corresponding lumens.
 ** Consult factory for 90 CRI 5000K availability.
 We reserve the right to change design, materials, LEDs and finish in any way that will not alter installed appearance or reduce function and performance.

DRAWINGS & IMAGES


**Back
2x2**

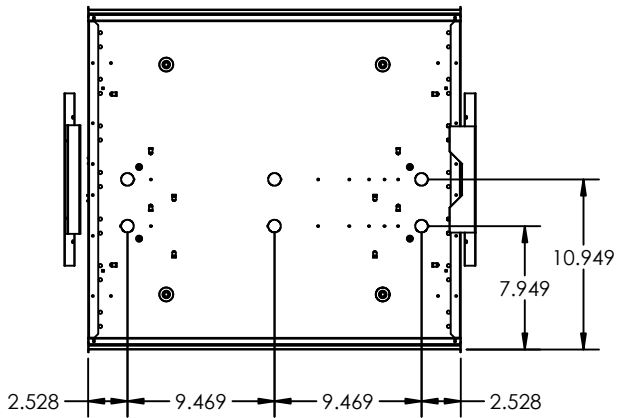


End

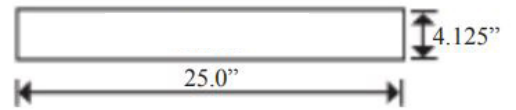


**Back
1x4**

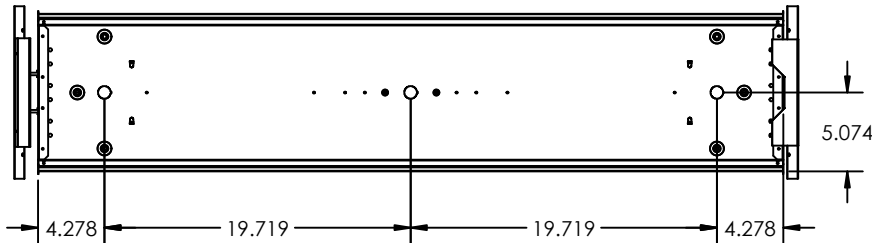

End



**Back
2x4**

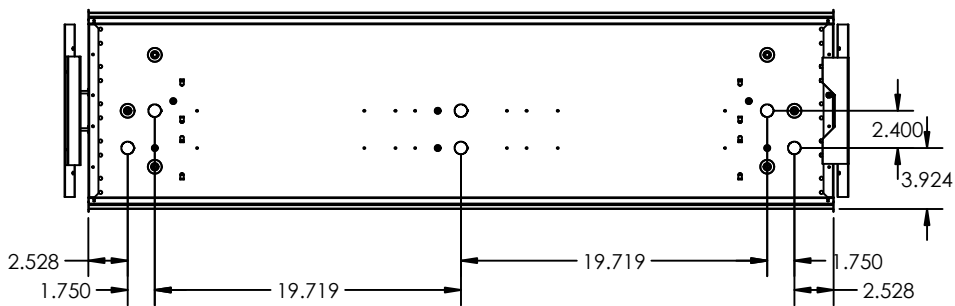

End

