

Series CU45

LED 45 DEGREE LINEAR STRIP



FEATURES & SPECIFICATIONS

INTENDED USE

LED 45 Degree linear strip for interior warehouse, retail, and utility areas requiring general illumination in a commercial quality strip configuration. Ideal for wall and corner applications.

SIZE W x L x H in inches

4.25W x 24"/48"/96"L x 2.00H

MATERIALS & FEATURES

Housing is die-formed and embossed code 22 gage steel. Finish is high reflectance baked white enamel. Wiring knockouts are provided on back and end of housing. Ballast covers or reflectors attach without tools to simplify ballast access.

- End plate doubles as coupler for continuous row mounts.

MOUNTING

Surface mount, chain hung, double stem.

TYPICAL OPTIONS AND ACCESSORIES

Whips, wireguards, Emergency battery backup (IOTA IP710DLZ), or contact factory for more details.

2 ft - STANDARD

Example: CU4548LF30W3900LDMV40K

CU45	24L	F30W3900L	DMV	40K		
Series	Length	Wattage and Lumen	Driver	Kelvin Temperature	Options	
CU45 LED 45 DEGREE LINEAR STRIP	24L 24"	F18W2500L	18 System Watts, 2500 Delivered Lumens	DMV 0-10V Dimming	30K 3000K	Options
		F24W3350L	24 System Watts, 3350 Delivered Lumens		35K 3500K	
		F28W3700L	28 System Watts, 3700 Delivered Lumens		40K 4000K	
		F30W8100L	30 System Watts, 8100 Delivered Lumens		50K 5000K	
					WP 6 ft. 3 wire 18 gauge whip	
					WP10 6 ft. 4 wire 18 gauge whip	
					EM 10w Emergency battery backup	
					PI1 3 Wire Harness	
					PI3 5 Wire Harness	

4 ft - STANDARD

Example: CU4548LF35W4900LDMV40K

CU45	48L	F35W4900L	DMV	40K		
Series	Length	Wattage and Lumen	Driver	Kelvin Temperature	Options	
CU45 LED 45 DEGREE LINEAR STRIP	48L 48"	F24W3500L	24 System Watts, 3500 Delivered Lumens	DMV 0-10V Dimming	30K 3000K	Options
		F30W4300L	30 System Watts, 4300 Delivered Lumens		35K 3500K	
		F35W4900L	35 System Watts, 4900 Delivered Lumens		40K 4000K	
		F48W6500L	48 System Watts, 6500 Delivered Lumens		50K 5000K	
		F57W7800L	57 System Watts, 7800 Delivered Lumens			
		H72W8200L	72 System Watts, 8200 Delivered Lumens			
					WP 6 ft. 3 wire 18 gauge whip	
					WP10 6 ft. 4 wire 18 gauge whip	
					EM 10w Emergency battery backup	
					PI1 3 Wire Harness	
					PI3 5 Wire Harness	

Catalog Number:
Notes:

Series CU45

LED 45 DEGREE LINEAR STRIP



8 ft - STANDARD


Example: CU96LF57W7800LDMV40K

CU45	96L	F57W7800L	DMV	40K	
Series	Length	Wattage and Lumen	Driver	Kelvin Temperature	Options
CU45 LED 45 DEGREE LINEAR STRIP	96L 96"	F24W3500L	DMV 0-10V Dimming	30K	WP 6 ft. 3 wire 18 gauge whip WP10 6 ft. 4 wire 18 gauge whip EM 10w Emergency battery backup PI1 3 Wire Harness PI3 5 Wire Harness
		F48W6500L		35K	
		F57W7800L		40K	
		F70W9800L		50K	
		F97W13000L			
		F118W15500L			

*Consult for more options

DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

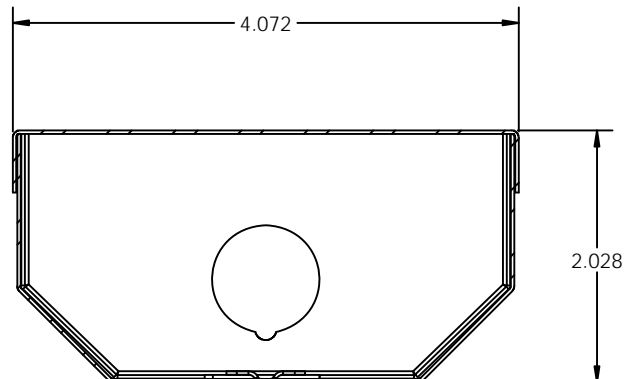

Catalog Number:
Notes: