



Texas Fluorescents
Reinvented

model CXTE

Combo Incandescent
Exit Sign/Emergency Unit



FEATURES & SPECIFICATIONS

- Universal mounting canopy included
- Energy consumption of less than 4W for red letters and less than 5W for green letters
- LED lamp life of 25+ years
- Damp location rated
- Push-to-test switch
- 6V, sealed lead acid, maintenance-free battery
- Automatic, low-voltage disconnect (LVD)
- 120V/277V Dual Voltage operation
- Two fully-adjustable, glare-free incandescent lighting heads
- Injection-molded, V-O flame retardant, high-impact thermoplastic housing
- Available with Self-Diagnostic Testing option, specify suffix "SDT" when ordering.
- Energy consumption of less than 4W for red letters and less than 5W for green letters



Combination LED energy saving exit sign and emergency lighting unit in one compact, modern design.

DIMENSIONS

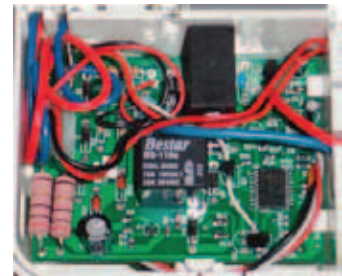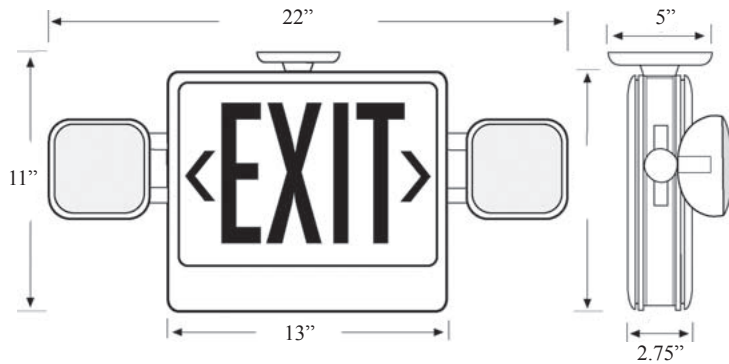

Optional self-diagnostic/self-test feature offers the ultimate in worry-free maintenance and reliability.

ORDERING INFORMATION

Series	Canopy	Number of Faces	Letter Color	Housing Color	Damp Location	Warranty
CXTE	U - Universal mounting canopy included	1 - Single Face 2 - Double Face (Universal)	R - Red G - Green	W - White B - Black	Yes	5 Years

Remote-capable units also available.
Add "RC" to end of part number.

Catalog Number:
Notes: