



Texas Fluorescents
Reinvented

DCC200 Series


LED Wallpack



Product Overview:

32 high power LEDs - no UV rays - instant on/off - aluminum heat sink- Glass optical diffuser - longer life than incandescent, fluorescents & HID's - wide voltage and constant current design - solid state - high shock / vibration resistant - mercury-free - 50%+ savings in energy consumption - no noise, no flickering. This product is IP66 rated. 5 Year limited warranty.

Description	Replaces 250-400 Watt lights used for general flood applications
Watts (W)	75
Power Factor Correction (PFC)	>.9
Light Output (Lumens)	6386*
Efficacy (Lumes/Watt)	86**
Color Accuracy (CRI)	>70
Color Temperature (K)	4700-5200 Day White
Working Voltage	120 - 277 VAC
LED Count	64 High Power LEDs
Lens reflector style	Clear Glass
Operating Temperature (°F)	-30C to +70C (-22F to +158F)
Mount/Base Type	Wall mount
Dimensions (inches)	18L x 9H x 12D
Weight (pounds)	12 lbs
Typically Replaces	250-400w Wall Pack
Life Expectancy (L70 Hours)	Up to 50,000 Hours
Photometric Data Available?	Yes
IES File Available?	Yes

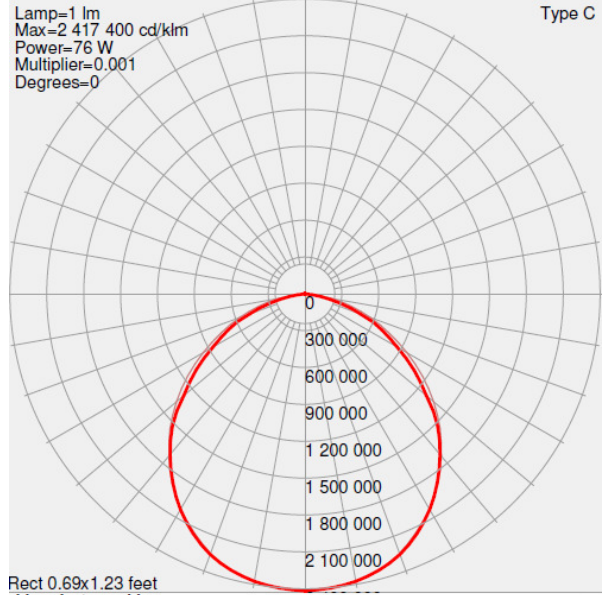

Rect 0.69x1.23 feet
 Manufacturer: Moco
 Luminaire catalog: Large Cutoff Wallpack
 Luminaire: Wallpack With Flat clear glass lens
 Lamp catalog: 64 XBDs. LUMINAIRE OUTPUT = 6386 LMS
 Lamp: Two LED arrays with 32 LEDs each

NOTES:

Sold individually
 Specifications subject to change without notice
 Agency: ETL, Tempo, Lighting Facts, DLC
 *Measured and verified at the fixture level
 **Lumen efficacy at the fixture level, not the LED lumen output

ORDERING INFORMATION

DCC200L Series DCC200L	75W6400L Wattage and Lumen 75W6400L 75 System Watts, 6400 Delivered Lumens	MV Driver MV Multi - Volt 120V-277V	50K Kelvin Temperature 50K 5000K
--	---	--	--

Saylite
 2055 Luna Rd. Suite 142 Carrollton, TX 75006
 Phone: 972-247-3171 Fax: 972-247-0200
 www.saylite.com email: sales@saylite.com

Catalog Number:
Notes: