



Texas Fluorescents  
Reinvented

CATALOG#: \_\_\_\_\_  
PROJECT: \_\_\_\_\_  
TYPE: \_\_\_\_\_

# Series DID

## LED Direct/Indirect Linear Strip

Medium body decorative strip with reflectors and basket options for offices, conference rooms, retail and utility areas requiring concentrated illumination in a commercial quality configuration with more style. By choosing the reflector types and basket materials, the lighting designer can control the light intensity.

### CONSTRUCTION

Housing is die-formed and embossed code 22 gauge steel. Body finish is high reflectance baked white enamel. Wiring knockouts are provided on back and end of housing. Reflectors attach with quarter turn fasteners; no tools required for ballast access. End plate doubles as coupler for continuous row mounts. Reflectors available in several materials. Perforated metal reflectors and baskets are made of cold rolled steel treated with rust inhibitor. Perforated metal parts are post painted with a durable baked polyester coat. Each piece is formed by our state of the art multi-radii machine for consistency.

### MOUNTING

Surface mount, chain hung, stem mount

### TYPICAL OPTIONS & ACCESSORIES

Whips, fuses and wire guards. Contact factory for more details.



### DIMENSIONS


Fixture width and height vary with reflector selection.  
Fixture length=48 / 96 inch length

### FEATURES & BENEFITS

- P10 - perforated reflector
- W30 - economical white steel reflectors, for abusive locations
- Suitable for dry and damp locations
- 50,000 hrs of L70 LED life
- CRI>80
- 0-10 Volt dimmable 120-277V
- Power factor 0.99
- 5 year warranty




### DRAWINGS & IMAGES

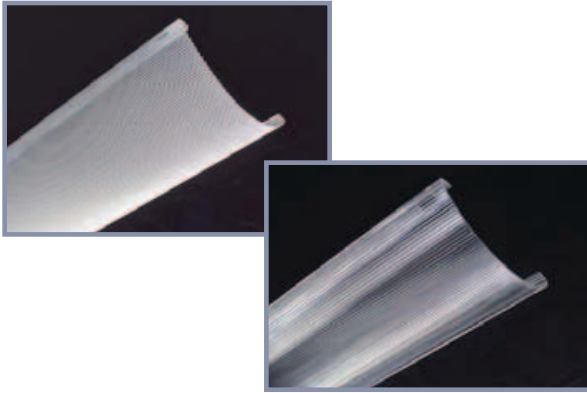


#### Basket Options



Smooth  
White Lens




Fine Fluted  
Lens




Perforated

#### Back

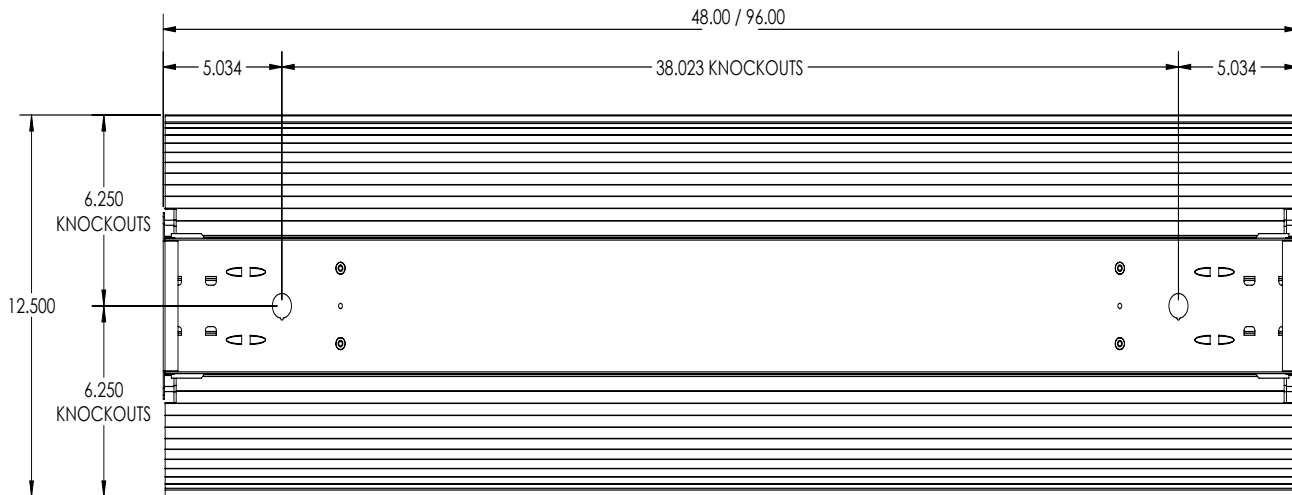

#### End

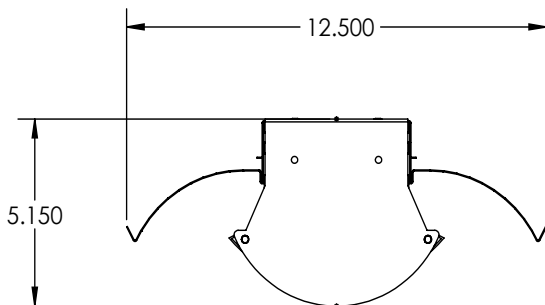

**ORDER INFORMATION**

**Standard**

SERIES	SIZE	WATTAGE & LUMEN	REFLECTORS	BASKET TYPE	DRIVER	COLOR
DID	48L 48"	<b>S32W3450L</b> 32 Watts 3450 Lumens	<b>W30</b> White Steel	<b>BP</b> Perforated <b>BF</b> Fine Fluted Lens <b>BL</b> Smooth White Lens	<b>DMV</b> 0-10V Dimming	<b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K <b>50K</b> 5000K
		<b>S48W4800L</b> 48 Watts 4800 Lumens				
		<b>S57W5400L</b> 57 Watts 5400 Lumens				
		<b>H72W7000L</b> 72 Watts 7000 Lumens				
		_____ *				
	96L 96"	<b>S57W5400L</b> 57 Watts 5400 Lumens				
		<b>S96W9600L</b> 96 Watts 9600 Lumens				
		<b>S114W10800L</b> 114 Watts 10800 Lumens				
		<b>H144W14000L</b> 144 Watts 14000 Lumens				
		_____ *				

OPTIONS	
<b>WP</b>	6 ft. 3 wire 18 gauge whip
<b>WP10</b>	6 ft. 4 wire 18 gauge whip

**Note:**

\*Programmable LED drivers allow custom configured wattages and corresponding lumens.

We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.