



Texas Fluorescents
Reinvented

CATALOG#: _____
PROJECT: _____
TYPE: _____

Series F1303

Wet Location Close-To-Ceiling Round

Excellent for lighting residential exteriors, entry ways, stairways, walkways, perimeters, parking garages, storage areas, and warehouses. Choice of white or black molded plastic housing with white powder coated steel gear tray in a choice of styles. LED, incandescent or fluorescent versions with polycarbonate diffuser. UL Listed for wet locations. ENERGY STAR® qualified.

CONSTRUCTION

Molded of durable non-corrosive UV resistant resins.

MOUNTING

Wall or ceiling mount.

TYPICAL OPTIONS & ACCESSORIES

Photocell or motion sensor options. Contact factory for more details.



DIMENSIONS

9.375"Dia. x 4.50"H

FEATURES & BENEFITS

- Available in black or white housing with white lens
- Knockouts for conduit or photocell
- Screw-based A19 lamp included in either 3000K or 4000K Kelvin temperature (3000K standard)
- D120 unit: CRI >80, 120V TRIAC dimming and 5 year warranty
- MV unit: CRI >70, 120-277V and 3 year warranty
- Ambient operating temperature -40°C to 40°C
- L70: >50,000 Hours
- UL Listed for Wet Locations



CATALOG#: _____
PROJECT: _____
TYPE: _____

Series F1303
Wet Location Close-To-Ceiling
Round




ORDER INFORMATION

ITEM NUMBER	DESCRIPTION
F13032INCLPLEDWH	Round Ceiling Wet / 9.375"Dia x 4.5"H / 2x LED Lamp 9.5W A19 30K Incl. / 120V Dim / White
F1303L22W1824LMVWH40K	Round Ceiling Wet / 9.375"Dia x 4.5"H / 22W, 1824L / 120-277V / 4000K / White
F1303L23W1900LD120WH40K	Round Ceiling Wet / 9.375"Dia x 4.5"H / 23W, 1900L / 120V Dim / 4000K / White


For 3000K change 40K to 30K. For Black body, change WH to BK.

DRAWINGS & IMAGES

Front

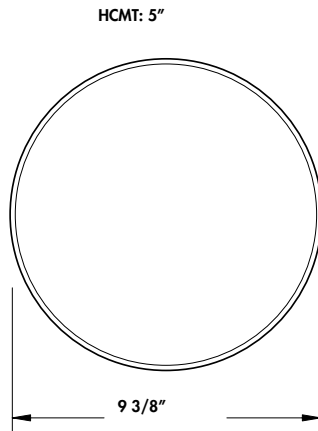

Side

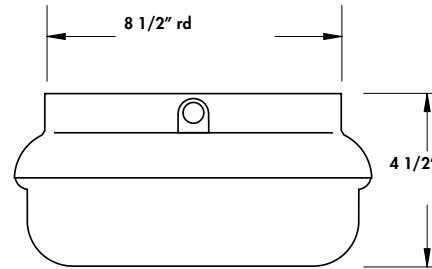

Note:
We reserve the right to change design, materials, LEDs and finish in any way that will not alter installed appearance or reduce function and performance.