

FEATURES & SPECIFICATIONS

INTENDED USE

LED Industrial high bay is a fully accessorized open frame fixture perfect for warehouse lighting. Premium full specular mirrored reflectors provide efficient lighting and maximum throw for medium to high mount applications. Built tough for industrial applications. Fully accessorized.

DIMENSIONS : L x H in inches

4ft Housing: 46.26L x 3.62Dp

CONSTRUCTION


Galvanized steel body. Code gage. Premium, full specular mirrored reflector with protective film. Multiple KOs and Access plate on back for rapid wiring.

MOUNTING

Designed for surface, pendant, stem or chain hanging. Mounting holes are provided for simple, fast installation.

TYPICAL OPTIONS AND ACCESSORIES

Emergency ballasts, Cord sets, whips, occupancy sensors, Hanging kits, Wire guards. Contact factory for additional options.

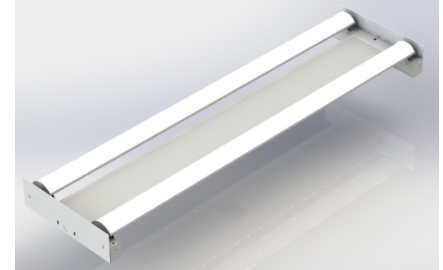

ORDERING INFORMATION

Example: HBG48LA355W50000LW30DMV50K


HBG48L		A355W50000L		W30		DMV		50K		Options	
Series		Lens		Reflector		Driver		Kelvin Temperature			
HBG48L 4ft LED High Bay Full Body		Blank No Lens FR Frosted Smooth Arcylic Lens		W30 White Steel reflector, no uplight, standard distribution		DMV 0-10V MV Multi - Volt 120V-277V 480V 480 Volt		40K 4000K 50K 5000K		MDT4 Occupancy Sensor Wide Angle MDF4 Occupancy Sensor and Daylight CS 5-15P 120V 8ft. Cord & Plug CS12 L7-15P 277V 8ft. Cord & Plug CS08 8ft. Cord, No Plug WP 6 ft. 3 wire, Whip WP10 6ft. 4 Wire, Whip	
SSHBG48L 4ft LED High Bay Full Body with Sensor - On/Off		Wattage and Lumen*									
		A132W18000L 132 System Watts, 18000 Delivered Lumens, 2 rows of LEDs									
		A175W25000L 175 System Watts, 25000 Delivered Lumens, 2 rows of LEDs									
		A215W30000L 215 System Watts, 30000 Delivered Lumens, 4 rows of LEDs									
		A280W40000L 280 System Watts, 40000 Delivered Lumens, 4 rows of LEDs									
		A355W50000L 355 System Watts, 50000 Delivered Lumens, 4 rows of LEDs									

*Consult Factory for different wattages.




DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

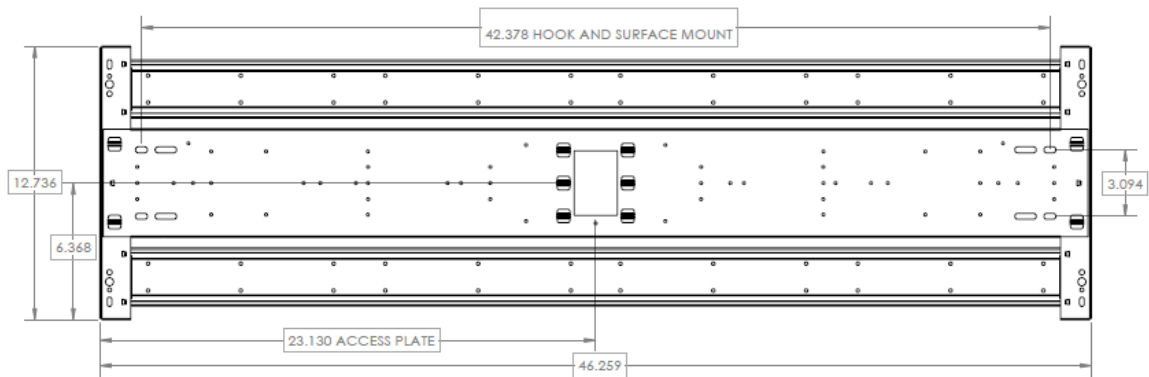


2 Rows of LEDs

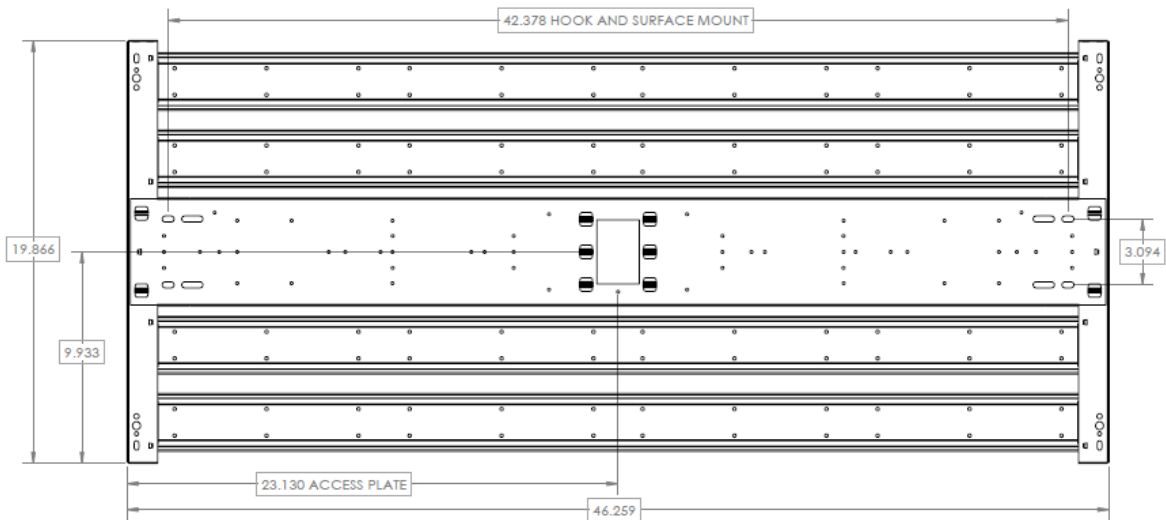

4 Rows of LEDs

Dimensions : L x H in inches
2ft Housing: 21.09L x 3.62Dp

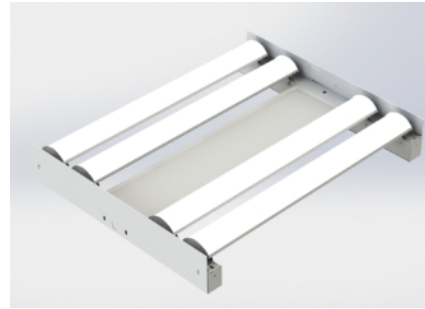


ORDERING INFORMATION

Example: HBG24LA175W25000LW30DMV50K


HBG24L	A175W25000L	W30	DMV	50K	Options
Lens		Reflector		Driver	
Blank	No Lens	W30	DMV	DMV	
FR	Frosted Smooth Arcylic Lens	White Steel reflector, no uplight, standard distribution	0-10V	MV	
			Multi - Volt 120V-277V	480V	
			480 Volt		
Series	Wattage and Lumen*		Kelvin Temperature		
HBG24L	A89W12000L		40K	4000K	MDT4 Occupancy Sensor Wide Angle
2ft LED High Bay Full Body	89 System Watts, 12000 Delivered Lumens 2 rows of LEDs		50K	5000K	MDF4 Occupancy Sensor and Daylight
SSHBG24L	A132W18000L				CS 5-15P 120V 8ft. Cord & Plug
2ft LED High Bay Full Body with Sensor - On/Off	132 System Watts, 18000 Delivered Lumens 4 rows of LEDs				CS12 L7-15P 277V 8ft. Cord & Plug
	A175W25000L				CS08 8ft. Cord, No Plug
	175 System Watts, 25000 Delivered Lumens 4 rows of LEDs				WP 6 ft. 3 wire, Whip
					WP10 6ft. 4 Wire, Whip

*Consult Factory for different wattages.

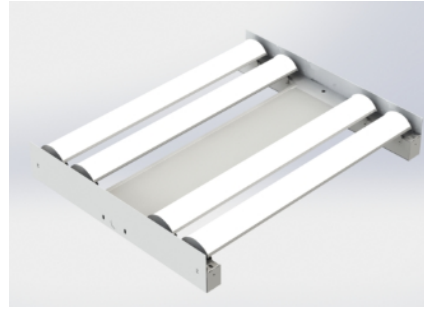


DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

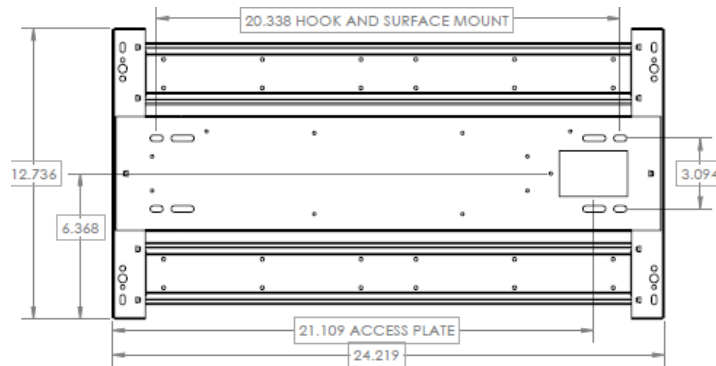

2 Rows of LEDs

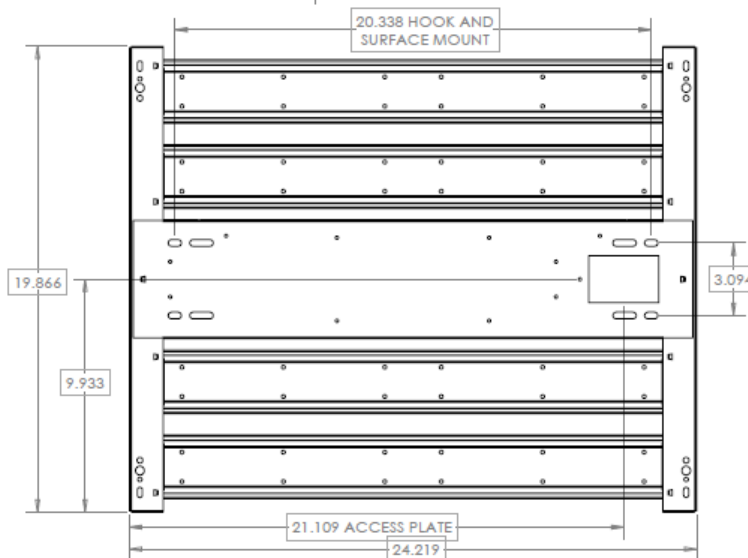

4 Rows of LEDs