

HOTWD Series

Coordinated design in surface fluorescent
close-to-ceiling wall and vanity

HOUSING

Die-formed Cold Rolled Steel

SHADE

Acrylic Diffuser/Frosted Glass

BALLAST

120V 60 Hz, Electronic Ballast

LAMP

(2) 13 Watt Plug-In or (2) 18 Watt Plug-In Fluorecents

EFFICACY


Meet California 2005 Title 24 Standard

CERTIFICATION

UL, cUL Listed, Energy Star Listed


SIZE

9.25W x 10.5L x 4.0H

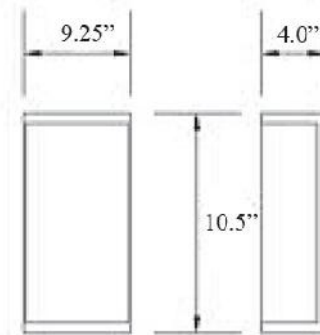

ORDERING INFORMATION

Example: HOTWD 213SSNLN

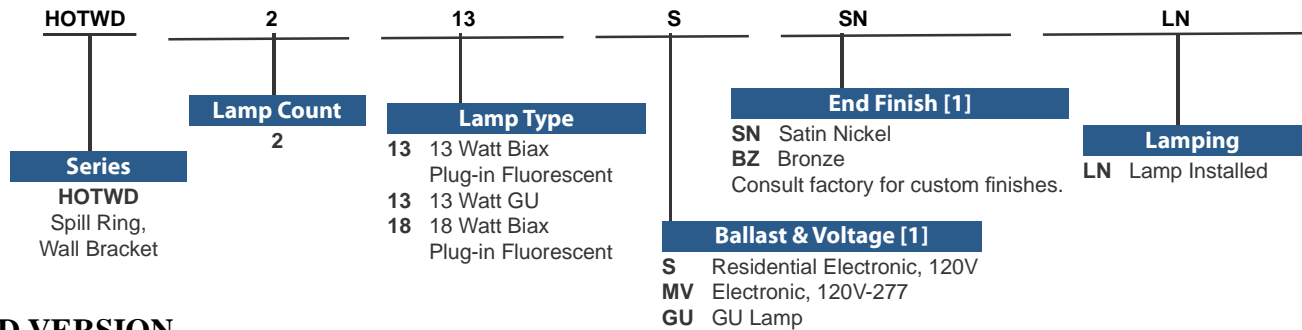

LED VERSION

- LED Driver: Constant Current Type
- UL Listed
- CRI >80
- Cool White, 5000K available upon request

Item #	Size (LxWxEXT)	Lamping
HOTWDL24W1200L30K	9" x 4" x 10.5"	24W, 1200 Lumens, 3000K

NOTE: Specifications and dimensions subject to change without notice. Consult your Texas Fluorecent Lighting Representative for availability and ordering information.

Catalog Number:
Notes: