



Texas Fluorescents
Reinvented

CATALOG#: _____

PROJECT: _____

TYPE: _____

Series JSR

LED Strip Fixture


This strip light is mainly for commercial use. It can be used in warehouse, office, garage, display shops and other commercial applications.

CONSTRUCTION

Housing is die-formed and embossed code 22 gage steel. Standard finish is high reflectance baked white enamel; chrome ends or full chrome body are available as an option. Wiring knockouts are provided on back of housing. Lens is fully captured by end plate. End cap held in place with acorn nut.

MOUNTING

Surface or pendant

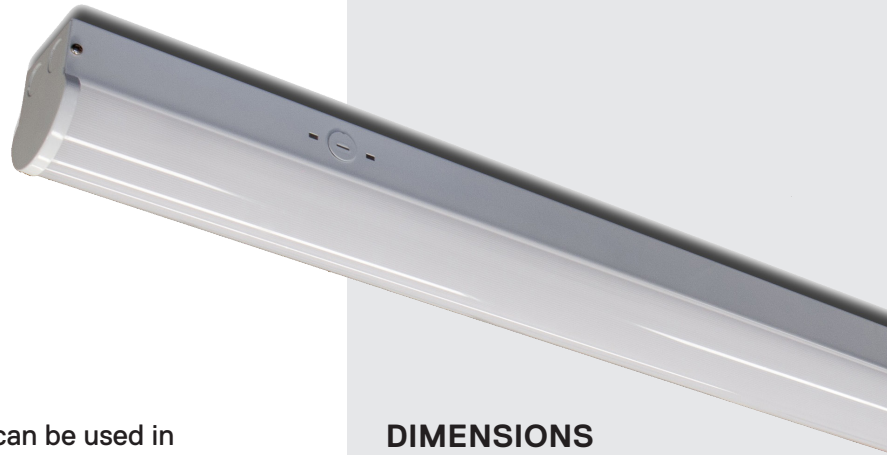

DIMENSIONS

8 ft - 95.9"L x 3.56"H x 3.35"W

4 ft - 48.0"L x 3.56"H x 3.35"W


FEATURES & BENEFITS

- Lumen output is more than 132-135 lumens per watt
- CRI >80
- Input voltage can be AC100-277V
- Reduces energy consumption up to 60%
- 5 year lifespan
- Surface/pendant mounting
- Suitable for damp location
- Glass free



DRAWINGS & IMAGES

End

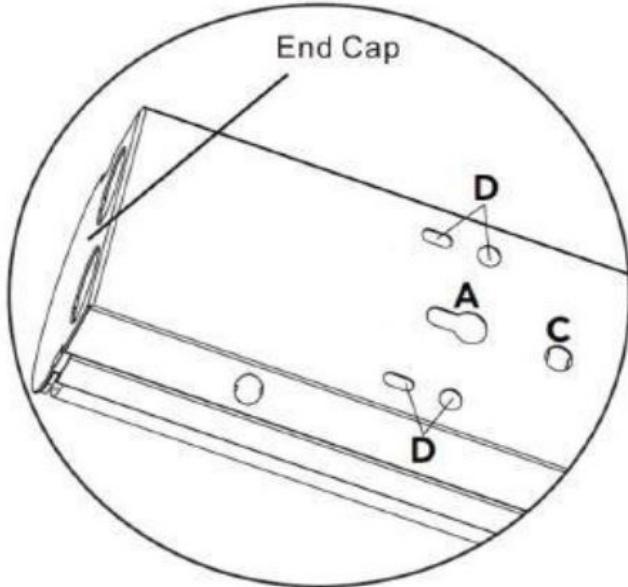


- A - Keyhole slots for surface mounting**
- B - Wiring knockouts**
- C - T-Bar clip mounting hole**
- D - V-Hook openings for chain mounting**

ORDER INFORMATION

SERIES	WIDTH	WATTAGE & LUMENS	DRIVER	COLOR
JSR	48L 48"	40W5400L 40 Watts 5400 Lumens	DMV 0-10V	35K 3500K 40K 4000K 50K 5000K
	96L 96"	60W8400L 60 Watts 8400 Lumens 68W9400L 68 Watts 9400 Lumens		


We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

Mounting options:

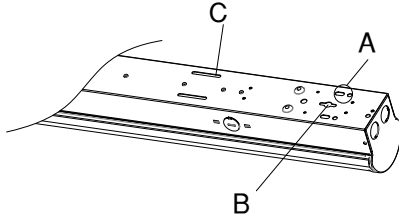


- A. Chain and V hook mounting
- B. Surface mounting
- C. Mounting plate installation


Installation Steps:

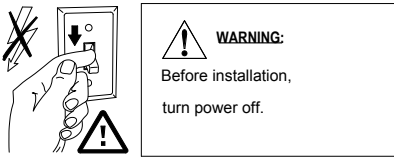


A. Chain and V hook mounting




1. Tie hook with chain (or wire rope) and then insert it into installation hole.



2. Fix chain to installation location, adjust the height of chain until fixture is balanced.




3. Connect AC wire and dimming wire.




4. Wrap wires with metal material.

B. Surface mounting




1. Lock the wire box cover.




2. Connect AC wire and dimming wire.

Notice:

If there is no wire box in the ceiling, you can not use the wire box cover.



3. Lift up the fixture and put wires into box.




4. Lock the fixture by nail.


Notice:

If you don't use dimming wire, please insulate both ends of dimming wire.

C. Mounting plate installation




1. Lateral movement and remove the diffuser.




2. Bend mounting plate, fixed to bottom of the fixture by screws, and then fix it to the installation position.

WARNING:

If connect wire at side, please insulate both ends of AC wire at the bottom.



3. Connect wire. If connect wire at side please insulate both ends of AC wire at the bottom.



4. Put the wire back in the box. Multiple fixtures can be installed on a line. But can not be connected to more than 10 fixtures because of limited wire load.

WARNING:

Multiple fixtures can be installed on a line. But can't be connected to more than 10 fixtures because of limited wire load.