

# Series L25RGBW

## LED Surface or Pendant Mount Linear Fixture

L25 RGBW Linear Channel allows RGB color changing abilities combined with white (3000k) light output to create billions of color variations as well as a pure white output. Full body micro silhouette makes a bold statement with a minimal design in post-painted in powder coated flat white polyester finish (consult factory for other finishes). Scaled to the LED module the matte white diffuser surrounds the LEDs for soft lighting. Fixture can be pendant mounted with specially engineering cable mounting kit. RGBW fixture is ideal to highlight walls to provide a "horizon" of color to create a unique environment. Surface mount version is ideal coves, behind valences or in niches.

### CONSTRUCTION

Die-formed and welded 22-gauge cold rolled steel. Easy to install. Fixtures are designed for individual runs only. For longer runs consult factory.

### DIFFUSERS

Special LED formulated frosted lenses with snap in feature for easy access.

### TYPICAL OPTIONS & ACCESSORIES

Cord sets, whips, occupancy sensors, hanging kits, etc. Contact factory for more details.



### DIMENSIONS

2ft.-24"L x 2.5"W x 3"H

4ft.-48"L x 2.5"W x 3"H


8ft.-96"L x 2.5"W x 3"H

### FEATURES & BENEFITS


- Can be surface mounted to the ceiling or pendant hung by engineered hanging kit.
- Attractive source of direct lighting for any indoor applications.
- Provides RGB colored lighting as well as white lighting. White lighting can be color tuned.
- Fixture has standard two wires, plus ground to wire to standard on/off switch.
- Installs with standard wiring and is controlled via Bluetooth with an easy to use App.
- Easy installation
- Available in custom finish. Consult factory for details.
- Suitable for dry or damp location
- 5 year warranty.

**DRAWINGS AND DIMENSIONS**


**4 ft. - Back View**

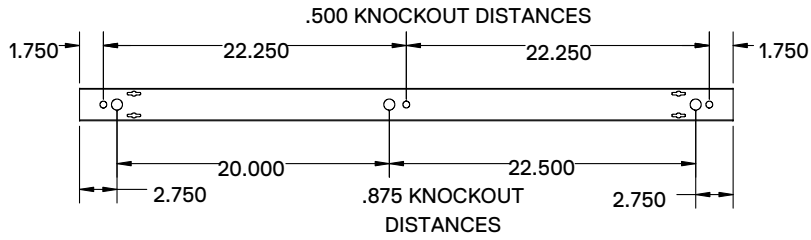

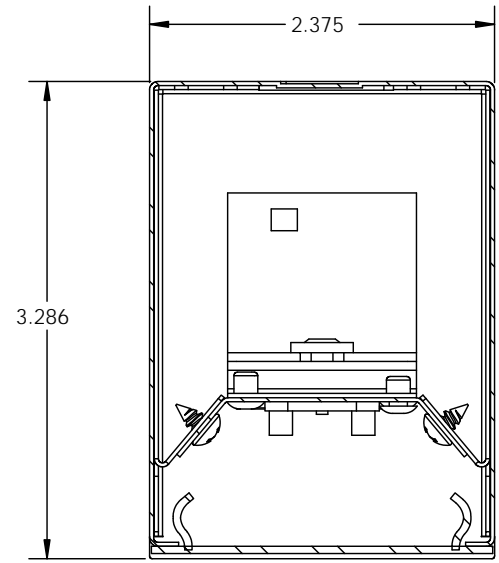

**END VIEW**

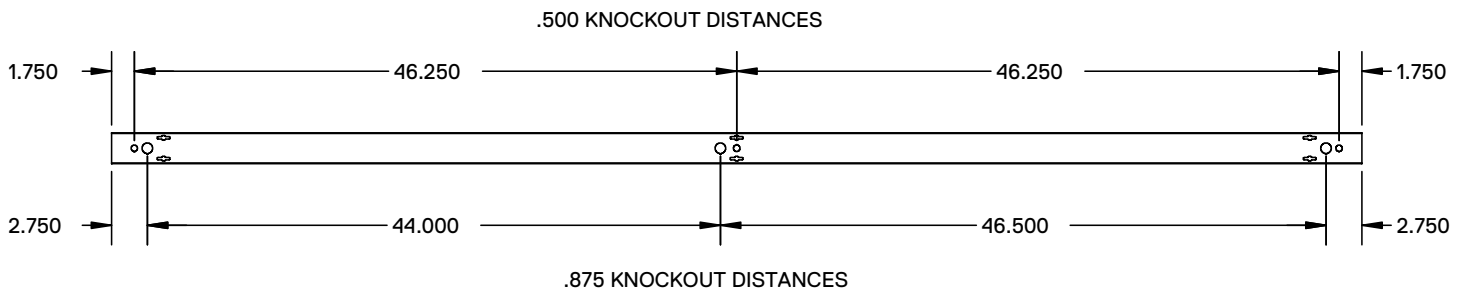

**8 ft. - Back View**



## ORDERING INFORMATION

SERIES	LENS MATERIAL	SIZE	WATTAGE	DRIVER	FINISH	RECEIVER	
L25P Pendant Mount	SF Frosted Lens	48L 48"	RGBW27W	MV 120-277V	WH BK SI	White Black Silver	<b>IL</b> Ilumi Receiver pairs with Ilumi Mesh Tek App (Free App)  <b>SR</b> RF Receiver pairs with 3 Zone RF RGBW Wall Mount Touch Panel, <b>SRTSR2820US3</b> (order separately) *Max. 2 fixtures per controller with max. range 10ft    <b>SRDMX</b> DMX receiver pairs with 3 zone DMX512 Wall Mount touch panel, <b>SRTSR2812US3</b> , requires AC to DC transformer 24V, <b>S RTP12009</b> (both items order separately)  
			RGBW54W				
		96L 96"	RGBW54W	RGBW Color Changing, 54 watt			
			RGBW108W	RGBW Color Changing, 108 watt			

### Harness and Hanging Kit Options

PI1	3 wires harness, including white, black and green
HC301WH	Cable kit with 4' Cable & 3 Wires Power Feed/Cable Incl. and White Canopy
HC302WH	Cable kit with 12' Cable & 3 Wires Power feed/Cable Incl. and White Canopy
HC3015WWH	Cable kit with 4' Cable & 5 Wires Power Feed/Cable Incl. and White Canopy
HC3025WWH	Cable kit with 12' Cable & 5 Wires Power feed/Cable Incl. and White Canopy
2SCS24WH	Two Stem kits with 24" Stem, Canopy and Mounting hardware for a 4' fixture

**Note:**

\*Programmable LED drivers allow custom configured wattages and corresponding lumens.

We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.



CATALOG#: \_\_\_\_\_  
PROJECT: \_\_\_\_\_  
TYPE: \_\_\_\_\_


**Series L25RGBW**  
**LED Surface or Pendant Mount**  
**Linear Fixture**

**ILUMI CONTROL**

Wire to standard on/off light switch and use the App to control all the features.

**Download free**  
**Ilumi MeshTek App**

from Apple or Android Store and start controlling color, tune your white light, create schedules or use preloaded effects.

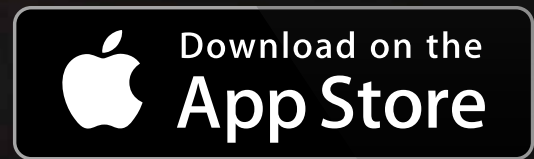

We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

2055 Luna Road Suite 142 | Carrollton, TX 75006  
T 214.884.1150 | F 972.247.0200 | sales@saylite.com

REV 05/01/2020