

## FEATURES

This compact but powerful flood light is a true innovation combining practicality and aesthetics. With highly efficient LED engine and precise optical control, greater lighting performance adds the value to its exterior appearance. Multiple mounting methods enable this fixture to be installed in any given environment.


## TECHNICAL SPECIFICATIONS

- IP65
- Solid construction die-cast aluminum body
- UV stabilized powder coated finish
- UL and CUL listed for wet locations
- Versatile mounting choices
- Optional photo control
- Finish – Bronze
- Standard Bronze



Optional photo control

## DIMENSIONS

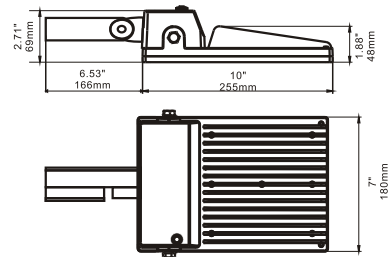

## SPECIFICATIONS

System watts	Lumen Output	Color	MA	Input Voltage	CRI	Starting Temp	Recommend Replacement
52	5522lm**	5000K	1260MA	120~277V	70+	-40°C	150W - 175W MH

## ORDERING INFORMATION

EX: LFL10L52W5550LMV50KBZ

Series	Wattage	@ a Yb	Driver	7c'cf HYa dYfh fY	Finish	*Recommend Replacements
<b>LFL10L</b>	<b>52W - 52 Wattage</b>	<b>5550L - 5522 Lumen</b>	<b>MV - 120-277V</b>	<b>50K - 5000K</b>	<b>BZ - Bronze</b>	<b>150-175W HID</b>

\*There recommendations are based actual performance with HID fixtures that have been installed for over 12 months.

Catalog Number:
Notes: