



Texas Fluorescents  
Reinvented

# LIN Series

## Linear Indirect Lighting



### FEATURES & SPECIFICATIONS

#### INTENDED USE

Indirect linear luminaire is available in 4' and 8' lengths. Low profile 2.1" height and 7.0" wide features a choice of die-cast end caps. (bullnose standard). High efficiency optics include specular aluminum reflector that is designed to provide wide distribution with 100% uplight.

#### SIZE W x L x H in inches

4 ft. - 7" x 48" x 2.0"

8 ft. - 7" x 96" x 2.0"

#### LAMP

1, 2 or 3 Lamp Positions in cross section. (3 on T5 only)

#### CONSTRUCTION

The die-formed steel housing is available with solid or perforated bottom, with riveted, heavy duty, die-cast aluminum mounting plates. The end caps are die-cast aluminum and factory installed. Housing and end caps are standard with our exclusive finish featuring an ultra durable white powder top coat. Custom finishes available.

#### END CAPS

Die-cast aluminum ends - factory installed.  
Bull-nose style with wing design available.

#### CONFIGURATION

Individual luminaires come with 2" bullnose end caps factory installed and function as a stand alone luminaire. Luminaires can also be combined in long runs by joining together Starters, Runners and Ends. Starters and Ends have a single "bullnose" end cap factory installed. Standard feed points are located at the Starter. Feed points can be placed at any of the runners to suit building layout or if required to meet electrical loads on longer runs.

#### LISTING

Fixtures conform to Underwriters' Laboratories standards for production and are carefully tested prior to packing.

#### TYPICAL OPTIONS AND ACCESSORIES

Emergency ballasts, cord sets, whips, occupancy sensors, hanging kits, wire guards. Contact factory for additional options.

### ORDERING INFORMATION

Example: LINPF2328MVWHHC301WH

LIN	PF	232	8	MV	WH	HC301	WH
<b>Series</b>		<b>Lamp Count Lamp Type &amp; Tandem Code [2]</b>				<b>Cable Kit</b>	<b>Cord/Canopy Finish</b>
LIN Linear Direct		<b>1 or 2</b>	<b>32</b> 48 in.T8 <b>8</b> 8ft. Tandem (Double lamp count) [4]			<b>HC301</b> 4 ft. cable kit <b>HC302</b> 8 ft. cable kit	<b>WH</b> White <b>BK</b> Black <b>BKWH</b> Black cord White canopy
		<b>1, 2 or 3</b>	<b>28</b> 46 in.T5 <b>8</b> 8ft. Tandem (Double lamp count) [4]				
	<b>Body Style</b>	<b>1, 2 or 3</b>	<b>54</b> 46 in.T5HO <b>8</b> 8ft. Tandem (Double lamp count) [4]				
	PF Perforated SD Solid MW White Lens LV Louver*			<b>Ballast &amp; Voltage [1]</b>	<b>Finish</b>		<b>Options</b>
				<b>MV</b> Electronic, Multivolt (120-277V) <b>HMV</b> Electronic, Multivolt, Hi-Lume [3] <b>DMV</b> Electronic, 0-10V Dimming	<b>WH</b> White <b>SL</b> Metallic Silver <b>RD</b> Red <b>IN</b> Iron <b>BK</b> Black		<b>EM</b> Emergency ballast 500 lumens <b>EM14</b> Emergency ballast 1400 lumens Note: EM14 for T5HO lamps

\* LV (Louver) only works with T5 lamps  
\* Provides 40% downlight

Saylite  
2055 Luna Rd. Suite 142 Carrollton, TX 75006  
Phone: 972-247-3171 Fax: 972-247-0200  
www.saylite.com email: sales@saylite.com



Catalog Number:
Notes:



Texas Fluorescents  
Reinvented

# LIN Series

Linear Indirect Lighting

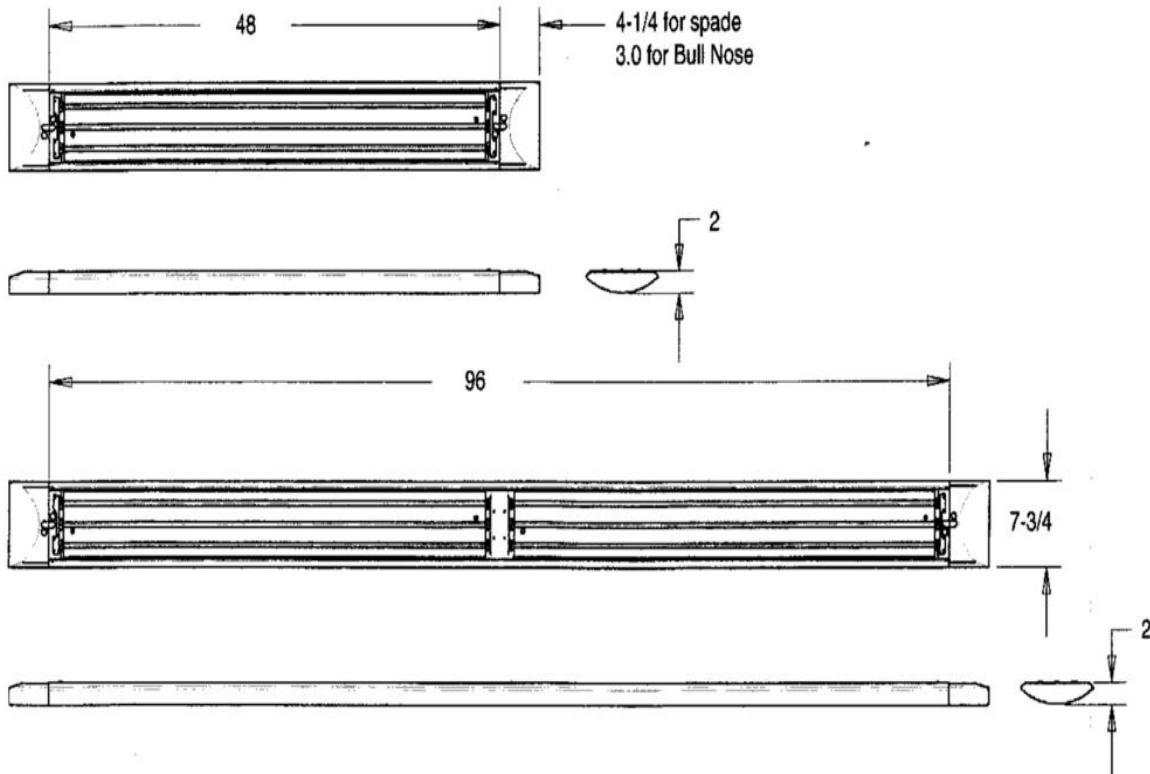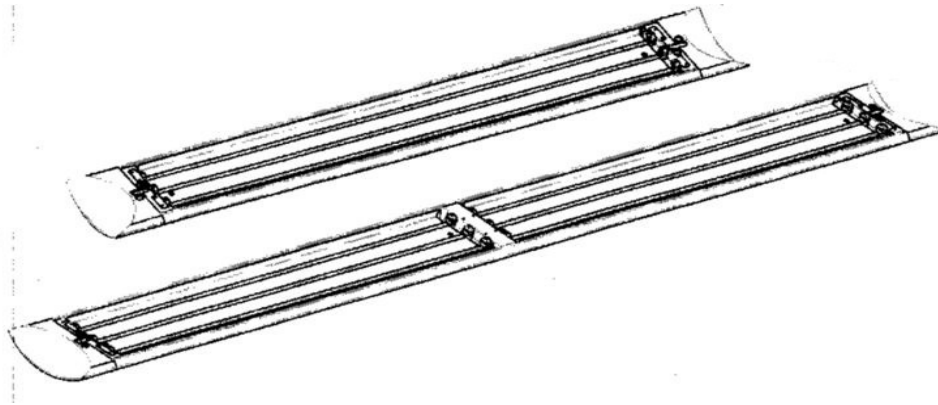

Saylite  
2055 Luna Rd. Suite 142 Carrollton, TX 75006  
Phone: 972-247-3171 Fax: 972-247-0200  
www.saylite.com email: sales@saylite.com

Catalog Number:

Notes: