



LPLIN Series

LED Low Profile Linear Lightin

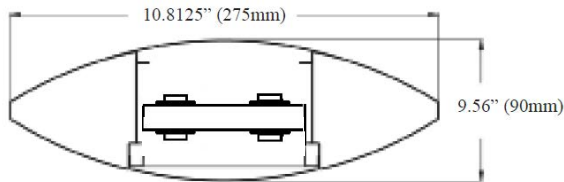

DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

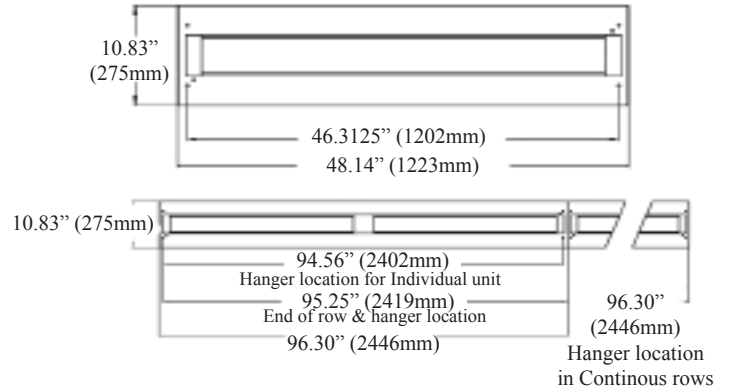

HIGH OUTPUT

Example: LPLINFR48LH72W8200LDMV40KWHHC401WH

4 FT- UP LIGHT or DOWN LIGHT ONLY

LPLIN	FR	48L	H72W8200L	DMV	40K	WH	HC401WH
Series	Lens	Size	Driver		Finish		Configuration
LPLIN Low Profile Linear	MW White Lens FR Frosted Lens	48L 48"	DMV	0-10V Dimming *Field installed-Dimming Wire	WH White SL Metallic Silver RD Red IN Iron BK Black	Blank Individual -B Beginner Run -E Ender Run -J Joiner	
Direct/Indirect		Wattage and Lumen		Color Temperature		Cable	
U Up Light Only Blank Down Light Only	H72W8200L	72 System Watts, 8200 Delivered Lumens	30K 3000K 35K 3500K 40K 4000K 50K 5000K	HC401WH 4 ft. cable kit with 3 wires Power Feed HC402WH 8 ft. cable kit with 3 wires Power Feed HC4015WWH 4 ft. cable kit with 5 wires Power Feed HC4025WWH 8 ft. cable kit with 5 wires Power Feed			

*Downlight Only.
Consult for Uplight.

*Custom louvers available in any cell configuration. Consult factory for additional information.

Saylite
2055 Luna Rd. Suite 142 Carrollton, TX 75006
Phone: 972-247-3171 Fax: 972-247-0200
www.saylite.com email: sales@saylite.com

Catalog Number:
Notes:

LPLIN Series

LED Low Profile Linear Lightin



T E X A S

F L U O R E S C E N T S



DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.



ORDERING INFORMATION STANDARD

Example: LPLINFR96LF97W11300LDMV40KWHHC401WH

8 FT- UP LIGHT or DOWN LIGHT ONLY

LPLIN	FR	96L	F97W11300L	DMV	40K	WH	HC401WH
Series	Lens	Size	Driver		Finish		Configuration
LPLIN Low Profile Linear	MW White Lens FR Frosted Lens	96L 96"	DMV 0-10V Dimming *Field installed-Dimming Wire		WH White SL Metallic Silver RD Red IN Iron BK Black		Blank Individual -B Beginner Run -E Ender Run -J Joiner
Direct/Indirect		Wattage and Lumen		Color Temperature		Cable	
U Up Light Only Blank Down Light Only	F97W11300L F114W12800L	81 System Watts, 8304 Delivered Lumens 114 System Watts, 12800 Delivered Lumens	30K 3000K 35K 3500K 40K 4000K 50K 5000K	HC401WH 4 ft. cable kit with 3 wires Power Feed HC402WH 8 ft. cable kit with 3 wires Power Feed HC4015WWH 4 ft. cable kit with 5 wires Power Feed HC4025WWH 8 ft. cable kit with 5 wires Power Feed			

*Downlight Only.
Consult for Uplight.

HIGH OUTPUT

Example: LPLINFR96LH144W16450LDMV40KWHHC401WH

8 FT- UP LIGHT or DOWN LIGHT ONLY

LPLIN	FR	96L	H144W16450L	DMV	40K	WH	HC401WH
Series	Lens	Size	Driver		Finish		Configuration
LPLIN Low Profile Linear	MW White Lens FR Frosted Lens	96L 96"	DMV 0-10V Dimming *Field installed-Dimming Wire		WH White SL Metallic Silver RD Red IN Iron BK Black		Blank Individual -B Beginner Run -E Ender Run -J Joiner
Direct/Indirect		Wattage and Lumen		Color Temperature		Cable	
U Up Light Only Blank Down Light Only	H144W16450L	144 System Watts, 16450 Delivered Lumens	30K 3000K 35K 3500K 40K 4000K 50K 5000K	HC401WH 4 ft. cable kit with 3 wires Power Feed HC402WH 8 ft. cable kit with 3 wires Power Feed HC4015WWH 4 ft. cable kit with 5 wires Power Feed HC4025WWH 8 ft. cable kit with 5 wires Power Feed			

*Custom louvers available in any cell configuration. Consult factory for additional information.

Saylite
2055 Luna Rd. Suite 142 Carrollton, TX 75006
Phone: 972-247-3171 Fax: 972-247-0200
www.saylite.com email: sales@saylite.com

Catalog Number:

Notes:

LPLIN Series

LED Low Profile Linear Lightin
Direct/Indirect



T E X A S

F L U O R E S C E N T S

ORDERING INFORMATION

Example: LPLINFR48LUF12WD24WDMV40KWHHC401WH

4 FT-UP and DOWN LIGHT

LPLIN	FR	48L	UF12WD24W	DMV	40K	WH	HC401WH	
Series	Lens	Size	Driver		Finish		Configuration	
LPLIN Low Profile Linear	MW White Lens FR Frosted Lens	48L 48"	DMV 0-10V Dimming *Field installed-Dimming Wire		WH White SL Metallic Silver RD Red IN Iron BK Black		Blank Individual -B Beginner Run -E Ender Run -J Joiner	
Wattage and Lumen			Color Temperature		Cable			
UF12WD24W Up Light 12 System Watts, Down Light 24 System Watts, 3600 Delivered Lumens			30K 3000K 35K 3500K 40K 4000K 50K 5000K		HC401WH 4 ft. cable kit with 3 wires Power Feed HC402WH 8 ft. cable kit with 3 wires Power Feed HC4015WWH 4 ft. cable kit with 5 wires Power Feed HC4025WWH 8 ft. cable kit with 5 wires Power Feed			
UF18WD36W Up Light 18 System Watts, Down Light 36 System Watts, 5400 Delivered Lumens								

*Downlight Only.
Consult for Uplight.

ORDERING INFORMATION

8 FT-UP and DOWN LIGHT

LPLIN	FR	96L	UF24WD48W	DMV	40K	WH	HC401WH	
Series	Lens	Size	Driver		Finish		Configuration	
LPLIN Low Profile Linear	MW White Lens FR Frosted Lens	96L 96"	DMV 0-10V Dimming *Field installed-Dimming Wire		WH White SL Metallic Silver RD Red IN Iron BK Black		Blank Individual -B Beginner Run -E Ender Run -J Joiner	
Wattage and Lumen			Color Temperature		Cable			
UF24WD48W Up Light 24 System Watts, Down Light 48 System Watts, 7200 Delivered Lumens			30K 3000K 35K 3500K 40K 4000K 50K 5000K		HC401WH 4 ft. cable kit with 3 wires Power Feed HC402WH 8 ft. cable kit with 3 wires Power Feed HC4015WWH 4 ft. cable kit with 5 wires Power Feed HC4025WWH 8 ft. cable kit with 5 wires Power Feed			
UF36WD72W Up Light 36 System Watts, Down Light 72 System Watts, 10800 Delivered Lumens								

*Downlight Only.
Consult for Uplight.

Plug in system Options - it's for continuous run application by simply plugging in sections together

Part Number	Descriptions
PI1	3 Wires Harness, Including White, Black and Green
PI2	4 Wires Harness, Including White, Black, Green and Blue for Emergency Battery Backup
PI3D	5 Wires Harness, Including White, Black, Green, Violet and Gray

* Add the accessories part numbers at the end to be factory installed

Saylite
2055 Luna Rd. Suite 142 Carrollton, TX 75006
Phone: 972-247-3171 Fax: 972-247-0200
www.saylite.com email: sales@saylite.com

Catalog Number:

Notes: