

Project	Type

Features and Benefits


Sleek, low profile cutoff wall pack is ideal for low level area lighting and security. The fixture, specially designed for LED, provides the output of a 60 Watt incandescent using only 14 Watts. Full cut off eliminates any light pollution.

General Specifications

- UL and CUL listed for wet locations
- IP66, dust and water jet proof; Weatherproof and durable silicone rubber gaskets, prevent water and bugs
- Corrosion resistant die-cast all aluminum construction and hardware
- Superior powder coat finish
- High impact polycarbonate lens
- **3 Year Warranty**

MLW Series

MINI WALL PACK

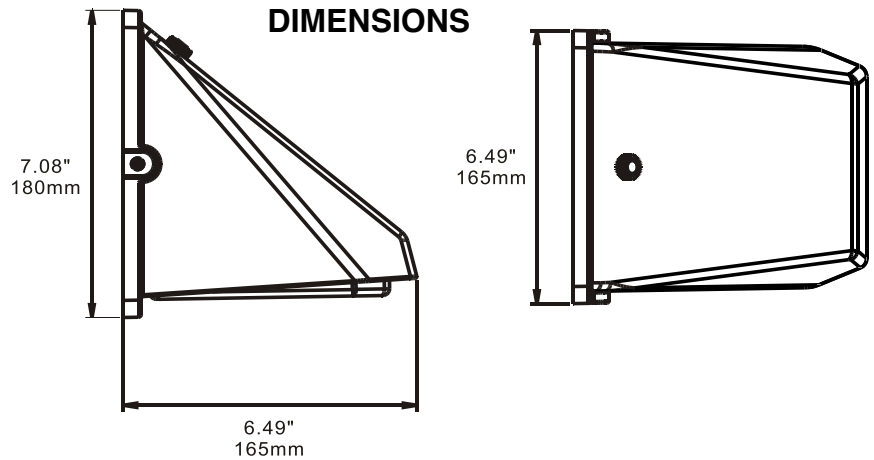

ELECTRICAL						
Volts	Input Watts	Amps	Power Factor	Ballast Factor	Min Start Temp	UL
120	14	0.2	0.5	1.00	-30°C	Yes

PHYSICAL						
Carton	Length	Width	Height	Weight	Mount	Finish
6	6.49	6.49	7.08	3.30	Flush	Bronze

Powered by **CREE**™
LEDs

Example: **MLW6L14W750L50KBZ**

SERIES	SIZE	WATTS/LUMENS	COLOR TEMP	FINISH	OPTIONS*
MLW - Mini Wall Pack	6L - 6" Wide	14W750L - 14 Watts/750 Lumens	50K - 5000 Kelvins	BZ - Bronze	PC120 - 120V Photocell PC277 - 277V Photocell

*For factory installed photocell, add to end of part number.