

Series OSL

Outdoor Sign Lighter



FEATURES & SPECIFICATIONS

INTENDED USE

Specification grade fixture, sealed aluminum extrusion with lens for outdoor applications. The OSL series is a durable fixture used in both parking and commercial / retail outdoor areas for sign and walkway lighting.

SIZE W x L x H in inches (mm)

5.25W x 3.06H (135 x 75)

Available in 48 and 96in nominal lengths. See dimensional view for actual size.

LAMP

1 or 2 lamp position.

MATERIALS & FEATURES

Aluminum extrusion with white interior and cast aluminum end plates. The diffuser / lens is a smooth clear acrylic. Available in 4 and 8 foot nominal lengths; single and tandem lamp configurations available with four foot lamps. Integral ballast for 54W T5HO lamp configurations; remote ballast for T12HO lamps. Integral junction box on one end of fixture permits wiring connection within enclosure.

- Fixtures may be coupled for continuous runs without additional accessories
- Sign lighters rotate up to 360 degrees

MOUNTING

Fixtures are typically mounted on conduit.

LISTING


Fixture and Ballast: UL Listed.

Ballast: Thermally protected, class P, HPF, Non PCB.

TYPICAL OPTIONS AND ACCESSORIES

See options page at the end of the T02HARSH section, or contact factory for more details.

ORDERING INFORMATION

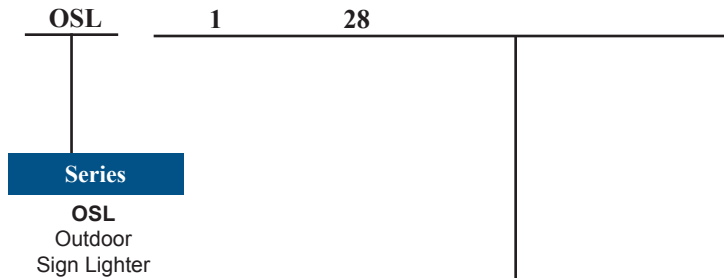


Lamp Count	Lamp Type [1] & Tandem Code [2]
------------	---------------------------------

1	28 48 in. T5 4 ft. nominal length
1 or 2	54 46 in. T5 4 ft. nominal length
1 or 2	54 8 46 in. T5HO Slimline 8ft. Tandem (2 lamp positions total)

T5HO Fixtures have INTEGRAL BALLAST
Tandem fixture doubles total lamp count (2 or 4)

Example: OSL128E120

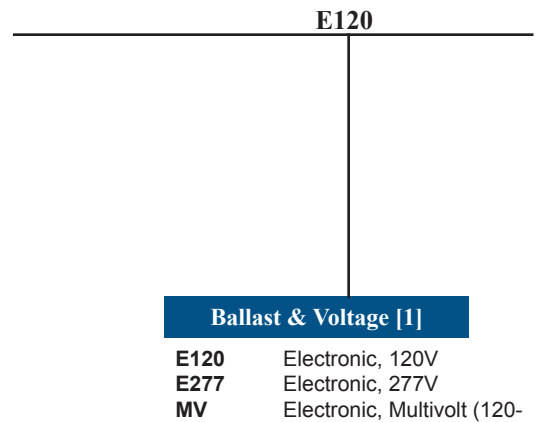

Notes

[1] See end of T02Harsh section for many additional lamps, ballasts, finishes, and options.

[2] Tandem doubles length and lamp count. Same lamps in cross section, additional lamps end to end.



DIMENSIONS

All dimensions are inches. Specifications subject to change without notice. The dimensions below represent the 2 ft. and the 4 ft.

