

CATALOG#: _____

PROJECT: _____

TYPE: _____

R2 Series

Fixed Optics Incandescent Emergency Unit



STANDARD



ILLUMINATION

- Two fixed optics 5.4W glare-free lamp heads.
- Smooth thermoplastic reflector and plastic lens for optimal light distribution.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- LVD (Low voltage disconnect) prevents battery from deep discharge.

MOUNTING

- Surface mount via easy connect back plate, which fits most standard junction boxes and snaps into place making internal electrical connections.
- Suitable for wall mount.


HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- ETL Listed for damp locations (20°C – 50°C).

DIMENSIONS

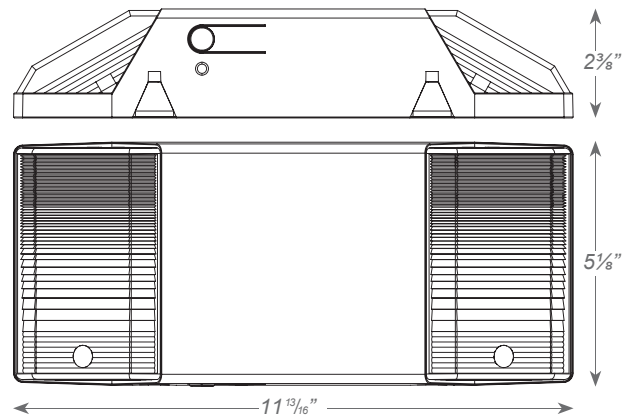

ORDERING INFORMATION

Sample Part Number: R-2

| MODEL | HOUSING COLOR | |
|-------|---------------|-------|
| | R-2 | Blank |
| | B | Black |

CATALOG#: _____
PROJECT: _____
TYPE: _____

R2 Series

Fixed Optics Incandescent
Emergency Unit

ELECTRICAL INFORMATION

| CATALOG NUMBER | INPUT WATTS (W) | | INPUT AMPS (A) | |
|----------------|-----------------|------|----------------|-------|
| | 120V | 277V | 120V | 277V |
| R-2 | 4.0 | 5.0 | 0.045 | 0.020 |