




Texas Fluorescents
Reinvented

CATALOG#: _____
PROJECT: _____
TYPE: _____

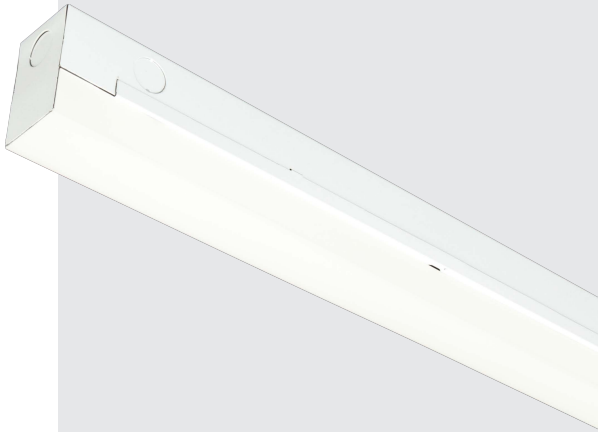

Series RKD

2"W Low Profile LED Surface Mount

Economical LED enclosed strip ideal for providing energy efficient lighting with low maintenance and long life. Highly engineered for quick installation with multiple knockouts, flip down ballast cover for easy wiring and specially designed lens tabs for lens installation. Lens is formulated to maximize light output and minimize direct glare LED image is visible but output is enhanced. Available in 2', 4' and 8' versions for individual or continuous runs. Lens reduces dust and other particles getting on LED's to increase life and performance. White is standard finish but other power coating finish are available.

CONSTRUCTION

Die-formed and welded 22-gauge cold rolled steel. Knockouts on ends allow continuous wireway mounting.

TYPICAL OPTIONS & ACCESSORIES

Cord sets, whips, occupancy sensors. Contact factory for more details.

DIMENSIONS

- 24L - 24"L x 1.96"W x 2.93"H
- 48L - 46"L x 1.96"W x 2.93"H
- 96L - 96"L x 1.96"W x 2.93"H

FEATURES & BENEFITS

- Fully assembled housing is formed and welded, 22 gauge steel
- Available in white and other finishes
- Smooth frosted lens to maximize light output
- Multiple knockouts for easy installation
- Consult factory for custom length or custom finish
- Suitable for commercial or residential areas
- CRI >80 (90 CRI avail)
- >50,000 hrs of L70 LED life
- 0-10 Volt dimmable 120-277V (120 ELV/Triac avail)
- Power factor >0.90
- Suitable for dry and damp locations
- 5 year warranty





Texas Fluorescents
Reinvented

CATALOG#: _____
PROJECT: _____
TYPE: _____

Series RKD
2"W Low Profile LED
Surface Mount

ORDER INFORMATION

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

SERIES	LENS		LENGTH		* W * L		DRIVER		COLOR		CRI	
					WATTAGE & LUMENS							
RKD 2"W Low Profile LED Surface Mount	FR	Frosted Smooth Lens	24L	24"	J12W1200L	12 Watts 1200 Lumens	DMV G120 D1MV	0-10V Dimming ELV/Triac dimming at 120V only 0-10V Dimming (dim to 1%)	30K 3000K 35K 3500K 40K 4000K 50K 5000K	Blank 80 CRI 90 90 CRI		
					J24W2400L	24 Watts 2400 Lumens						
			48L	48"	J24W2400L	24 Watts 2400 Lumens						
					J35W3500L	35 Watts 3500 Lumens						
					J48W4800L	48 Watts 4800 Lumens						
			96L	96"	J48W4800L	48 Watts 4800 Lumens						
					J70W7000L	70 Watts 7000 Lumens						
					J96W9600L	96 Watts 9600 Lumens						


FINISH		OPTIONS	
WH	White	EM	10W Emergency battery backup (remote only)
BK	Black	EM12	12W Emergency backup (remote only)
SI	Silver	EM20	20W Emergency backup (remote only)
		HC3015WWH	4' Cable & 5 Wires Power Feed/Cable Incl. and White Canopy Cable kit with
		HC3025WWH	12' Cable & 5 Wires Power feed/Cable Incl. and White Canopy
		2SCS24WH	Two Stem kits with 24" Stem, Canopy and Mounting hardware for a 4' fixture

Note:


*Programmable LED drivers allow custom configured wattages and corresponding lumens.
We reserve the right to change design, materials, LEDs and finish in any way that will not alter installed appearance or reduce function and performance.

DRAWINGS & IMAGES


2 FT

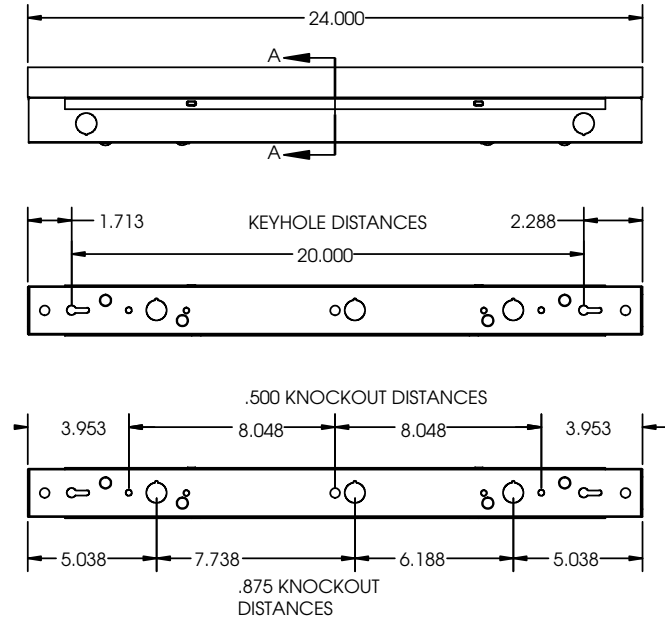

End Side View


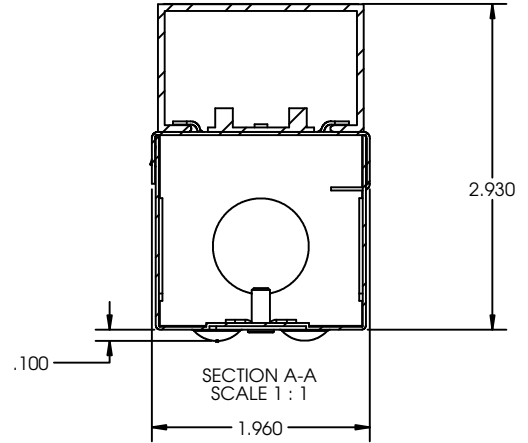


4 FT

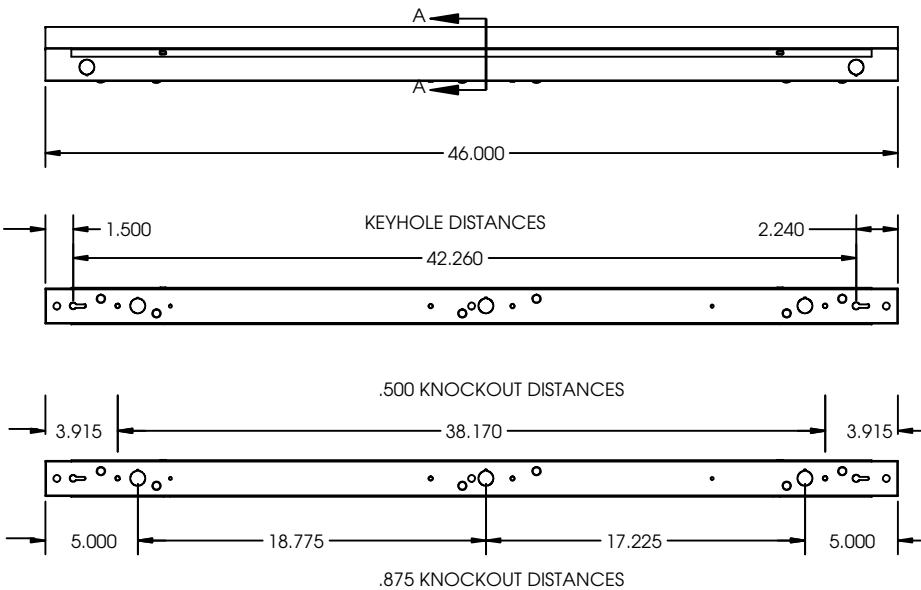

DRAWINGS & IMAGES

8 FT

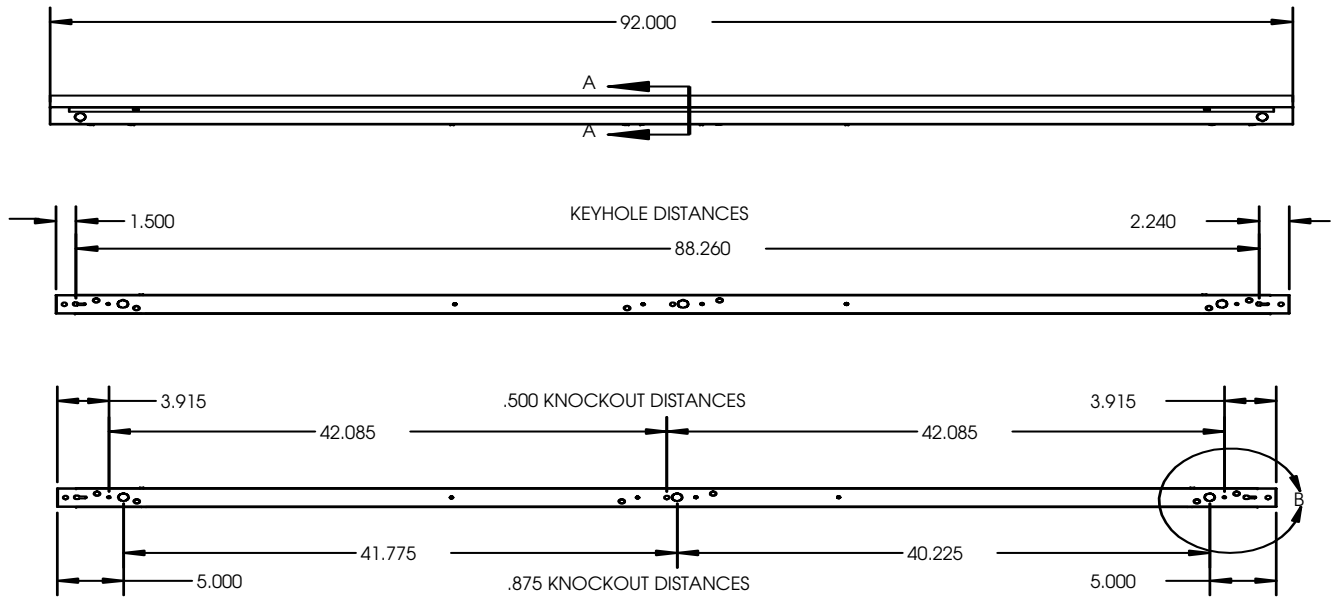

PART NO.	DESCRIPTION
ORKDFR24L	Replacement Frosted lens for 24"
ORKDFR48L	Replacement Frosted lens for 48"
ORKDFR96L	Replacement Frosted lens for 96"