

CATALOG#: _____

PROJECT: _____

TYPE: _____

WLEZXTEU

Compact Wet Location LED Exit Sign



STANDARD



OPTIONAL



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Polycarbonate mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- 5VA flame retardant, UV-stabilized polycarbonate in white, black or gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure with engineering grade silicone gasket.
- K/O's provided for conduit feed applications.
- EZ snap-out chevron directional indicators.


OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- TP: Tamper-proof hardware helps prevent unauthorized access to the unit.
- Custom: Signs available with requested "special" wording.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (-20°C – 50°C).
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

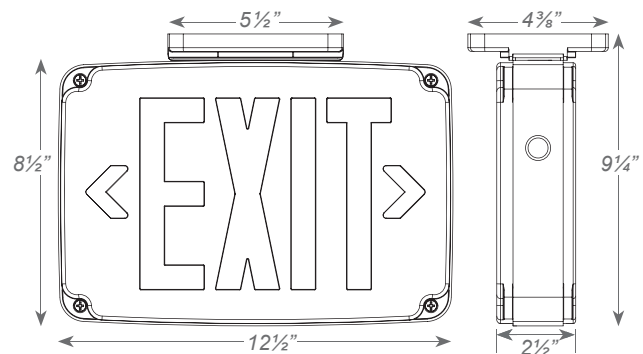

ORDERING INFORMATION

Sample Part Number: **WLEZXTEU-1-R-W-EM-CW**

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY		OPTIONS
WLEZXTEU	1 Single Face	R Red	W White (with white faceplate)	Blank AC Only	CW	Cold Weather ¹ (applies to the EM and SDT only)
	2 Double Face	G Green	B Black (with black faceplate)	EM Battery Backup		SDT Self-diagnostics ¹ TP Tamper-Proof
			G Gray (with white faceplate)			2C Dual circuit ² CUSTOM Custom Wording

Special voltage & SALIDA face plate options available. Check with your Best Lighting Representative.

¹ Available in EM units only.

² Available in AC units only.

CATALOG#: _____

PROJECT: _____

TYPE: _____

WLEZXTEU

Compact Wet Location
LED Exit Sign



ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
WLEZXTEU-RED/GREEN	2.7	2.7	0.025	0.011
WLEZXTEU-RED/GREEN/EM/SDT	3.3	3.4	0.030	0.014
WLEZXTEU-RED/GREEN-2C	2.4	2.4	0.023	0.011