



Texas Fluorescents
Reinvented

WLIN 4ft Indirect Wall Mount



FEATURES & SPECIFICATIONS

INTENDED USE

Specification grade, low profile indirect wall mount with majority uplight and smooth forward throw light, the WLIN is a sleek wall mount companion to the pendant mount indirect LIN (see T02PEND, LIN series). High efficiency optics include specular aluminum reflector that is designed to provide wide distribution with 100% uplight. This wall mount is ideal for brightening perimeters of offices or spectacular wall lighting systems for corridors.

SIZE W x L x H in inches (mm)

5.03W x 49.25L x 2.68Dp (130 x 1250 x 70)

5.03W x 98.00L x 2.68Dp (130 x 2490 x 70) Tandems

MATERIALS & FEATURES

Housing is die-formed and embossed code 20 gage steel with die cast aluminum end caps. Standard finish is powder coat white. Custom colors available. An enhanced white aluminum reflector is included.

- Continuous row mounting
- Post Painted Power Coat Finish
- White standard, Custom colors available

MOUNTING

Wall bracket mount.

TYPICAL OPTIONS AND ACCESSORIES

Options of drivers and custom colors.
Companion wall mount fixture to the LIN series indirect pendant.

ORDERING INFORMATION

Example: WLINPF48LUZ48W4800LDMV40K

STANDARD

WLIN		PF	48L	UZ57W5400L		DMV	40K	Finish	
Series		Size		Wattage and Lumen		Driver		Color Temperature	
WLIN Indirect Wall Mount LIN Companion		48L	49.25"	UJ32W3450L	32 System Watts, 3450 Delivered Lumens	DMV	0-10V Dim	Blank	White (standard) Custom colors available
Body Style				UZ48W4800L	48 System Watts, 4800 Delivered Lumens			Function	
PF	Perforated			UZ57W5400L	57 System Watts, 5400 Delivered Lumens			Blank	Standard Fixture includes end caps
SD	Solid							J	Joiner -No end caps are furnished with joiner sections
MW	White Lens								
LV	Louver								

NO END CAPS ON JOINER SECTIONS.
The WLIN series may be mounted in continuous rows.
One pair of end caps are required per row.
For individual mount, order standard fixture.
For a continuous row, order one standard & balance as joiners.

* Consult for more options

Saylite
2055 Luna Rd. Suite 142 Carrollton, TX 75006
Phone: 972-247-3171 Fax: 972-247-0200
www.saylite.com email: sales@saylite.com

Catalog Number:
Notes:

WLIN 8ft Indirect Wall Mount

LIN Series



Mounted on Ceiling

WLIN Series



Mounted on Wall

DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.



ORDERING INFORMATION

Example: WLINPF96LUJ48W4800LDMV40K

STANDARD

WLIN		PF	96L		UJ48W4800L		DMV		40K			
Series			Size		Wattage and Lumen		Driver		Color Temperature		Finish	
WLIN Indirect Wall Mount LIN Companion			96L 98.00"		UJ48W4800L 48 System Watts, 4800 Delivered Lumens UZ97W9600L 97 System Watts, 9600 Delivered Lumens UZ114W10800L 114 System Watts, 10800 Delivered Lumens		DMV 0-10V MV Multi - Volt 120V-277V		30K 3000K 35K 3500K 40K 4000K 50K 5000K		Blank White (standard) Custom colors available	
Body Style		Function										
PF	Perforated	Blank Standard Fixture includes end caps										
SD	Solid	J Joiner -No end caps are furnished with joiner sections										
MW	White Lens											
LV	Louver											

* Consult for more options

Catalog Number:
Notes:

WLIN

Indirect Wall Mount

LIN Series



Mounted on Ceiling

WLIN Series




Mounted on Wall

* Companion to the LIN series pendant mount indirect

DIMENSIONS


All dimensions are inches. Specifications subject to change without notice.

END VIEW

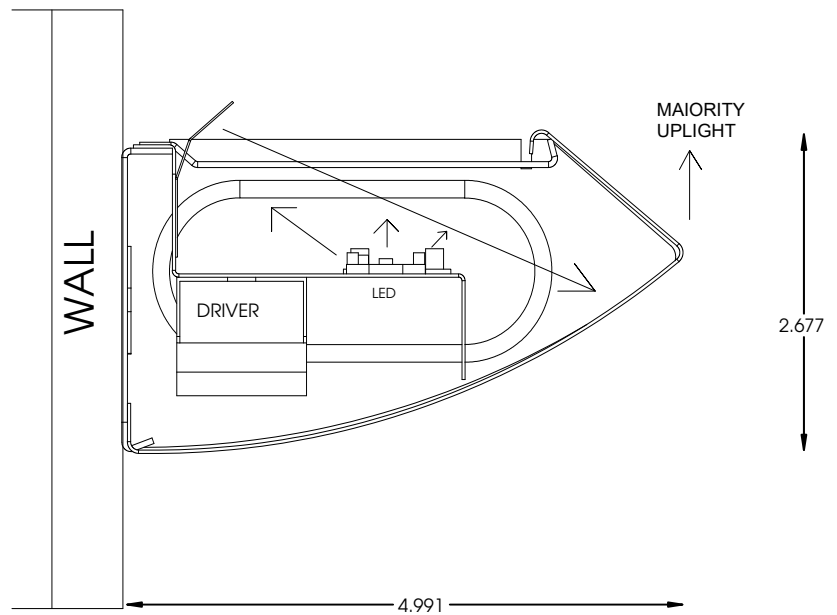


4-FOOT MODEL

TOP VIEW



8-FOOT MODEL

TOP VIEW

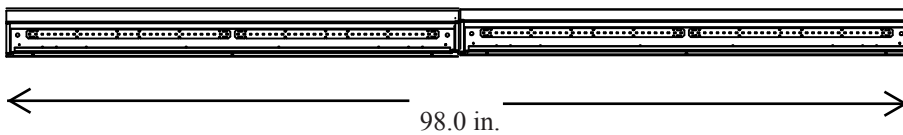

* Consult for more options

Catalog Number:
Notes: