

WLIN 4ft

Direct/Indirect Wall Mount

FEATURES & SPECIFICATIONS

INTENDED USE

Specification grade, low profile direct / indirect wall mount with up and forward throw optics, the WLIN is a sleek wall mount companion to the pendant mount indirect LIN (see T02PEND, LIN series). This wall mount is ideal for brightening perimeters of offices or spectacular wall lighting systems for corridors.

SIZE W x L x H in inches (mm)

5.03W x 49.25L x 2.68Dp (130 x 1250 x 70)

5.03W x 98.00L x 2.68Dp (130 x 2490 x 70) Tandems

MATERIALS & FEATURES

Housing is die-formed and embossed code 20 gage steel with die cast aluminum end caps. Standard finish is powder coat white. Custom colors available. An enhanced white aluminum reflector is included.

- CONTINUOUS ROW MOUNTING
- POST PAINTED POWDER COAT FINISH
- White standard, Custom colors available

ORDERING INFORMATION



MOUNTING

Wall bracket mount.

TYPICAL OPTIONS AND ACCESSORIES

Options of drivers and custom colors.

Companion wall mount fixture to the LIN series direct / indirect pendant.

Example: WLINPF48LH48W4800LDMV40K

STANDARD

WLIN		PF	48L		H57W5400L		DMV	40K	Finish		
Series			Size		Wattage and Lumen		Driver				
WLIN Direct/Indirect \Wall Mount \LIN Companion			48L 49.25"		E32W3450L 32 System Watts, 3450 Delivered Lumens H48W4800L 48 System Watts, 4800 Delivered Lumens H57W5400L 57 System Watts, 5400 Delivered Lumens		DMV 0-10V MV Multi - Volt 120V-277V		Blank White (standard) Custom colors available		
Body Style		Function									
PF	Perforated	Blank	Standard Fixture includes end caps								
SD	Solid	J	Joiner -No end caps are furnished with joiner sections								
MW	White Lens										
LV	Louver										
		Color Temperature									
		30K		3000K							
		35K		3500K							
		40K		4000K							
		50K		5000K							

NO END CAPS ON JOINER SECTIONS.
 The WLIN series may be mounted in continuous rows.
 One pair of end caps are required per row.
 For individual mount, order standard fixture.
 For a continuous row, order one standard & balance as joiners.

* Consult for more options

Catalog Number:
Notes:

WLIN 8ft

Direct/Indirect Wall Mount



LIN Series



Mounted on Ceiling

WLIN Series



Mounted on Wall

DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.



ORDERING INFORMATION

Example: WLINPF96LS48W4800LDMV40K

STANDARD

WLIN		PF	96L		S48W4800L		DMV		40K		Finish	
Series			Size		Wattage and Lumen		Driver		Color Temperature		Blank White (standard) Custom colors available	
WLIN Direct/Indirect Wall Mount LIN Companion			96L 98.00"		E48W4800L 48 System Watts, 4800 Delivered Lumens H97W9600L 97 System Watts, 9600 Delivered Lumens H114W10800L 114 System Watts, 10800 Delivered Lumens		DMV 0-10V MV Multi - Volt 120V-277V		30K 3000K 35K 3500K 40K 4000K 50K 5000K			
Body Style		Function										
PF Perforated	SD Solid	Blank Standard Fixture includes end caps										
MW White Lens	LV Louver	J Joiner -No end caps are furnished with joiner sections										

* Consult for more options

Catalog Number:
Notes:

WLIN

Direct/Indirect Wall Mount



LIN Series



Mounted on Ceiling

WLIN Series




Mounted on Wall

* Companion to the LIN series pendant mount indirect

DIMENSIONS


All dimensions are inches. Specifications subject to change without notice.

END VIEW

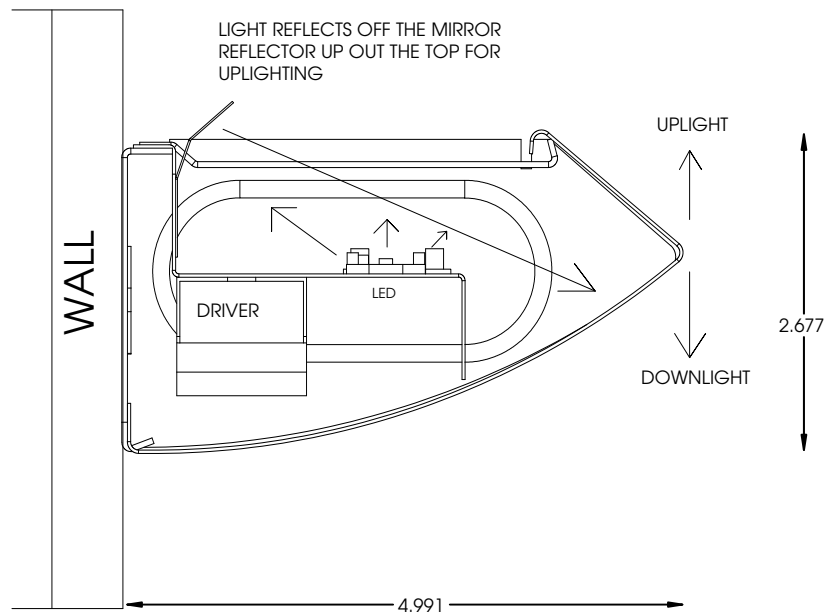


4-FOOT MODEL

TOP VIEW



8-FOOT MODEL

TOP VIEW

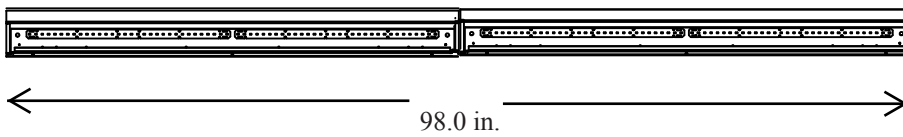

* Consult for more options

Catalog Number:
Notes:

Texas Fluorescents
 2055 Luna Rd. Suite 142 Carrollton, TX 75006
 Phone: 972-247-3171 Fax: 972-247-0200

www.texasfluorescents.com email: sales@texasfluorescents.com