



SAYSPEC

BY SAYLITE

SAYLITE.COM
972-247-3171



Miami Series Architectural Luminaires



Pole Mount Full Cutoff



Post Top
Round and
Soft Square
Forms

MIAR31Q

| LUMEN OUTPUT (4K CCT) | |
|-----------------------|-------------|
| Housing-Wattage | Lumen Range |
| Miami - 37W | 4600-5500 |
| Miami - 65W | 8000-9700 |
| Miami - 100W | 11900-14900 |
| Miami - 140W | 16400-21800 |

NOTE: Variance based on mounting configuration and optical distribution

Miami Round &
Square Canopy



MIAR32Q

MIAS32Q



MIAS31Q



L70
25°C
327,000 Hours




MIAS30Q

MIAR30Q

Specifications:

- Housing:** Die cast copper-free aluminum, no recycled content, automated silicone gaskets
- Listing:** CSA UL1598 Wet Location, IP66
- Hardware:** Nickel-Plated Stainless Steel hardware
- Wattage:** LED 37w-140w
- LED Arrays:** 100% pure aluminum circuit boards with conformal coating
- Optics:** IES Roadway Types II, III, IV and V
- Driver:** 120-277V, 50/60Hz or 347-480V, 50/60Hz; less than 20% THD and PF>0.90. Standard internal surge protection 6kV. 0-10V Dimming
- Controls:** Photocells, 3, 5 and 7-pin twist lock photocell receptacles, internal microwave motion sensors

IES ROADWAY DISTRIBUTIONS
3K, 4K, 5K CCT

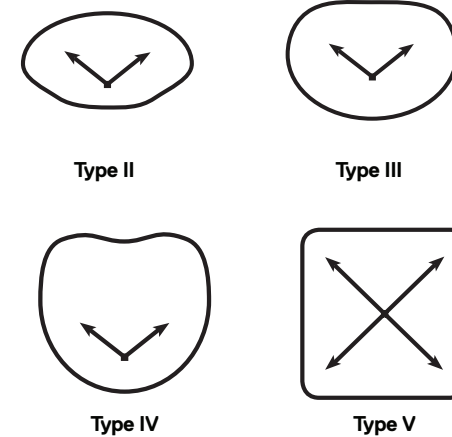

Complementary Wall, Wall Sconce, & Bollard



MIAR20Q
17w, 2150 Lumens

MIAS20Q
17w, 2150 Lumens

MIARWS20Q
17w, 2150 Lumens

MIASWS20Q
17w, 2150 Lumens

MIARB20Q
17w, 2100 Lumens

MIASB20Q
17w, 2100 Lumens



Austin Series Architectural Post Top



Pole Mount Full Cutoff



Round Open with Clear or Opal Array Lens

AUS80Q

L70
25°C **362,000 Hours**

Round with Full Clear Lens



AUS81Q

Square Open with Clear or Opal Lens



AUSS80Q



AUS71Q

Round with Clear or Opal Full Lens



AUS70Q

L70
25°C **473,000 Hours**

Round Open with Clear or Opal Array Lens



| LUMEN OUTPUT | | | |
|----------------------|-------------|----------------------|-------------|
| Housing-Wattage | Lumen Range | Housing-Wattage | Lumen Range |
| Austin AUS80 - 100W | 7500-8000 | Austin AUS81 - 100W | 6500-7500 |
| Austin AUS80 - 176W | 15500-19500 | Austin AUS81 - 176W | 15500-16500 |
| Austin AUSS80 - 100W | 7500-8100 | Austin AUSS80 - 176W | 15500-20000 |
| Austin AUS70 - 37W | 2700-2800 | Austin AUS71 - 37W | 2200-2300 |
| Austin AUS70 - 65W | 4800-5000 | Austin AUS71 - 65W | 3800-4000 |
| Austin AUS70 - 84W | 7000-8300 | Austin AUS71 - 84W | 5600-7000 |

NOTE: Variance based on mounting configuration and optical distribution



Specifications

Housing: Die cast copper-free aluminum, no recycled content, automated silicone gaskets
Listing: CSA UL1598 Wet Location, IP66
Hardware: Nickel-Plated Stainless Steel hardware
Wattage: LED 37w-176w
LED Arrays: 100% pure aluminum circuit boards with conformal coating
Optics: IES Roadway Types III and V, Clear and Opal Lens
Driver: 120-277V, 50/60Hz or 347-480V, 50/60Hz; less than 20% THD and PF>0.90. Standard internal surge protection 6kV, 0-10V Dimming
Controls: Photocells, 3, 5 and 7-pin twist lock photocell receptacles, internal microwave motion sensors



AUS30Q
37-84w, 2290-7900 Lumens



AUS32Q
100-176w, 8800-17500 Lumens

Austin Canopies

Complementary Wall Sconce & Bollard




WBAUS3Q
16w, 1600 Lumens



WBAUS4Q
16w, 1600 Lumens



AUS3Q
16w, 1600 Lumens



AUS4Q
16w, 1600 Lumens

Phone: 972-247-3171

Email: sales@saylite.com

KNOXVILLE FAMILY


ARCHITECTURAL AREA, FLOOD & WALL LIGHTING

Uniform Architectural Appearance and Seamless Aesthetic Style



- KNO55Q**
 272-512w, 23000-72500 Lumens
- KNO45Q**
 99-315w, 11500-45500 Lumens
- KNO25Q**
 65-112w, 3880-16000 Lumens
- KNO15Q**
 22-56w, 1560-7500 Lumens


Versatile, Multiple Optics, Variety of Mounting Options

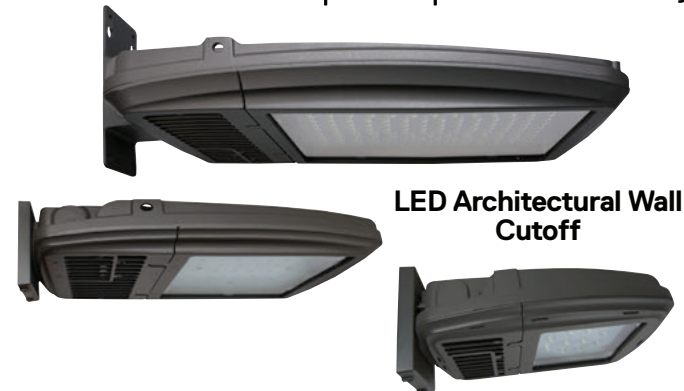

LED Architectural Wall Cutoff

- 4 sizes, multiple wattages replacing 50-1500w HID
- Mounting heights 16 to 50 feet
- IES Types I, II, III, IV, V and Narrow Beam Optics
- IP66 Sealed Optics, 3K, 4K, 5K CCT

Mounting Options:

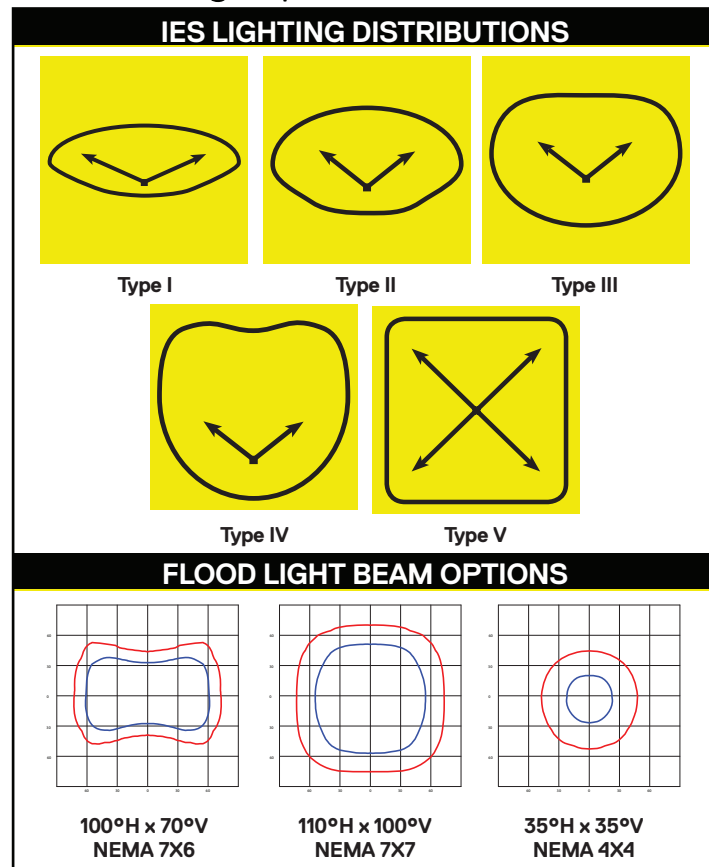

Architectural Full Cutoff

Philadelphia Architectural Full Cutoff



PHI30Q
Shown with PHIDP12
Twin Pole Mount Arm



PHI30Q
Shown with PHIDP11
Wall Mount Arm

The Philadelphia PHI30 decorative pendant luminaire combines contemporary style and LED technology for site lighting.

- Full Cutoff Type III and V optics
- Clear Polycarbonate or low glare diffusers
- Mounting heights - 12 to 25 feet
- 37-84 Input Watt; 2,990-9,700 Lumens
- 70w to 250w HID replacement
- 3-pin, 5-pin and 7-pin twist lock photocell or motion sensor
- CSA: Listed for Wet Locations, IP66



Mini Knoxville Bollards



KNOB1Q Mini Knoxville Single Bollard
22-37w; 2560-4900 Lumens

KNOB2Q Mini Kitty Hawk Twin Bollard
44-76w; 5120-9800 Lumens

Birmingham Area and Flood Light



BIR35Q
174-262w, 18000-34500

BIR55Q
348-524w, 35,500-69,500 Lumens

65,000+ Lumens

Phone: 972-247-3171

Email: sales@saylite.com



Pittsburgh Series

Architectural Poles for LED Luminaires






LED Architectural Wall Cutoff

PIT Straight Square Steel Poles

Shown with "P2" Tenon without Base Cover. Bronze Finish

PIT Straight Round Aluminum Poles

Shown with "P3" Tenon with Base Cover. Black Finish

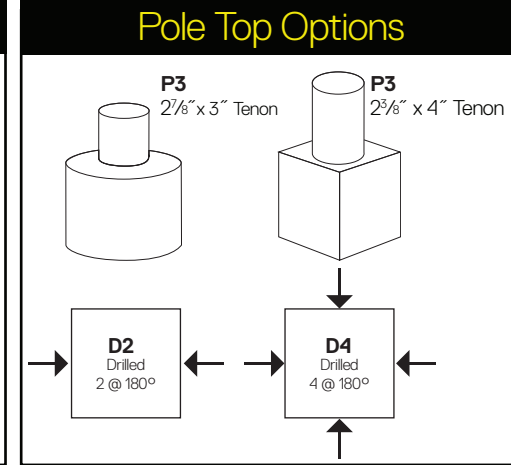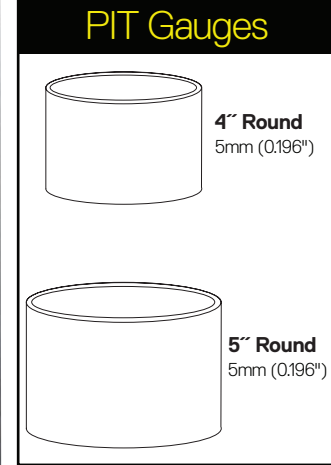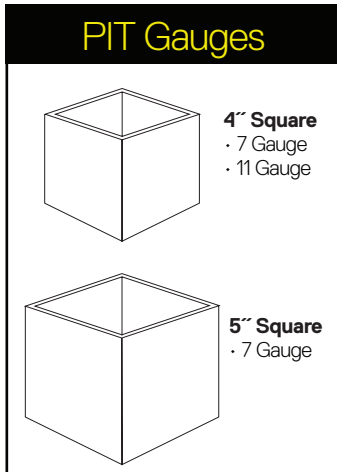

Pole Availability

| Pole Type | Length | | | | | | | | | | |
|---------------------------------|--------|----|----|----|----|----|----|----|----|----|--|
| | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 25 | 28 | 30 | |
| 4" Straight Square Steel, 11 Ga | X | X | X | X | X | X | X | X | | | |
| 4" Straight Square Steel, 7 Ga | X | X | X | X | X | X | X | X | | | |
| 5" Straight Square Steel, 7 Ga | X | X | X | X | X | X | X | X | X | X | |
| 4" Straight Round Aluminum 5mm | X | X | X | X | X | X | | | | | |
| 5" Straight Round Aluminum 5mm | X | X | X | X | X | X | X | X | | | |

Notes:

- Steel poles are ASTM-A500 Grade B, maximum yield strength, 46,000 PSI.
- Aluminum poles are 6063-T6 Alloy.

Poles are available in a wide variety of lengths, wall thickness and diameters.

- Two piece square base cover and polycarbonate spring loaded top cover included.
- Poles are provided with reinforced hand-hole and cover.
- Four anchor bolts with leveling nuts and template are provided.
- Pole top tenon selections include 4" high x 2 3/8" or 3" high x 2 1/8" diameter.
- Poles can be drilled for side mount, polycarbonate plugs included.



PIT24A4B
Decorative Base



PIT 4" Fluted
Aluminum Pole

Denver Full Cutoff



DEN45Q
81-174, 9700-21500 Lumens



DEN44Q
25-81, 3150-9300 Lumens

Chicago Full Cutoff LED Wall Packs



CHI12Q
22w, 1930-2260 Lumens



CHI15Q
25-37w, 2570-4200 Lumens



CHI20Q
56w, 5700-6600 Lumens

Omaha Full Cutoff LED Wall Pack




OMA36Q
47w, 5100 Lumens

Charlotte Full Cutoff LED Wall Packs



CHA35Q
23-47w, 2300-5000 Lumens

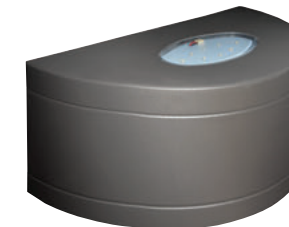

CHA36Q
46w, 5500-6000 Lumens

Tuscon Full Cutoff Wall Packs



TUC2C3
20-40w, 2300-4100 Lumens



TUC3C3
60-80w, 6600-8300 Lumens

Phone: 972-247-3171



Email: sales@saylite.com



Jackson

LED Gooseneck Lighting


3 Easy Steps to Specify

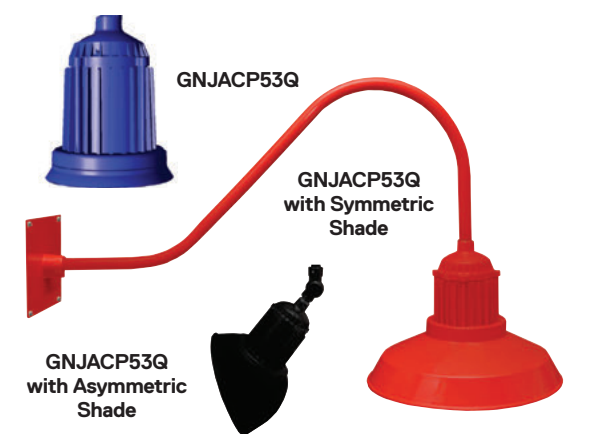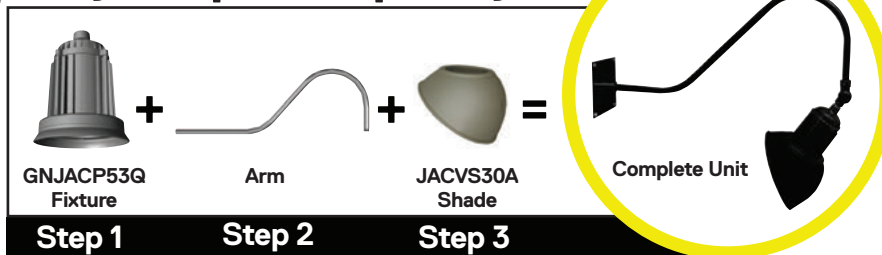

Gooseneck LED luminaires provide a wide range of lumen outputs and photometric distributions to provide accent lighting throughout the project.

- Luminaires are available with 3K, 4K and 5K CCT
- Super Durable Powdercoat finish in 4 colors
- Custom color on special order.
- LED 23w; 50w to 175w HID replacement
- CSA: Listed for Wet Locations, IP66

3 Luminaires - 5 Arms

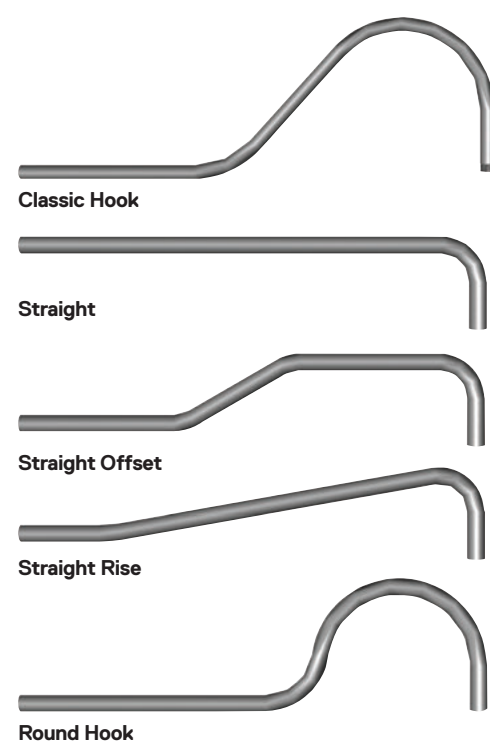

Gooseneck LED lighting allows the designer to create multitudes of design looks with differing lighting effects.

Arms are available in 5 different shapes and lengths to meet projects needs for wall accent lighting. Two mounting plate options add strength and durability.

| Model | Length |
|------------------------|--------------------------------------|
| GNA013 Classic Hook | 36=36" 30=30" |
| GNA023 Straight | 30=30" 24=24" 18=18" 12=12" |
| GNA033 Straight Offset | 30=30" 24=24" |
| GNA043 Straight Rise | 30=30" |
| GNA053 Round Hook | 30=30" 24=24" 18=18" |

Jackson Series Vaporproof



Detroit Round & Square LED Bulkheads



Clean contemporary styled wall mount luminaires designed with highly efficient optics.

- The Detroit Bulkhead family offers square and round luminaires with multiple faceplate designs.
- Ideal mounting heights are 8 to 20 feet.
- Coin plugs on all four sides provide easy conduit access and control options.
- IP66 sealed optics and driver compartment.
- LED arrays are designed specifically for each faceplate design for optimal output.

Houston Bullet Flood/Spot Lights



12V
12V Option Available

Bozeman Round & Square Low Profile Pathway Bollards



BOZB1C3
16w, 2290 Lumens



BOZB2C3
16w, 2410 Lumens

Reno Round & Square Bollards



REN1Q
23w, 1340-2100 Lumens



REN2Q
23w, 1290-2140 Lumens

Portland Full Cutoff Bollards, Path Lights, Wall Mount



180° & 120° Shield Available

POR5Q
16-17w, 490-710 Lumens



DWPOR5Q
16-17w, 490-710 Lumens



WBPOR5Q
16-17w, 490-710 Lumens



NPPOR5Q
16-17w, 490-710 Lumens



NBPOR5Q
16-17w, 490-710 Lumens



12V Option Available

Boise Pillar Top Luminaires



BO1BPTQ
23w, 1340-2100 Lumens



BO1PTQ
23w, 1340-2100 Lumens



BO12PTQ
23w, 1290-2140 Lumens



BO12CPTQ
23w, 1290-2140 Lumens

Nashville Path Light



NAS20Q
14w, 1,550 Lumens



12V Option Available



Bismarck Series

Hazardous Location LED Luminaires




Bismarck Series

Hazardous Location LED Luminaires



Bismarck Hazardous Location Explosion Proof Luminaire

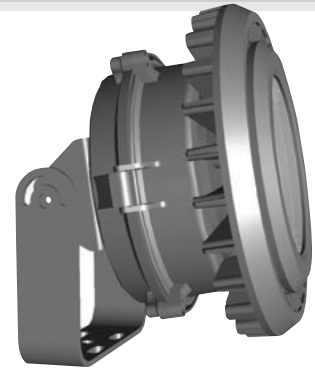


BISP15Q
Flood Shown with
Adjustable Yoke
57w, 9000 Lumens




BISP15Q
Pendant Mount
57w, 9000 Lumens




BISP15Q
Ceiling Mount
57w, 9000 Lumens

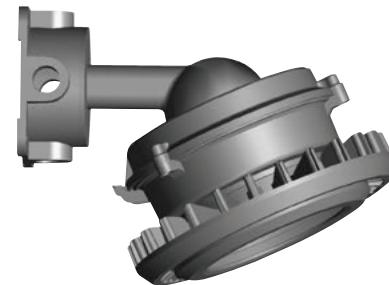


BISP15Q
Shown with 25° Wall Mount
57w, 9000 Lumens

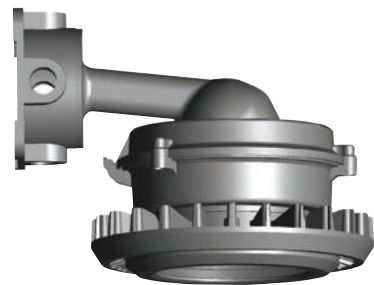

BISP15Q
Shown with 90° Wall Mount
57w, 9000 Lumens

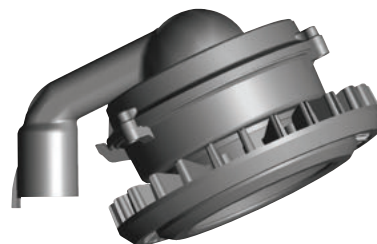

BISP15Q
Shown with 25° Stanchion
57w, 9000 Lumens

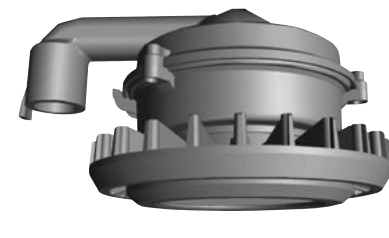

BISP15Q
Shown with 90° Stanchion
57w, 9000 Lumens



Bismarck Hazardous Location Explosion Proof Linear LED Die Cast



BIS2AQ
47-66w, 5700-10300 Lumens



BIS4AQ
112-136w, 13500-20000 Lumens



BIS1AQO
Open Frame
22-37w, 2830-5600 Lumens



BIS1AHQ
Horizontal Frame
22-37w, 2280-4900 Lumens



BIS1AVQ
Vertical Frame
22-37w, 2600-5300 Lumens



BISF25Q
132w, 15500 Lumens



Bismarck Hazardous Location Explosion Proof Flood



BY SAYLITE

Lighting done right.

2055 Luna Road Suite 142

Carrollton, TX 75006

T 972-247-3171

F 972-247-0200

www.saylite.com

sales@saylite.com

REV. 062520