


# THL-Pendant Mount Installation Instructions

## Overview

### WARNINGS

- This product must be installed in accordance with all applicable codes by a person familiar with the product.
- Each fixture must be **properly supported** during install.
- **DO NOT** join fixtures on the floor prior to lifting, or damage will occur.
- **Before beginning installation**, review our complete list of warnings by visiting [www.saylite.com/warnings](http://www.saylite.com/warnings).

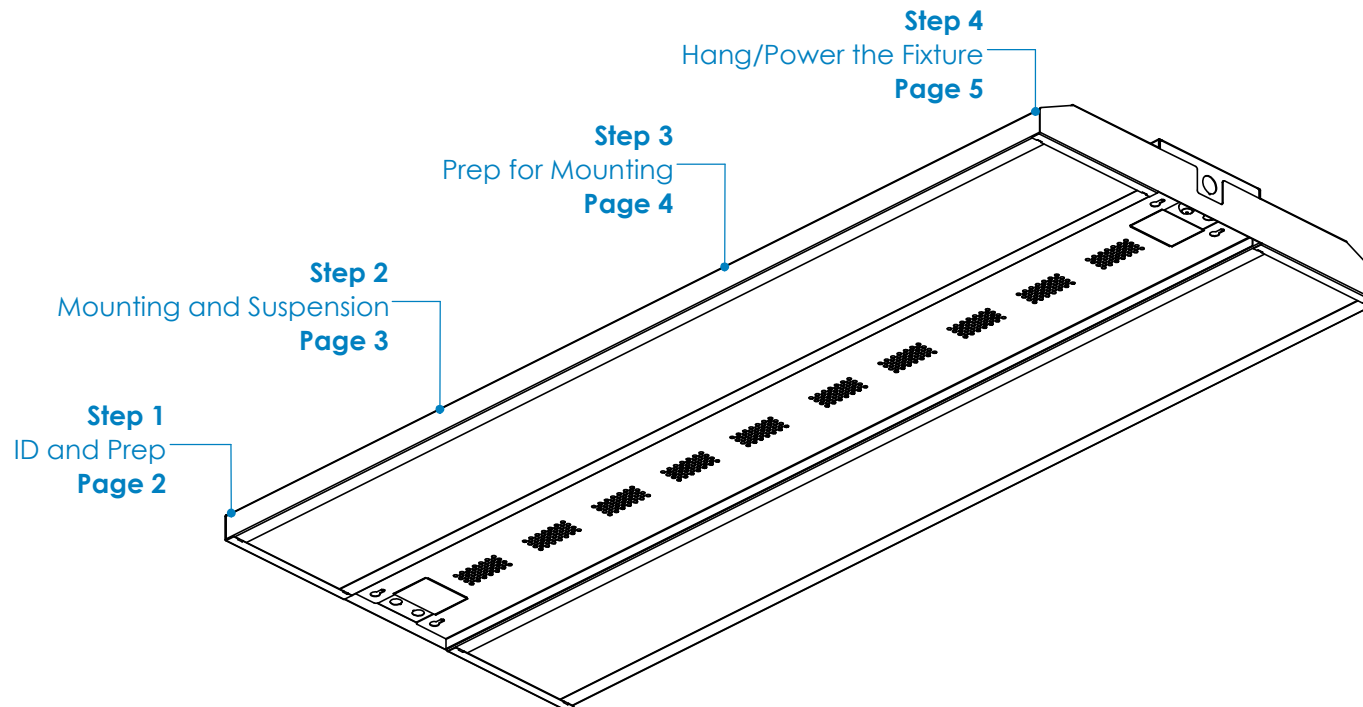

Your particular build may vary.

2020© Saylite | 2055 Luna Road, Suite 142 Carrollton, Texas 75006 | [www.saylite.com](http://www.saylite.com)

# THL-Pendant Mount Installation Instructions


## Step 1 - Identification and Preparation

### A. Identify Fixtures

<b>SayliteLED</b> Texas Fluorescents Reinvented	
PART# THLPFRxxXxxLBxxDMV	
VOLTAGE: 120-277V, 50/60HZ	CCT: XXXX K
WATTAGE: XX MAX	DATE CODE: XX/XX/XX
FLUX: XXXX LUMENS	TYPE: XX

- Use labels found on the box and inside the fixture bodies to identify bodies.
- **NOTE:** Locations of labels can vary.
- Remove all fixtures from their boxes.
- Organize fixtures based on their labels at the install location.


### B. Tools Needed



Screwdrivers



Pliers



Safety Glasses

- Always use proper safety equipment when installing fixtures.
- Tools shown are recommended for standard install. Tools needed may vary based on actual install location conditions.

### Kitted Hardware

- Saylite has provided the items listed here, with their Saylite part numbers listed. These items can be found in separate boxes shipped with the fixture.
- Ensure all parts are accounted for and set them aside until needed.
- Any additional hardware needed for this installation will be provided by others.

# THL-Pendant Mount Installation Instructions

## Step 2 - Mounting and Suspension

### Mounting

#### Drywall or other hard surfaces - HC 204/301 Hanging Kit\*


- Install hanging kits at suspension locations.
- Ensure hanging kits are secure.
- Prepare fixture for mounting.

Other hard surfaces include: wood, sheet metal panels, steel beams, concrete or masonry. Use hardware appropriate for each surface and material type.

#### Suspension Locations

**X** = Suspension Dimensions



Refer to Assembly Drawings and building plans to determine exact mounting, suspension points, and power feed locations.

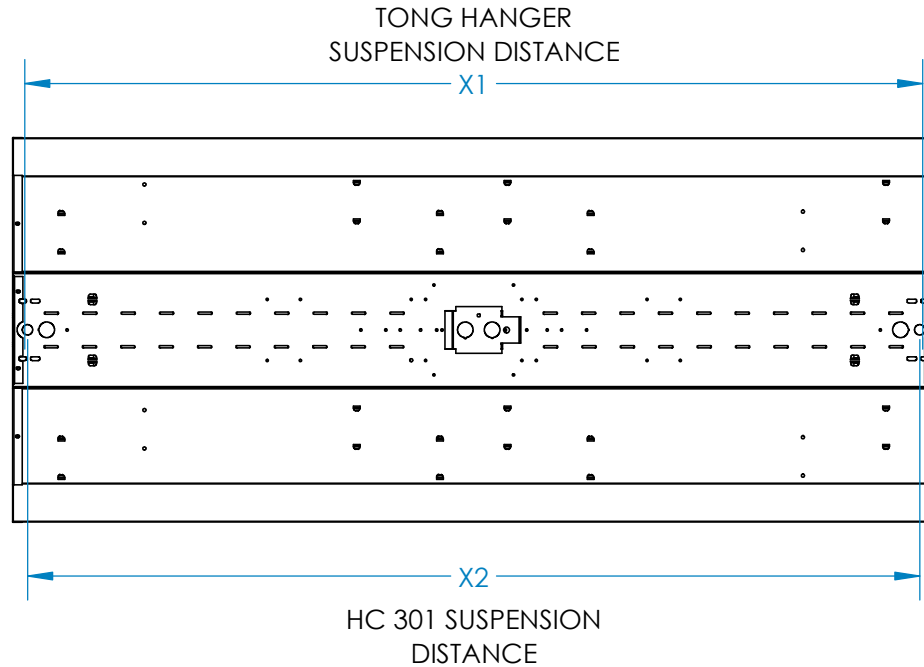

# THL-Pendant Mount Installation Instructions

## Step 3 - Prepare for Mounting



### A. Remove Knockout(s)

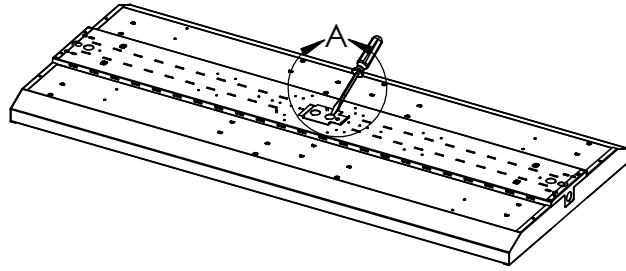

DETAIL A  
SCALE 1 : 5

- Use a flat head screwdriver to gently pry up on the 7/8" knockout and remove it from the access plate located on the back of the fixture.
- If mounting the fixture with HC 301 hanging kits, remove the 1/2" knockouts located at each end of the fixture as well.

### B. Install Hanging Kits

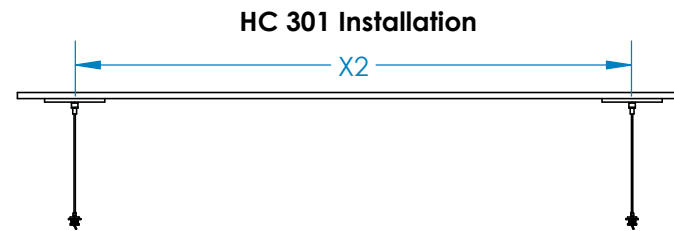
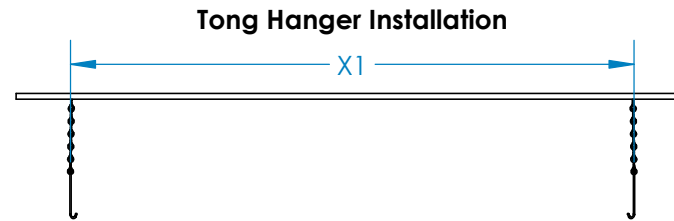


- Install the hanging kits to the ceiling at the desired mounting locations.
- Ensure that hanging kits are properly secured.
- Refer to hanging kit installation guide for more information.

# THL-Pendant Mount Installation Instructions

## Step 4 - Hang and Power the Fixture


### A. Hang the Fixture

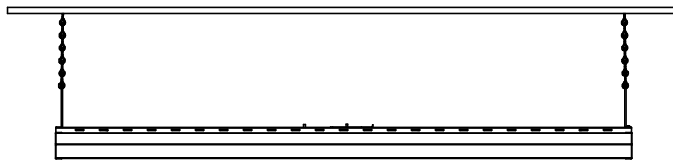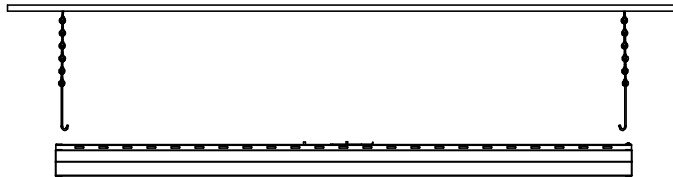

INSTALLED

- Hang the fixture from the installed tong hangers or HC301 cable ends, ensuring the fixtures are properly secured.

### B. Wire the Fixture

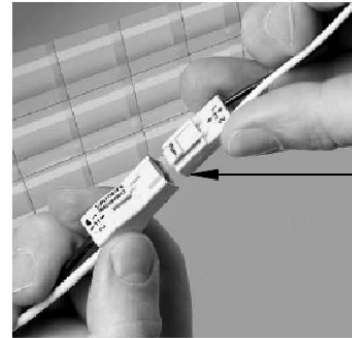

WIRING LEGEND		
BLACK	HOT	Line Voltage
WHITE	NEUTRAL	Line Voltage
GREEN	GROUND	
GRAY	DIMMING	0-10V DC
VIOLET	DIMMING	0-10V DC

- Wire fixtures to the incoming power supply using the provided quick disconnect clip as shown.
- For dimming option, refer to wiring legend above.
- Use UL approved connectors only. Follow all local, state and national codes. Repeat for all remaining fixtures.
- Installation is now complete.