
WARNINGS

- This product must be installed in accordance with all applicable codes by a person familiar with the product.
- Each fixture must be properly supported during install.
- **DO NOT** join fixtures on the floor prior to lifting, or damage will occur.
- **Before beginning installation**, review our complete list of warnings by visiting www.saylite.com/warnings.



Step 1 - Mounting and Suspension

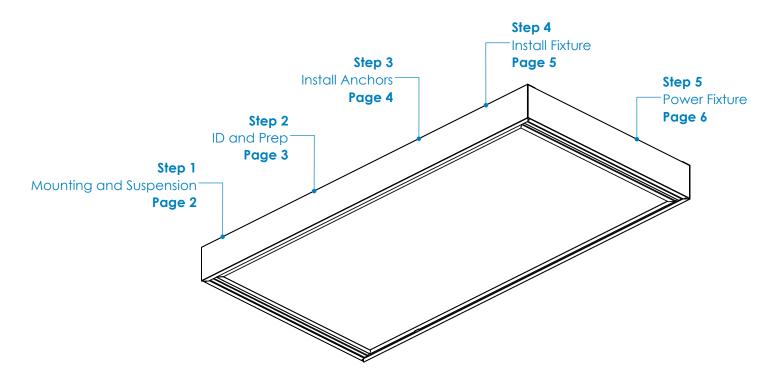

Mounting Options

Drywall or other hard surfaces -Anchored Screws


- Install anchors at mounting locations.
- Ensure anchors are secure.
- Prepare fixture for mounting.

Other hard surfaces include: wood, sheet metal panels, steel beams, concrete or masonry. Use hardware appropriate for each surface and material type.

Suspension Locations

X = Suspension Dimensions

Refer to Assembly Drawings and building plans to determine exact mounting, suspension points, and power feed locations.

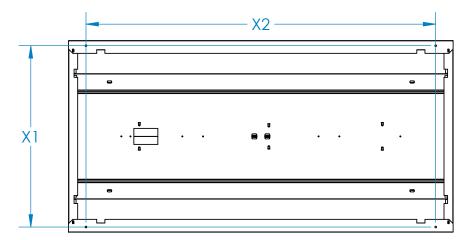


Step 2 - Identification and Preparation



A. Identify Fixtures

SayliteLED Texas Fluorescents Reinvented PART# 131 SHROUD VOLTAGE: 120-277, 50/60HZ WATTAGE: XX MAX FLUX: XXXX LUMENS CCT: XXXX DATE CODE: XX/XX/XX TYPE: XX

B. Tools Needed

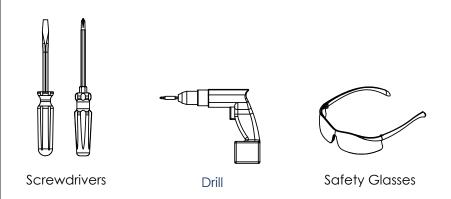

- Use labels found on the box and inside the fixture bodies to identify bodies.
- NOTE: Locations of labels can vary.
- Remove all fixtures from their boxes.
- Organize fixtures based on their labels at the install location.
- Always use proper safety equipment when installing fixtures.
- Tools shown are recommended for standard install. Tools needed may vary based on actual install location conditions.


Kitted Hardware

- Saylite has provided the items listed here, with their Saylite part numbers listed. These items can be found in separate boxes shipped with the fixture.
- Ensure all parts are accounted for and set them aside until needed.
- Any additional hardware needed for this installation will be provided by others.


Step 3 - Install Anchors

Saylite Texas Fluorescents Reinvented

A. Transfer Measurements

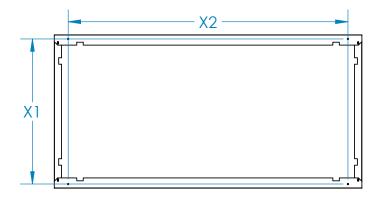

B. Install to Ceiling

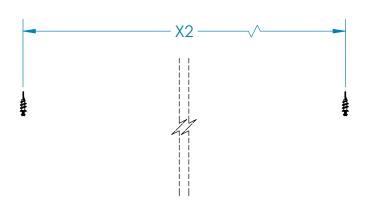

- Measure the distance between mounting holes on fixture.
- Record distances and transfer to mounting surface.

- Install drywall anchor screws (not provided) at measured mounting locations.
- Ensure drywall anchor screws are secure before proceeding.

Step 4 - Install Fixture




A. Install Assembled Frame





B. Insert Fixture and Close Frame

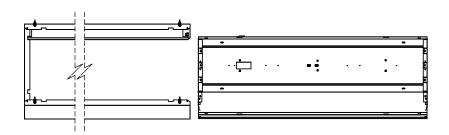


- Install the pre-assembled frame sides to the drywall anchors.
- Tighten down the anchors to secure the frame to mounting surface.
- Slide your 131 fixture into the assembled frame until it stops.
- Next push the final side of the frame into place. The end piece will snap into place.

Step 5 - Power the Fixture

Saylite Texas Fluorescents Reinvented

A. Wire the Fixture



WIRING LEGEND		
BLACK	НОТ	Line Voltage
WHITE	NEUTRAL	Line Voltage
GREEN	GROUND	
GRAY	DIMMING	0-10V DC
VIOLET	DIMMING	0-10V DC

- Wire fixture to the incoming power supply using the provided quick disconnect clip as shown.
- For dimming option, refer to wiring legend above.
- Use UL approved connectors only. Follow all local, state and national codes.
- Fixture installation is now complete.