


C STRIP 8FT Installation Instructions

Overview

WARNINGS

- This product must be installed in accordance with all applicable codes by a person familiar with the product.
- Each fixture must be **properly supported** during install.
- **DO NOT** join fixtures on the floor prior to lifting, or damage will occur.
- **Before beginning installation**, review our complete list of warnings by visiting www.saylite.com/warnings.

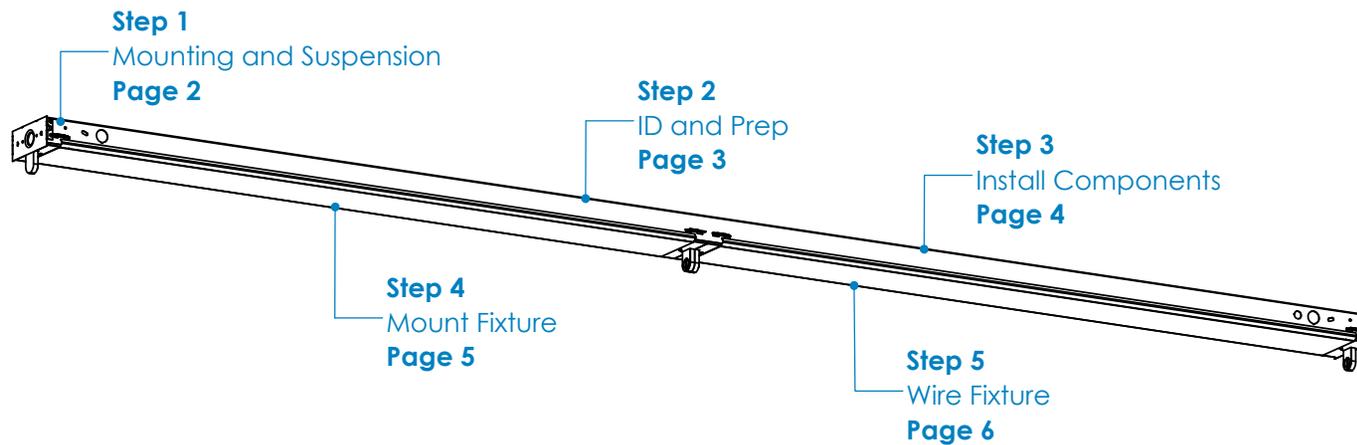

C STRIP 8FT Installation Instructions

Step 1 - Mounting and Suspension

Mounting

Drywall or other hard surfaces - Anchor Screws


- Install anchors at mounting locations.
- Ensure anchors are secure.
- Prepare fixture for mounting.

Other hard surfaces include: wood, sheet metal panels, steel beams, concrete or masonry. Use hardware appropriate for each surface and material type.

Suspension Locations

X = Suspension Dimensions


Refer to Assembly Drawings and building plans to determine exact mounting, suspension points, and power feed locations.

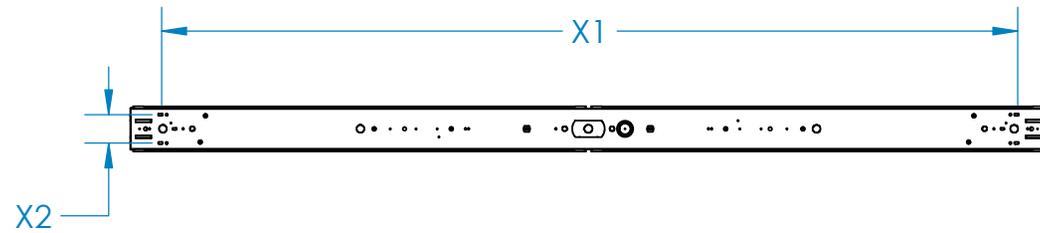

C STRIP 8FT Installation Instructions


Step 2 - Identification and Preparation

A. Identify Fixtures

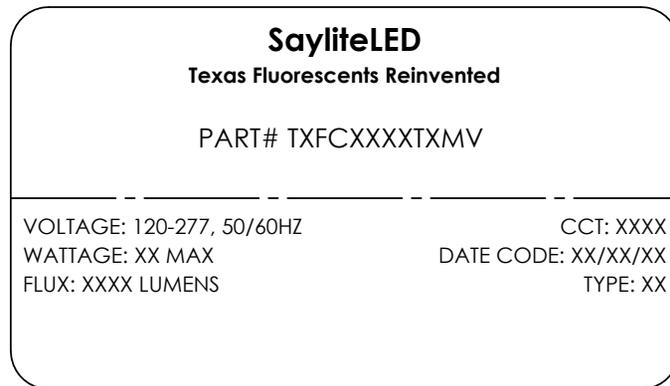

- Use labels found on the box and inside the fixture bodies to identify bodies.
- **NOTE:** Locations of labels can vary.
- Remove all fixtures from their boxes.
- Organize fixtures based on their labels at the install location.

B. Tools Needed

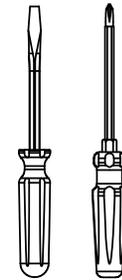


Screwdrivers



Pliers



Safety Glasses



Drill
(optional)

- Always use proper safety equipment when installing fixtures.
- Tools shown are recommended for standard install. Tools needed may vary based on actual install location conditions.


Kitted Hardware

- Saylite has provided the items listed here, with their Saylite part numbers listed. These items can be found in separate boxes shipped with the fixture.
- Ensure all parts are accounted for and set them aside until needed.
- Any additional hardware needed for this installation will be provided by others.

C STRIP 8FT Installation Instructions


Step 3 - Install Components

A. Assemble Socket Bars

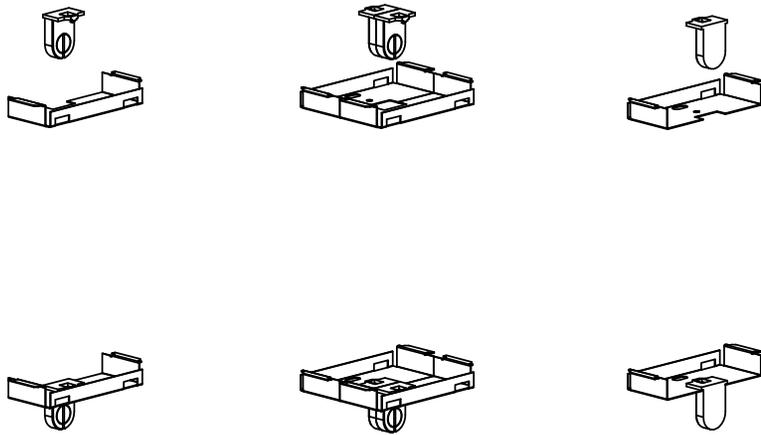

- Install the sockets to the two end and center socket bars, ensuring that the sockets snap into place.

B. Install Socket Bars and End Caps

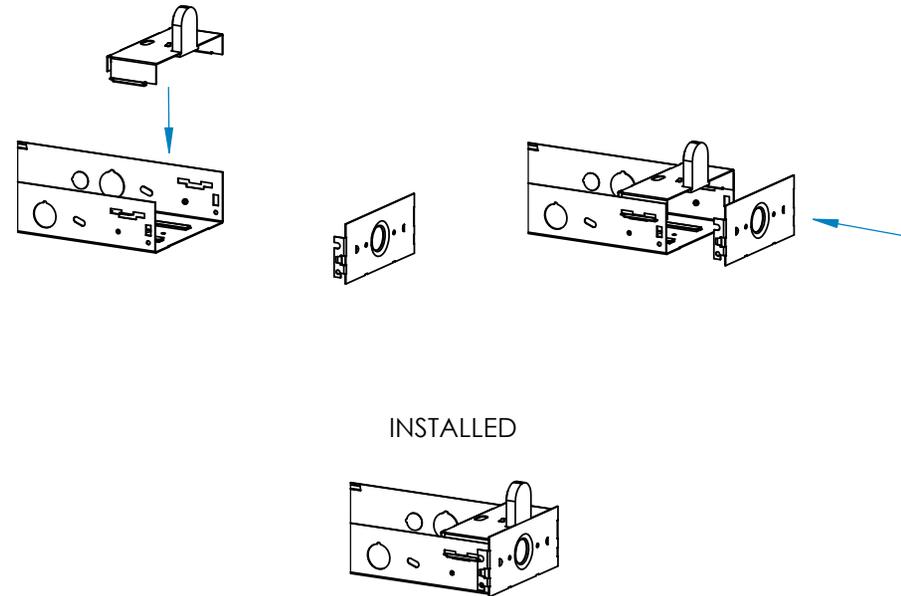

- Snap the center and end socket bars into the fixture housing, ensuring they are secure.
- After securing the socket bars, snap the end caps into place on each end of the fixture.


C STRIP 8FT Installation Instructions

Step 4 - Mount the Fixture




Texas Fluorescents Reinvented

A. Remove Desired Knockouts

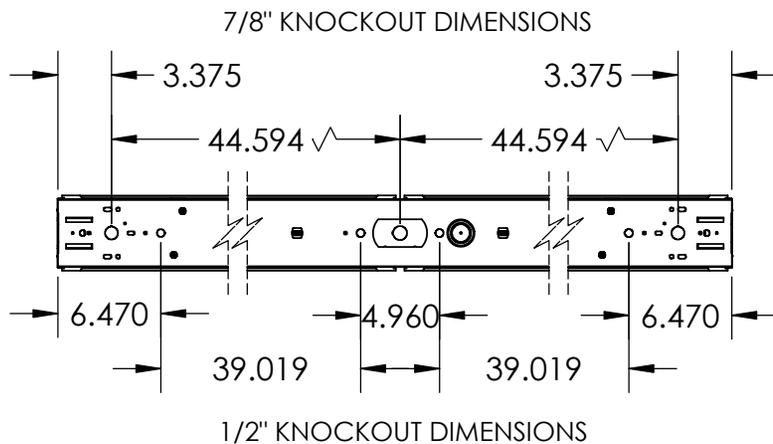

- Prior to mounting the fixture, remove desired knockouts for wiring. Refer to above diagram for knockout locations.
- Drill access holes into mounting surface at knockout locations before mounting fixture.

B. Mount the Fixture

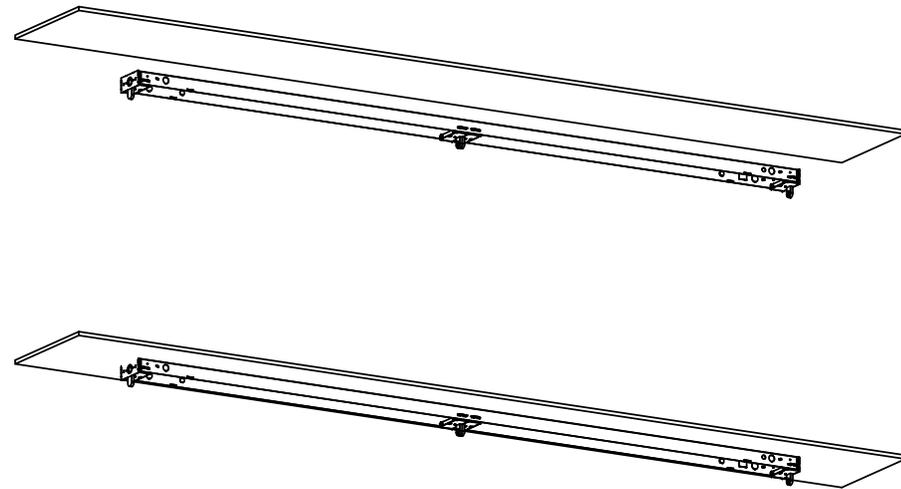

- Install anchoring hardware (not provided) at mounting locations and mount the fixture to the wall or ceiling.
- Pull fixture wiring thru access holes drilled into mounting surface after securing fixture.


C STRIP 8FT Installation Instructions

Step 5 - Wire the Fixture



Texas Fluorescents Reinvented

A. Install Ballast Cover and Bulbs

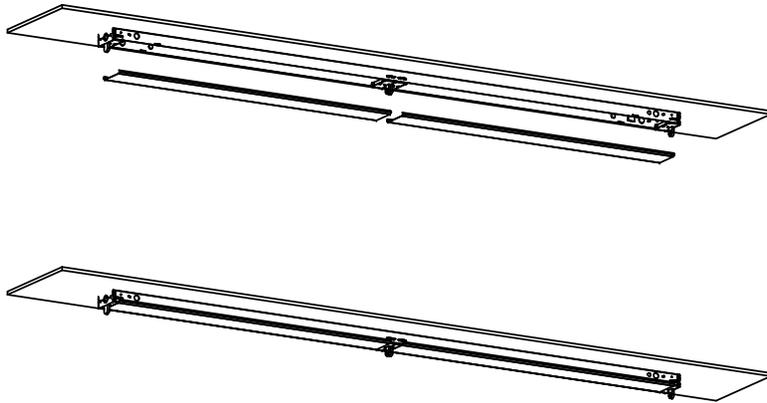

- Install the ballast covers to the fixture pan by either snapping the cover over tabs on the sides of the pan. Ballast covers can also be installed by inserting quarter turns (not provided) into the socket bars.
- Insert the appropriate bulbs into the sockets.

B. Wire Fixture

WIRING LEGEND		
BLACK	HOT	Line Voltage
WHITE	NEUTRAL	Line Voltage

- Wire fixture to the incoming power supply. Connect black fixture wire to black power wire and white fixture wire to white power wire. Wire nuts (not provided) are recommended.
- Use UL approved connectors only. Follow all local, state and national codes.