


# HB131 Installation Instructions

## Overview

### WARNINGS

- This product must be installed in accordance with all applicable codes by a person familiar with the product.
- Each fixture must be **properly supported** during install.
- **DO NOT** join fixtures on the floor prior to lifting, or damage will occur.
- **Before beginning installation**, review our complete list of warnings by visiting [www.saylite.com/warnings](http://www.saylite.com/warnings).

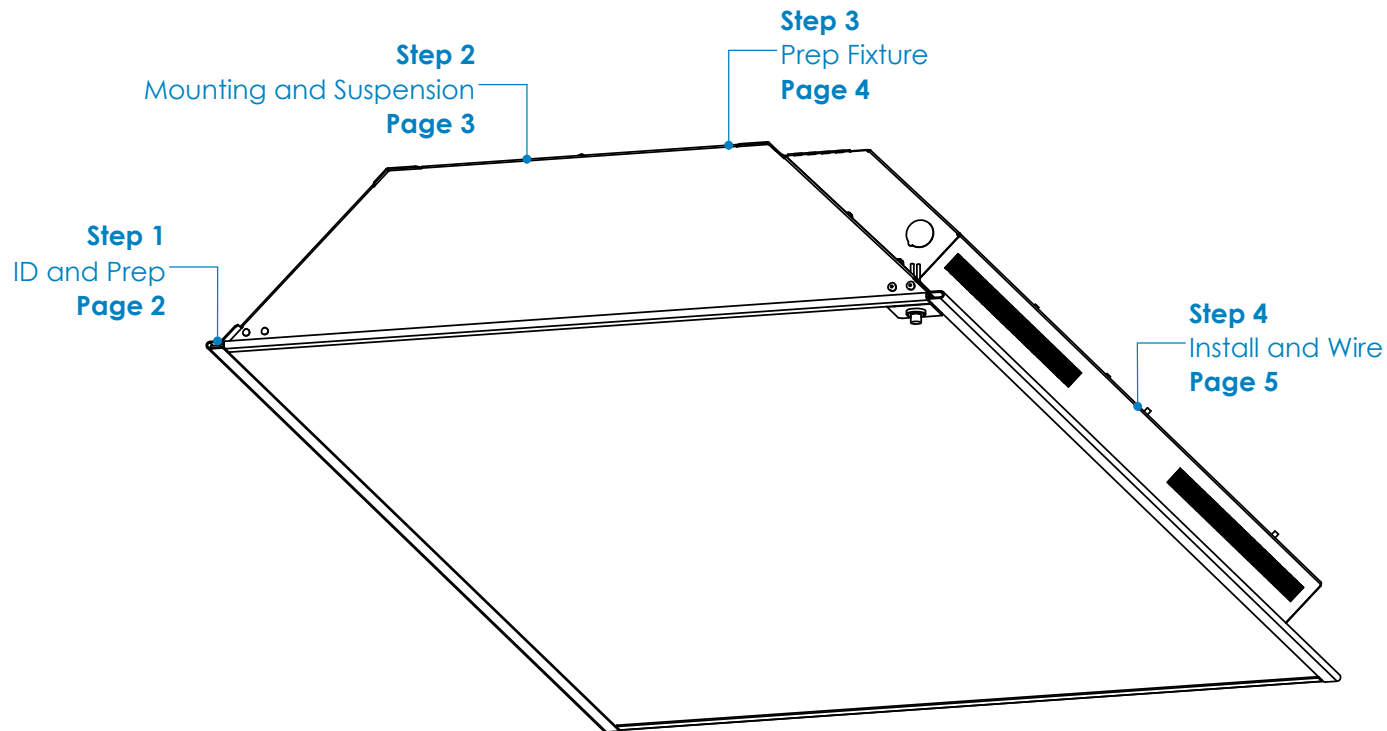


Your particular build may vary.

2020© Saylite | 2055 Luna Road, Suite 142 Carrollton, Texas 75006 | [www.saylite.com](http://www.saylite.com)

# HB131 Installation Instructions

## Step 1 - Identification and Preparation

### A. Identify Fixtures

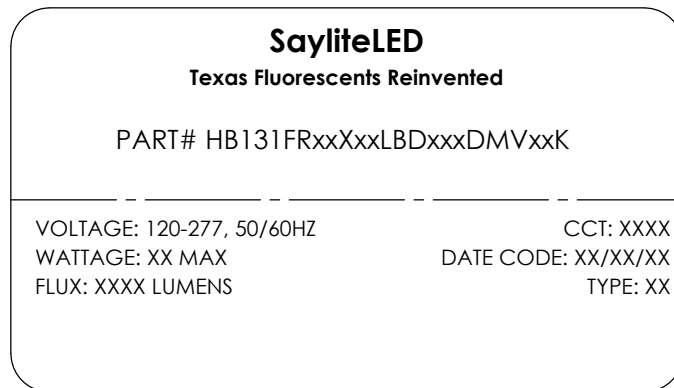

- Use labels found on the box and inside the fixture bodies to identify bodies.
- **NOTE:** Locations of labels can vary.
- Remove all fixtures from their boxes.
- Organize fixtures based on their labels at the install location.


### B. Tools Needed



Flat Head  
Screwdriver



Utility Knife



Safety Glasses

- Always use proper safety equipment when installing fixtures.
- Tools shown are recommended for standard install. Tools needed may vary based on actual install location conditions.


### Kitted Hardware

- Saylite has provided the items listed here, with their Saylite part numbers listed. These items can be found in separate boxes shipped with the fixture.
- Ensure all parts are accounted for and set them aside until needed.
- Any additional hardware needed for this installation will be provided by others.

# HB131 Installation Instructions


## Step 2 - Mounting and Suspension

### A. Transfer Fixture Measurements\*

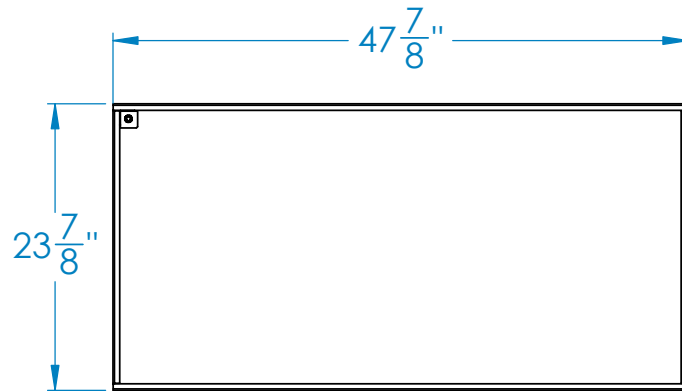

- Note the length and width of the fixture, including the pre-installed flanges.
- Transfer the dimensions to the hanging grid and set the grid rails to the proper width.

### B. Cut Ceiling Panels

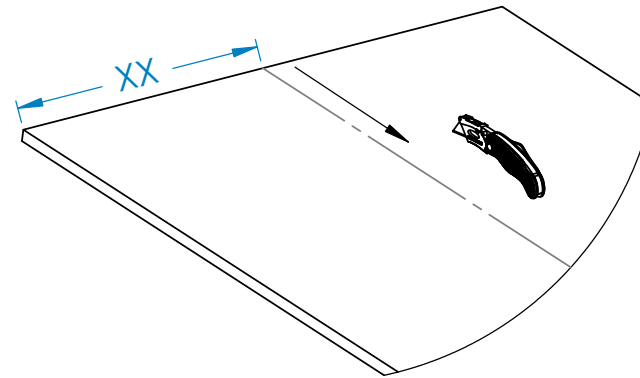



- Optional: Cut ceiling tiles to fit custom fixture spaced grids.

**\*NOTE:** Length and width dimensions will vary according to specific fixture model being installed. Measure each fixture to be installed to ensure the grid spacing is correct.

# HB131 Installation Instructions

## Step 3 - Prepare the Fixture



### A. Remove 7/8" Knockout

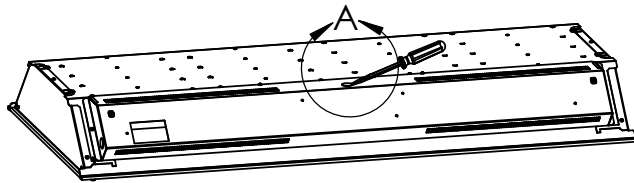

DETAIL A  
SCALE 1 : 5

- Using a flat head screwdriver, gently pry upwards to remove the knockouts from the driver cover box.

### B. Expose Fixture Wiring

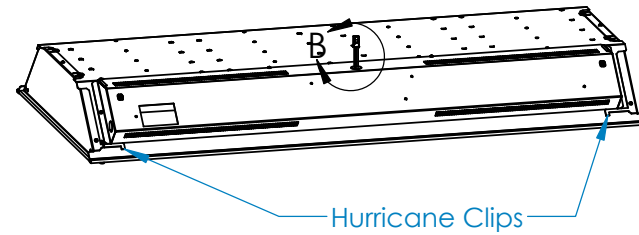

DETAIL B  
SCALE 1 : 5

- Gently pull the wiring for the quick disconnect out of the driver cover box.
- Open the hurricane clips on each corner of the fixture to 90°.



# HB131 Installation Instructions

## Step 4 - Install the Fixture



Texas Fluorescents Reinvented


### A. Install Fixture to Grid

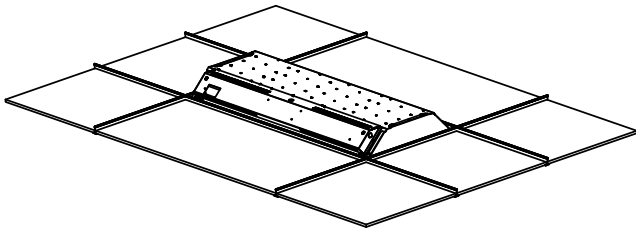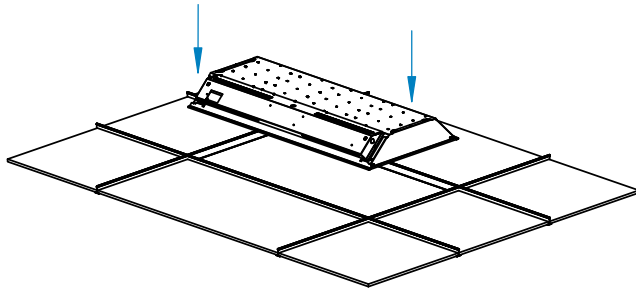

INSTALLED

- Install the fixture onto the grid, ensuring the fixture is properly oriented and the grid positioned correctly to support the fixture.
- Hurricane clips must be over grid bars.

### B. Connect Fixture Wiring

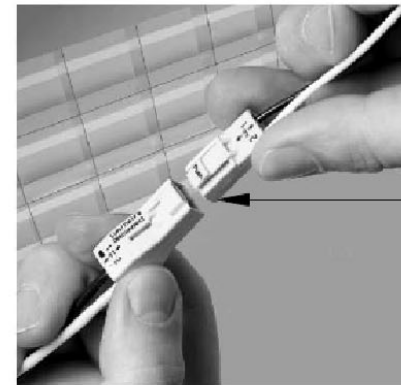

WIRING LEGEND		
BLACK	HOT	Line Voltage
WHITE	NEUTRAL	Line Voltage
GREEN	GROUND	
GRAY	DIMMING	0-10V DC
VIOLET	DIMMING	0-10V DC

- Wire the fixture to the incoming power supply using the provided quick disconnect clip as shown.
- For dimming option, refer to wiring legend above.
- Use UL approved connectors only. Follow all local, state and national codes.