


# L23-Wall CR Installation Instructions

## Overview

### WARNINGS

- This product must be installed in accordance with all applicable codes by a person familiar with the product.
- Each fixture must be **properly supported** during install.
- **DO NOT** join fixtures on the floor prior to lifting, or damage will occur.
- **Before beginning installation**, review our complete list of warnings by visiting [www.saylite.com/warnings](http://www.saylite.com/warnings).

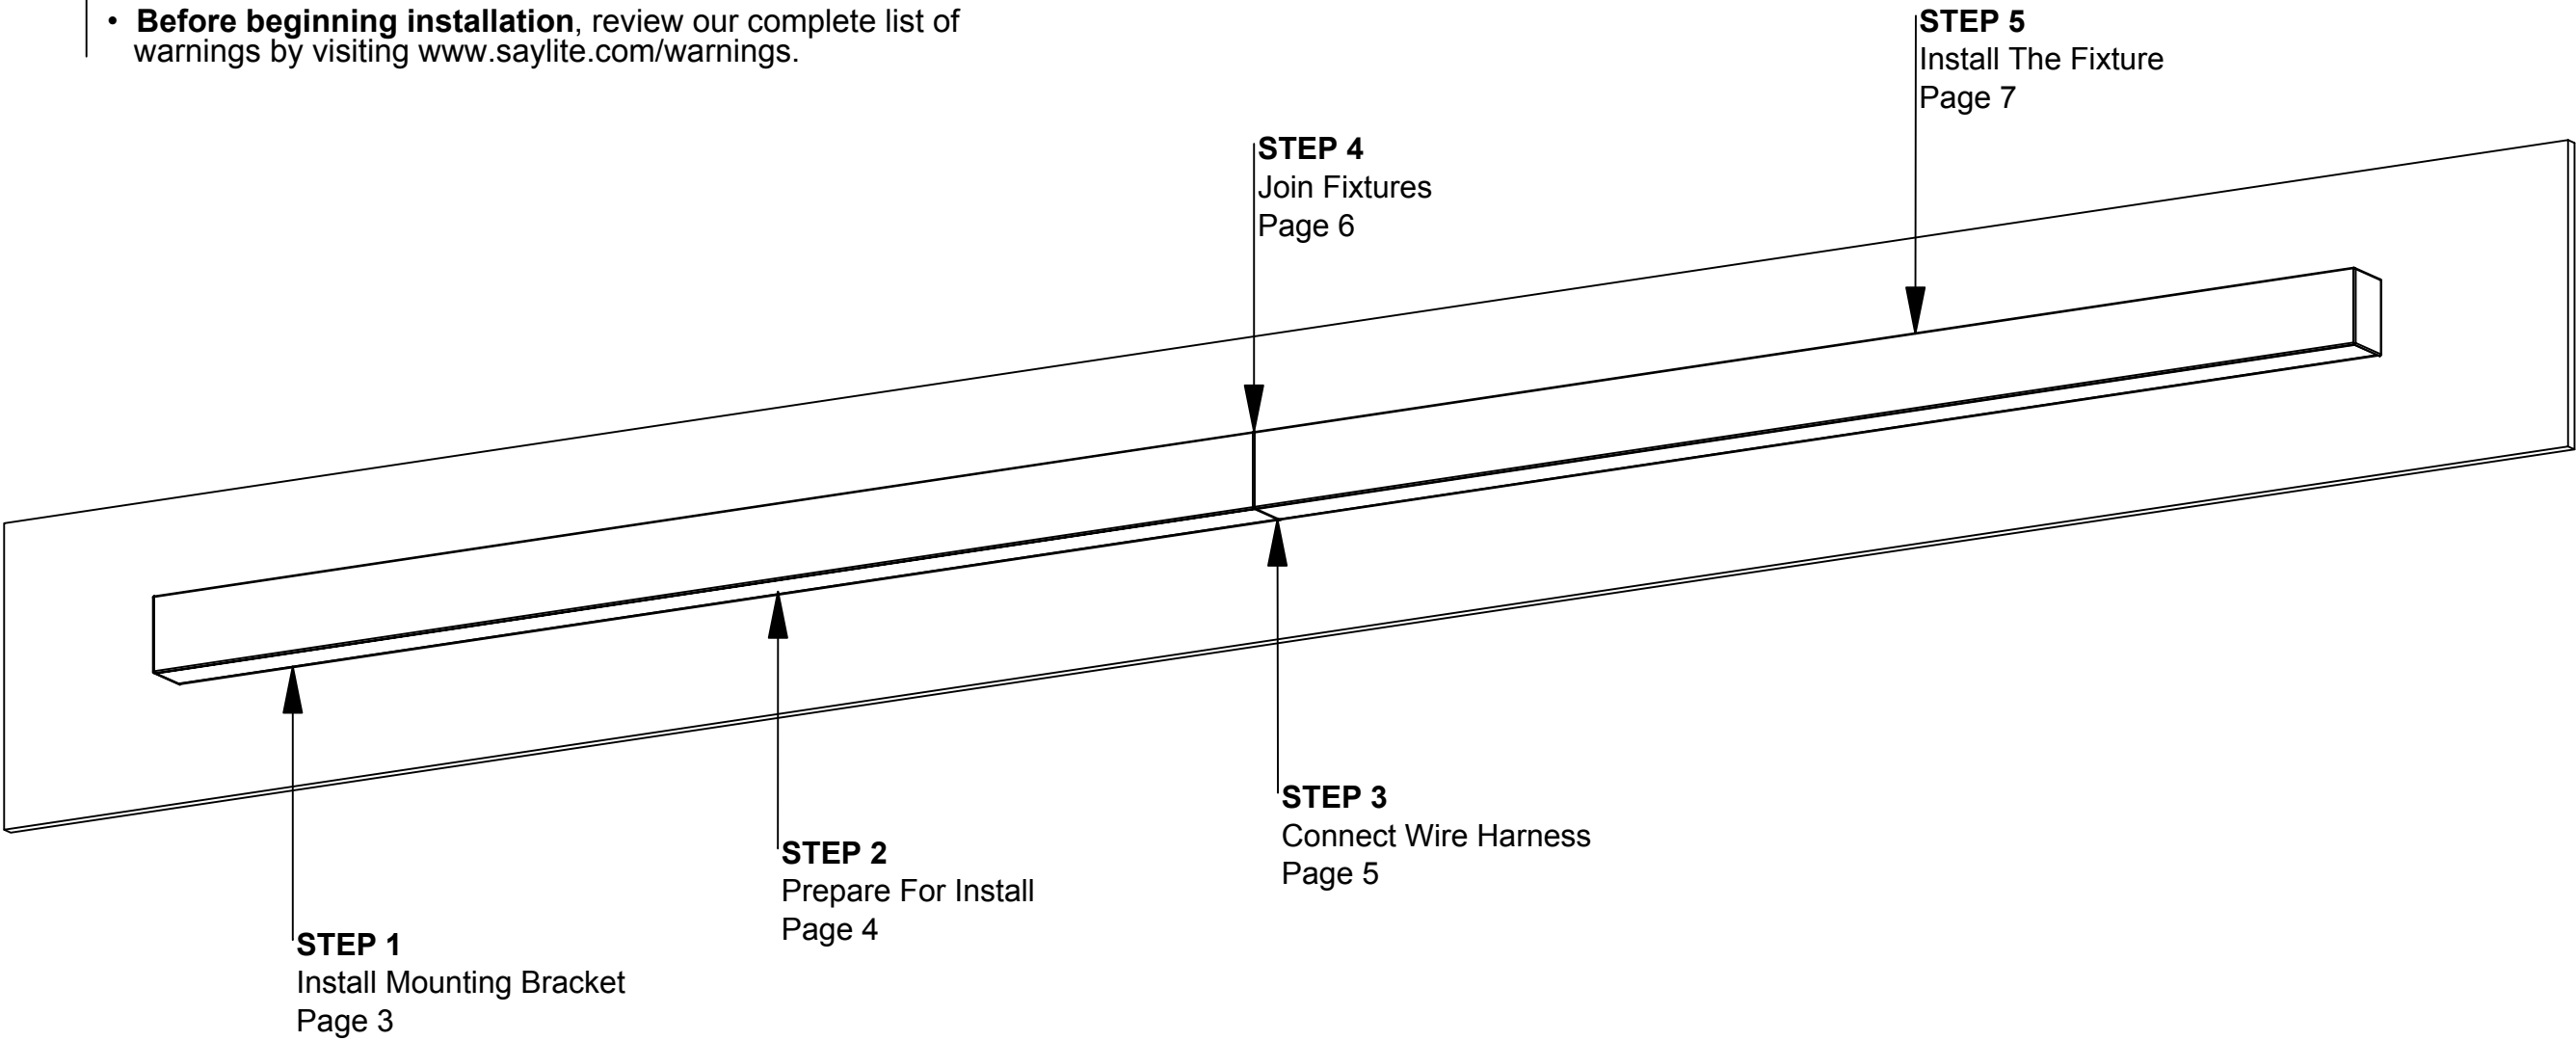

We believe  
in the power  
of light.



Your particular build may vary.

2018© Saylite | 2055 Luna Road, Suite 142 Carrollton, Texas 75006 | [www.saylite.com](http://www.saylite.com)

1 of 7

Form BWE - L23-Wall CR V2 10/18

# L23-WALL CR Installation Instructions


## Preparation - Tools/Parts Identification

### A. Identify Fixtures



- Use labels found on the box and inside fixture bodies to identify bodies.
- **NOTE:** Locations of labels can vary.
- Remove all fixtures from their boxes.
- Organize fixtures based on their labels at the install location.


### B. Tools Needed

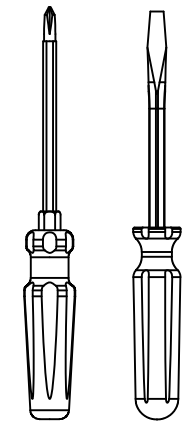


Screwdrivers



3/4" Drill Bit

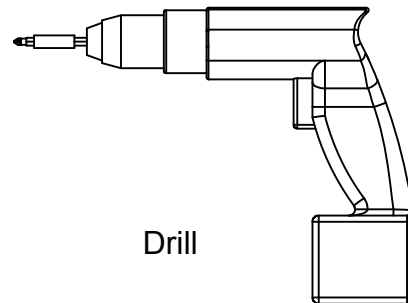

Drill

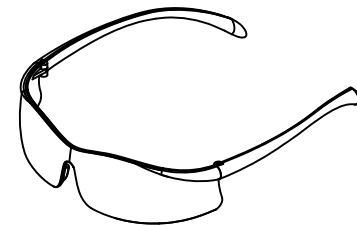

Safety Glasses

- Always use proper safety equipment when installing fixtures.
- Tools shown are recommended for standard install. Tools needed may vary based on actual install location conditions.


### C. Identify Parts




Wall Mount Bracket  
PN: L23\_WM\_BASE\_XXIN  
(Provided)



Mounting Screw W/ Anchor  
(By Others)



#8-32 X 1/2" Machine Screw  
(Provided)

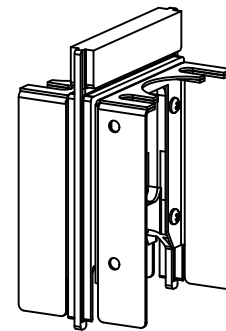

Continuous Run Bracket  
(Provided)

- Read entire install instructions before beginning installation.
- Unpack all components and arrange in order of install steps.
- For help with installation, please contact us at [www.saylite.com](http://www.saylite.com) or call us at (972) 247-3171.


# L23-Wall CR Installation Instructions

## Step 1 - Install Mounting Bracket




Texas Fluorescents Reinvented

### A. Transfer Measurements

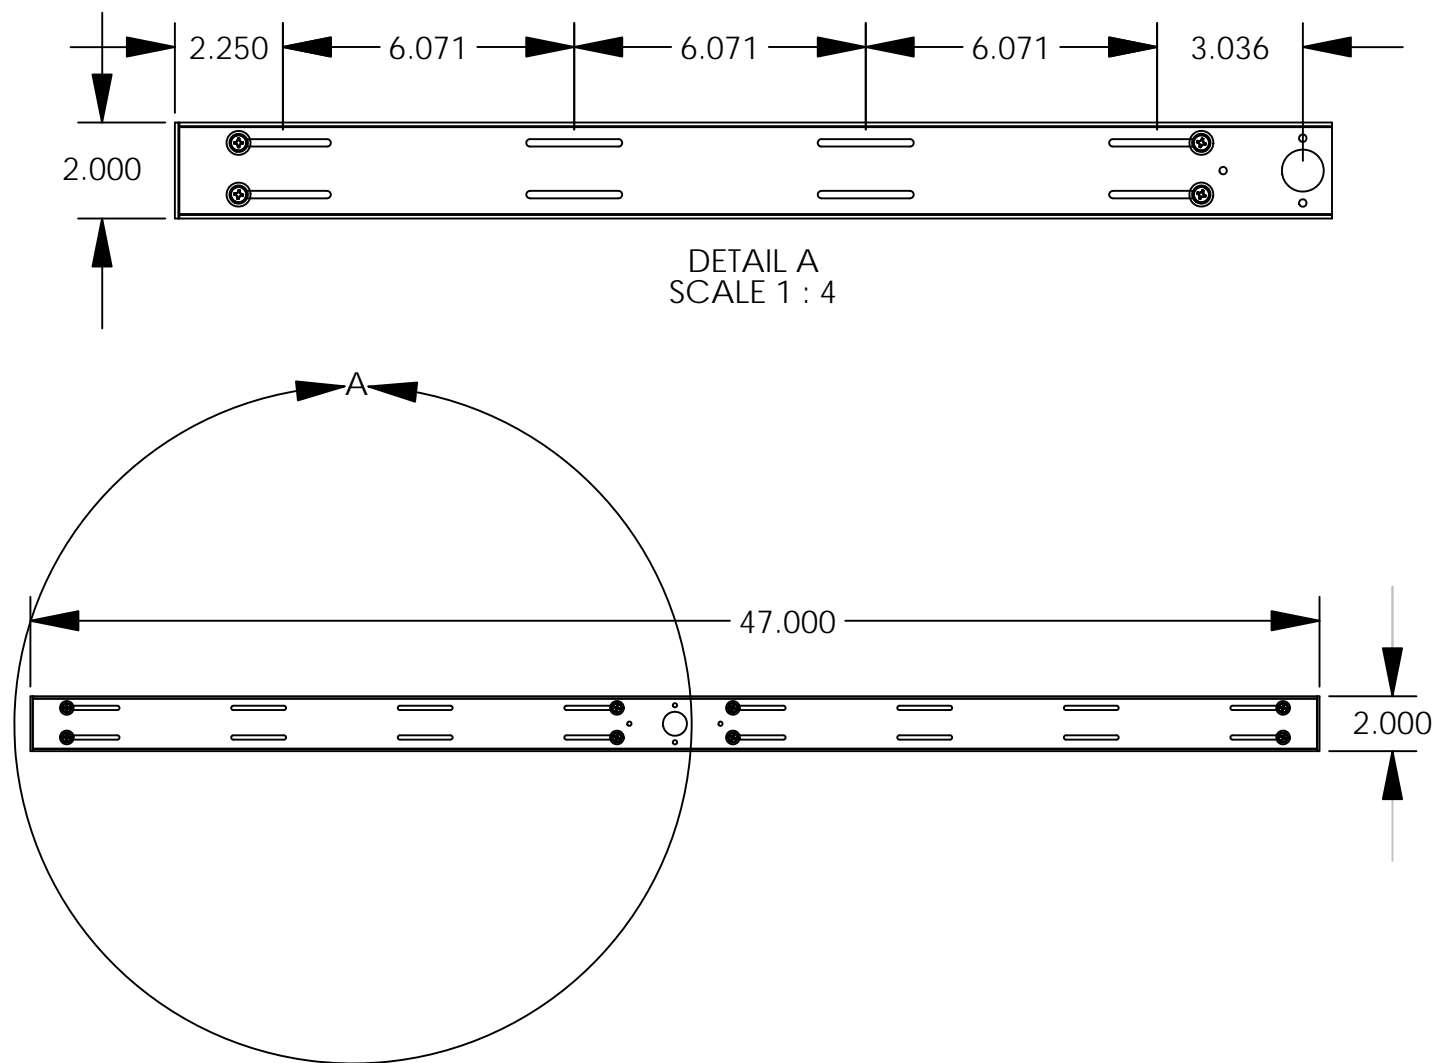


- Transfer the dimensions of the mounting keyways above to the mounting surface.
- **Note:** The dimensions are mirrored on both sides of the mounting bracket.

### B. Install Mounting Bracket

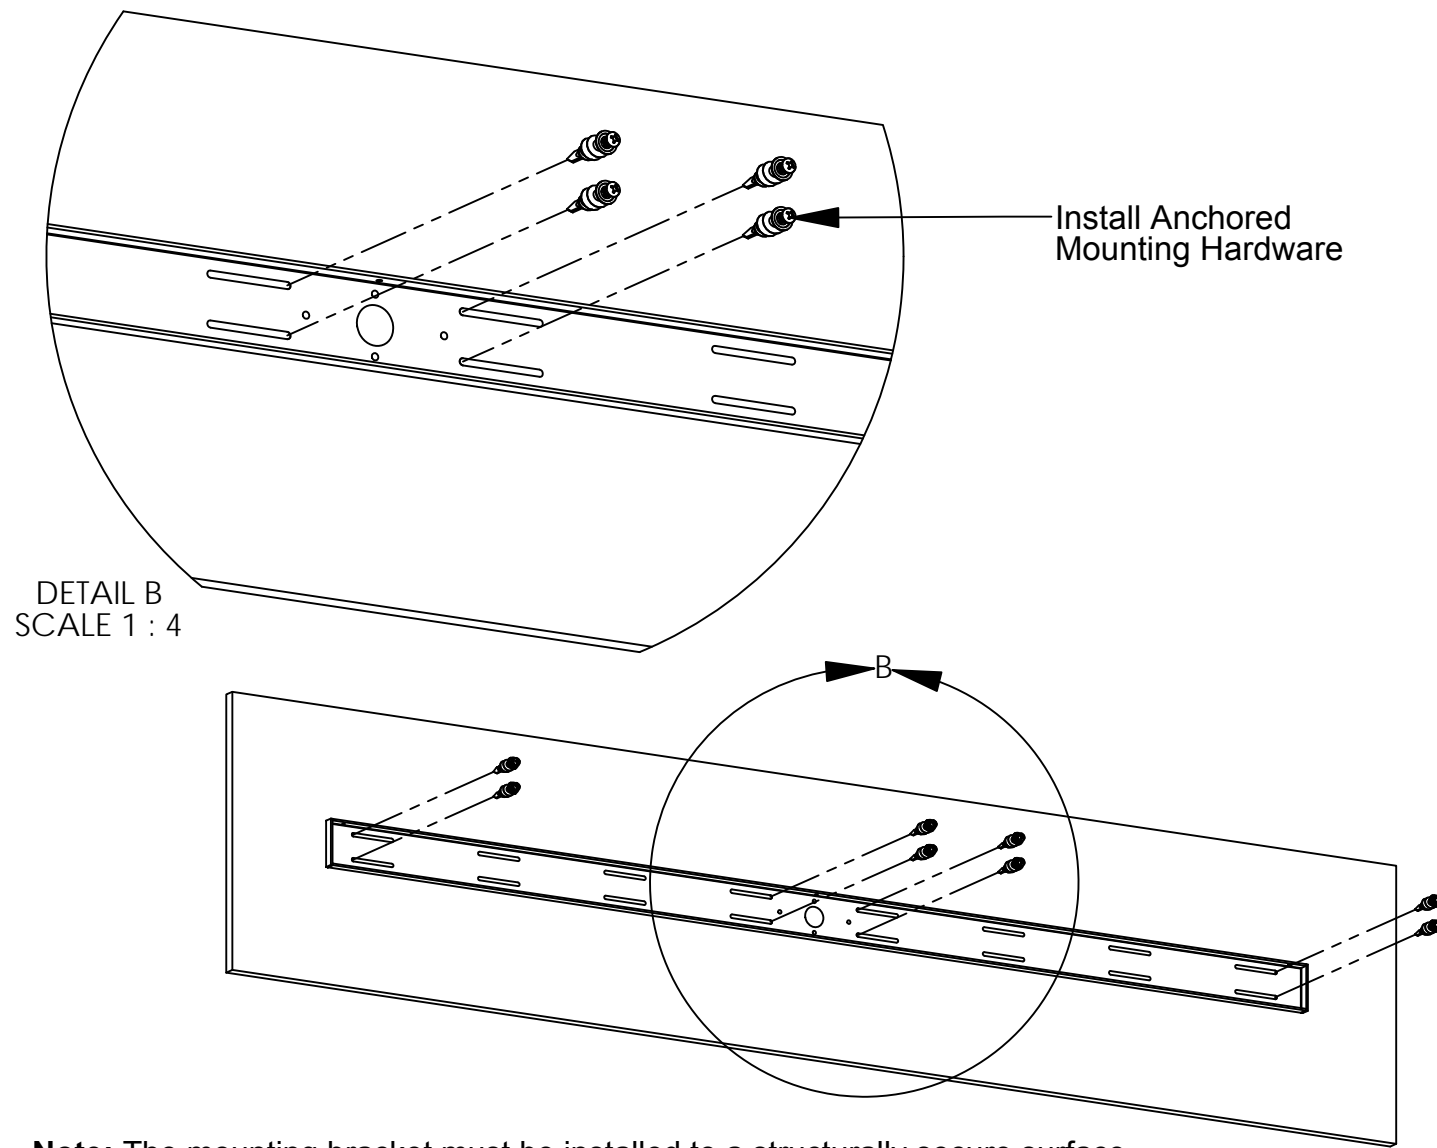


- **Note:** The mounting bracket must be installed to a structurally secure surface.
- **Note:** Additional bracing may be needed before mounting bracket.
- **Note:** Confirm no obstructions behind the wall before mounting.
- Secure the mounting bracket to the mounting surface as shown using anchored hardware.


### Items Used In This Step



Wall Mount Bracket  
(Provided)

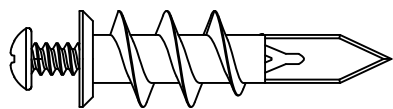

Mounting Screw W/ Anchor  
(By Others)



Drill


# L23-Wall CR Installation Instructions

## Step 2 - Prepare For Install




Texas Fluorescents Reinvented

### A. Drill Hole For Wiring

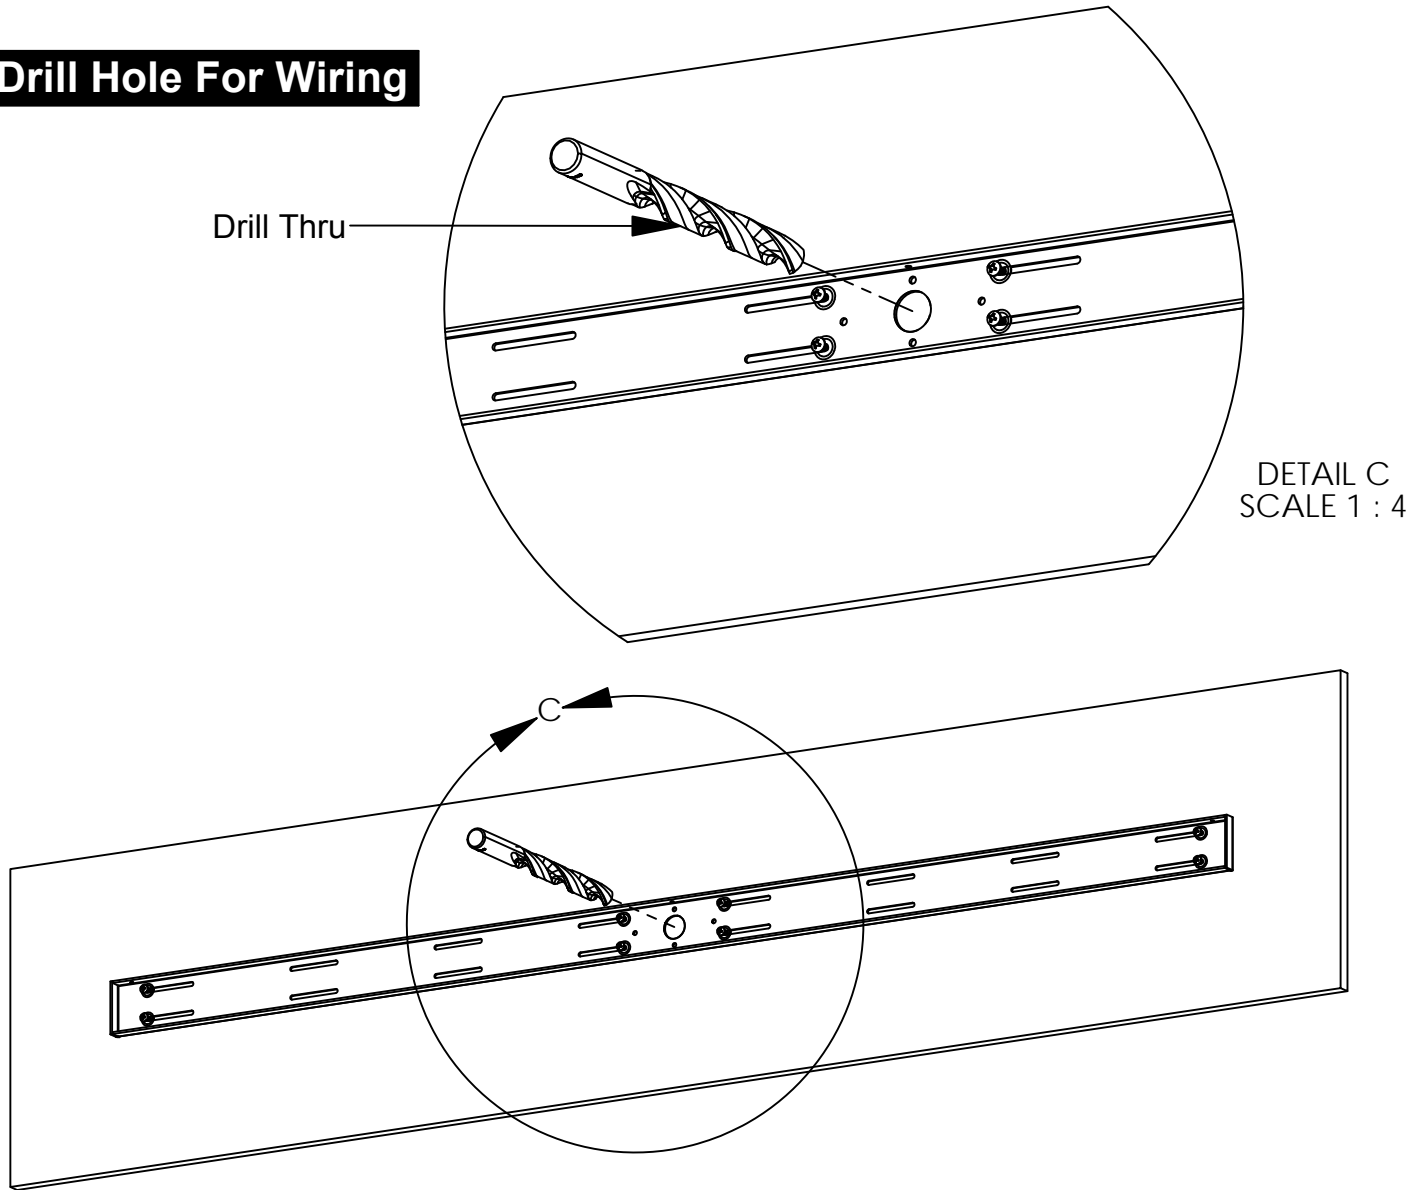

- Using a 3/4" bit, drill a hole to allow supply wiring to pass thru.
- **Note:** Use caution when drilling as to not damage components inside of wall.

### B. Remove Lenses

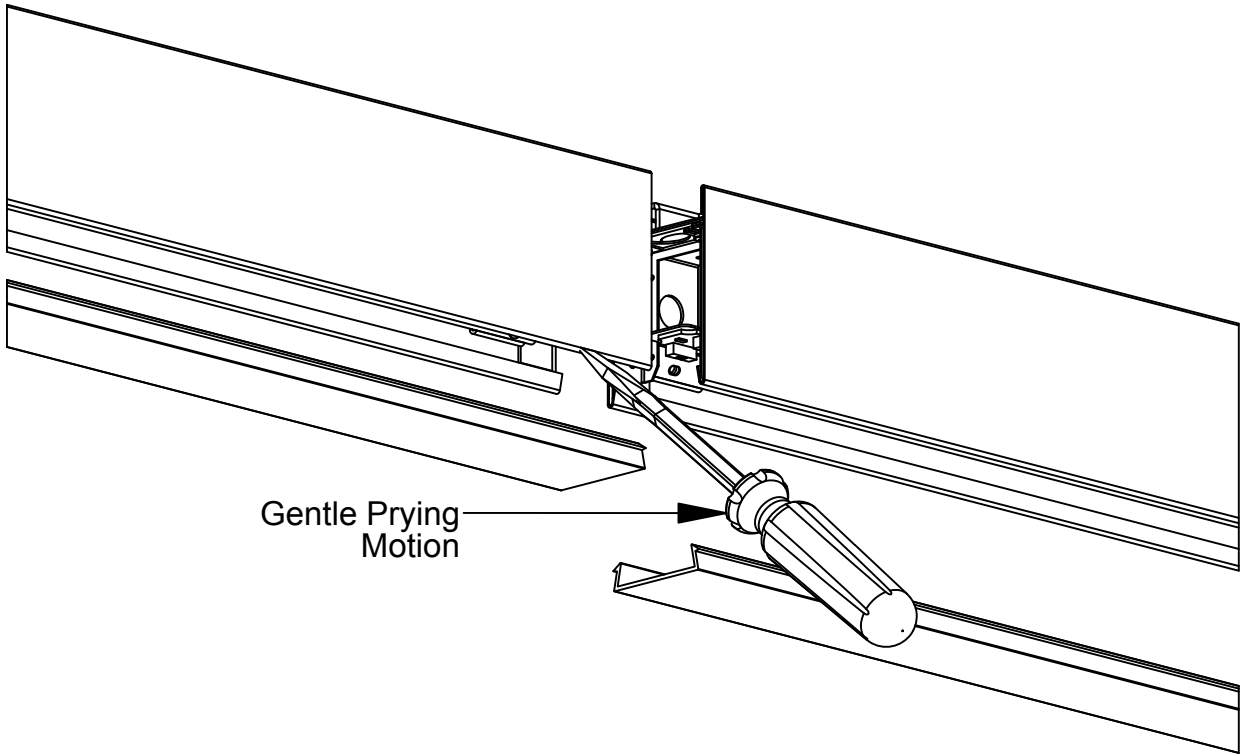


- Carefully insert a flat-head screwdriver, and use a gentle prying motion to remove lenses.
- Repeat steps for all fixtures in the run. Set lenses aside in a safe, out of the way place.


### Items Used In This Step



3/4" Drill Bit

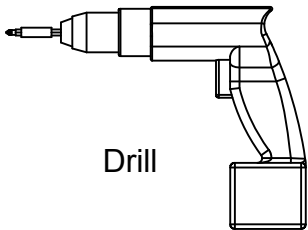

Drill




Flat Tip Screwdriver

# L23-Wall CR Installation Instructions

## Step 3 - Connect Wire Harness

### Plug In Wire Harness

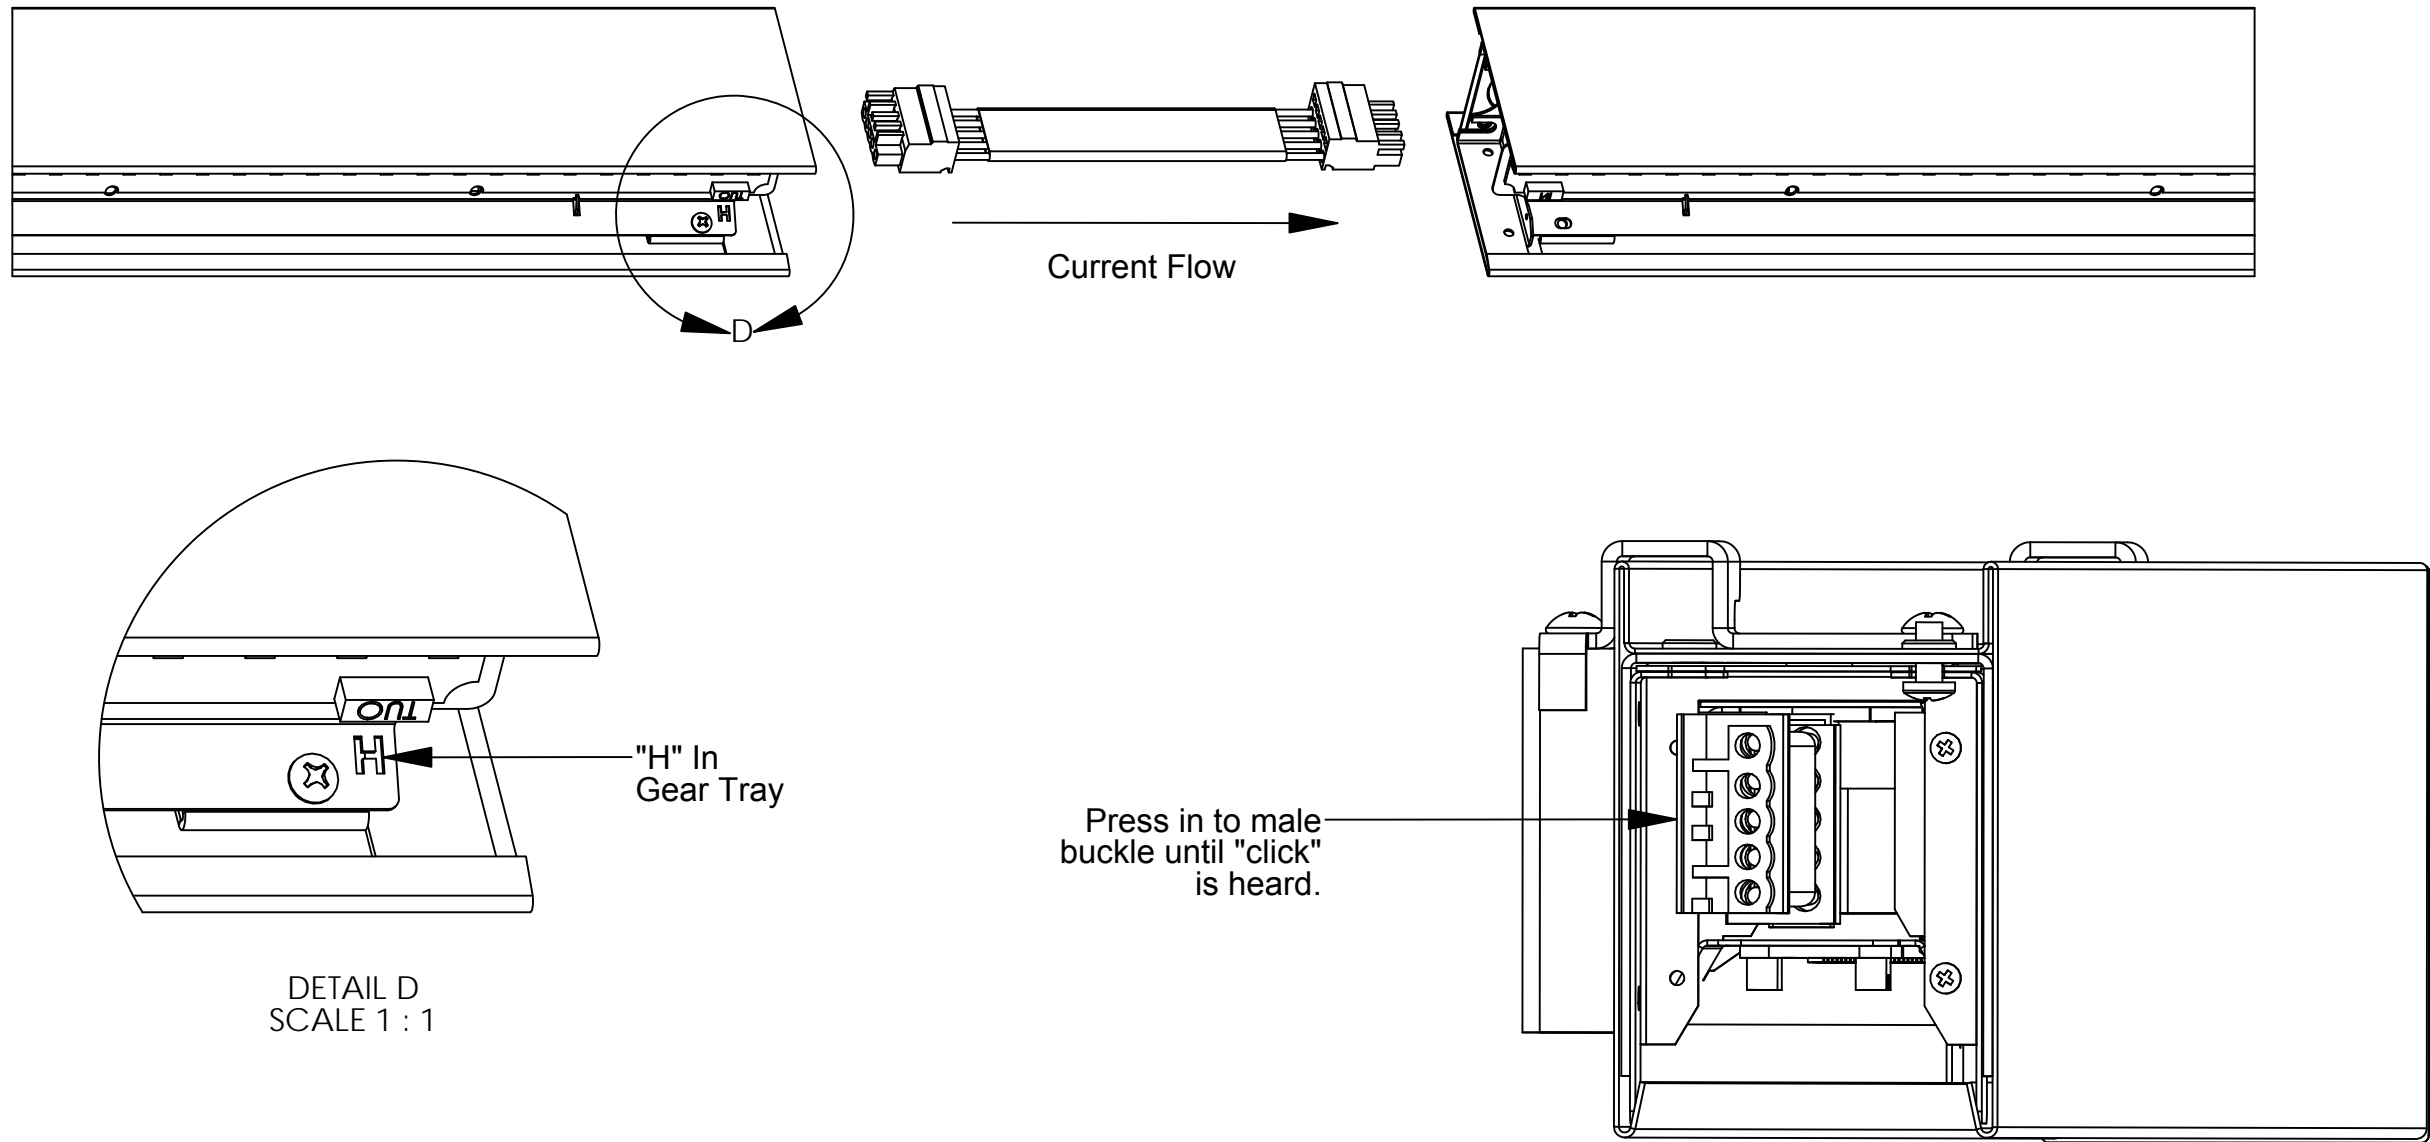

- Make sure fixtures are orientated so that ends with "H" in gear tray are secured to end without "H".
- Install provided female wiring harness between fixtures set in continuous run.
- Clip the female harness in to the male harness of each fixture to be joined. Listen for audible "click".

### Items Used In This Step




Wiring Harness  
(Provided)

# L23-Wall CR Installation Instructions


## Step 4 - Join Fixtures

### A. Install Continuous Run Bracket

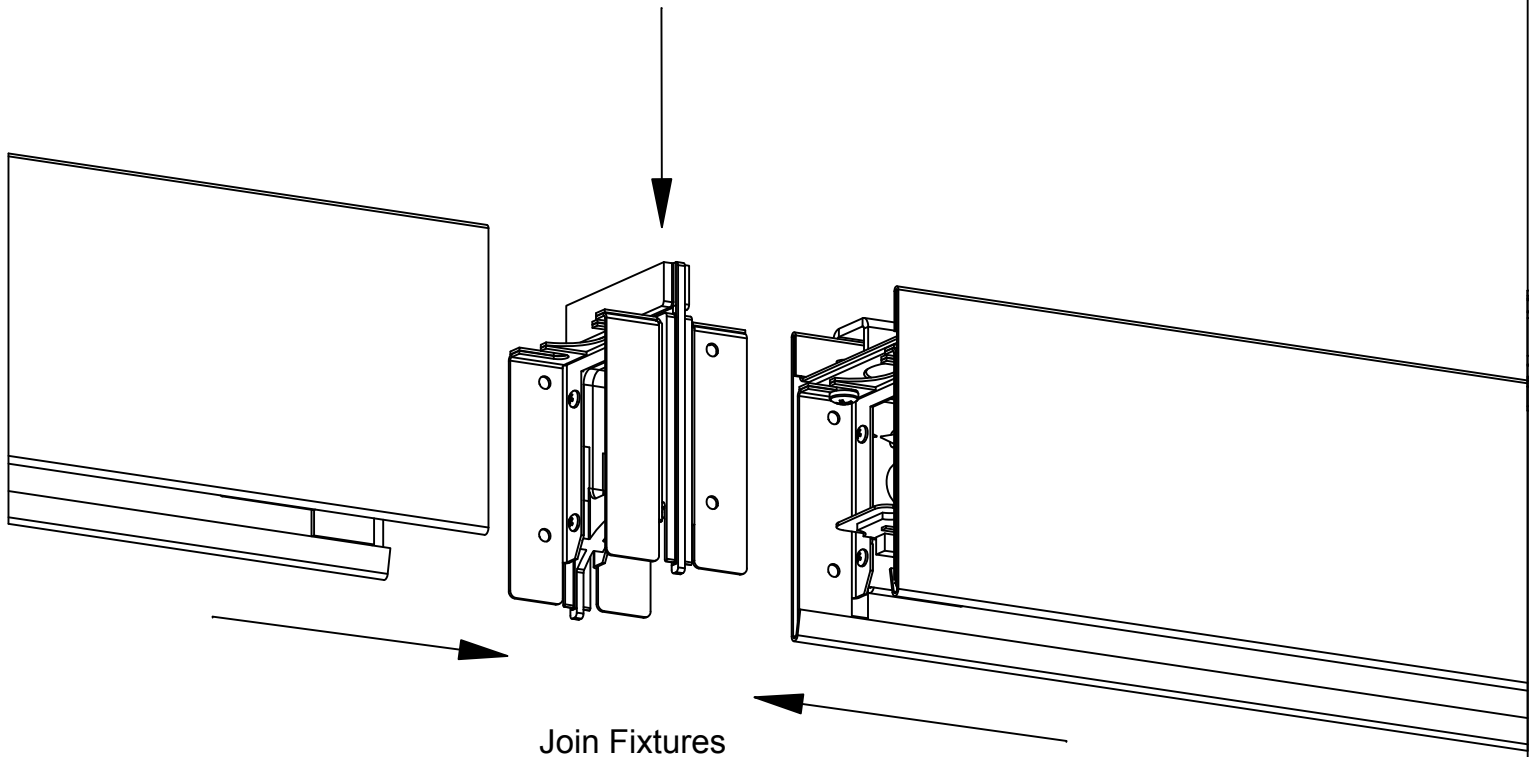


- Line up and install the continuous run bracket as shown above.
- Press the bracket firmly up against one fixture

### B. Tighten Install Screws

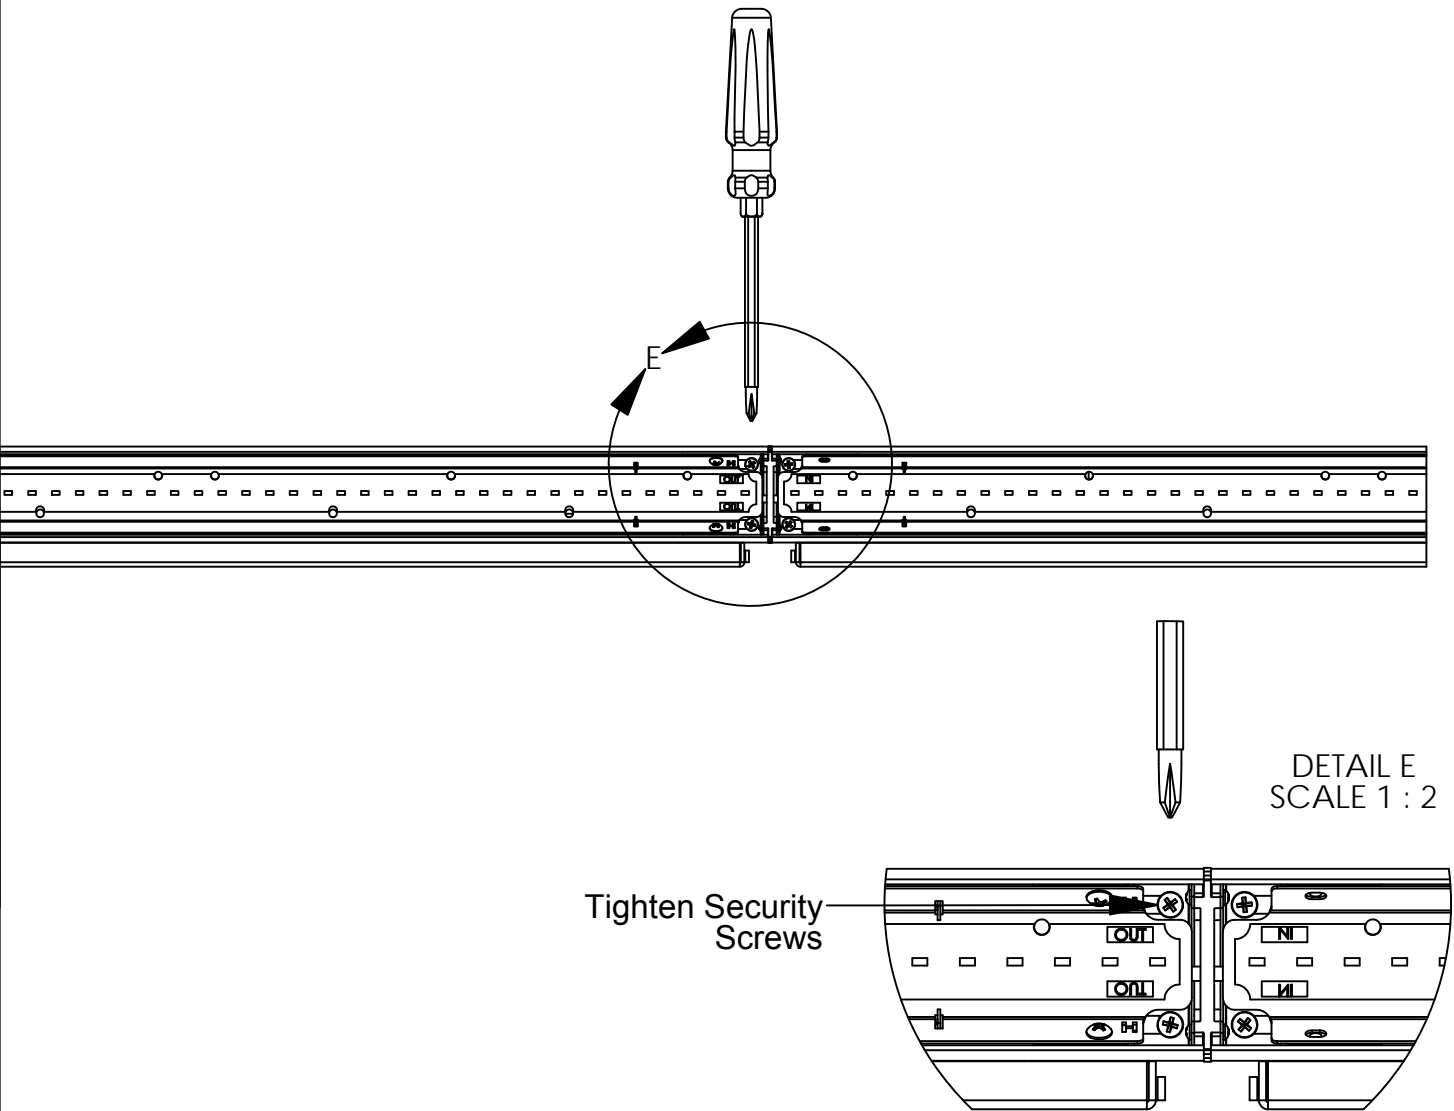


- Secure the bracket to the fixture by tightening the pre-installed screws using a phillips screwdriver.
- Press the adjacent fixture up against the run by repeating the previous steps. Tighten the screws.
- After joining and securing all fixtures in the run, re-install all removed lenses.

### Items Used In This Step



Phillips Screwdriver



Continuous Run Bracket  
(Provided)


# L23-Wall CR Installation Instructions

## Step 5 - Install The Fixture




Texas Fluorescents Reinvented

### A. Drill Hole For Wiring

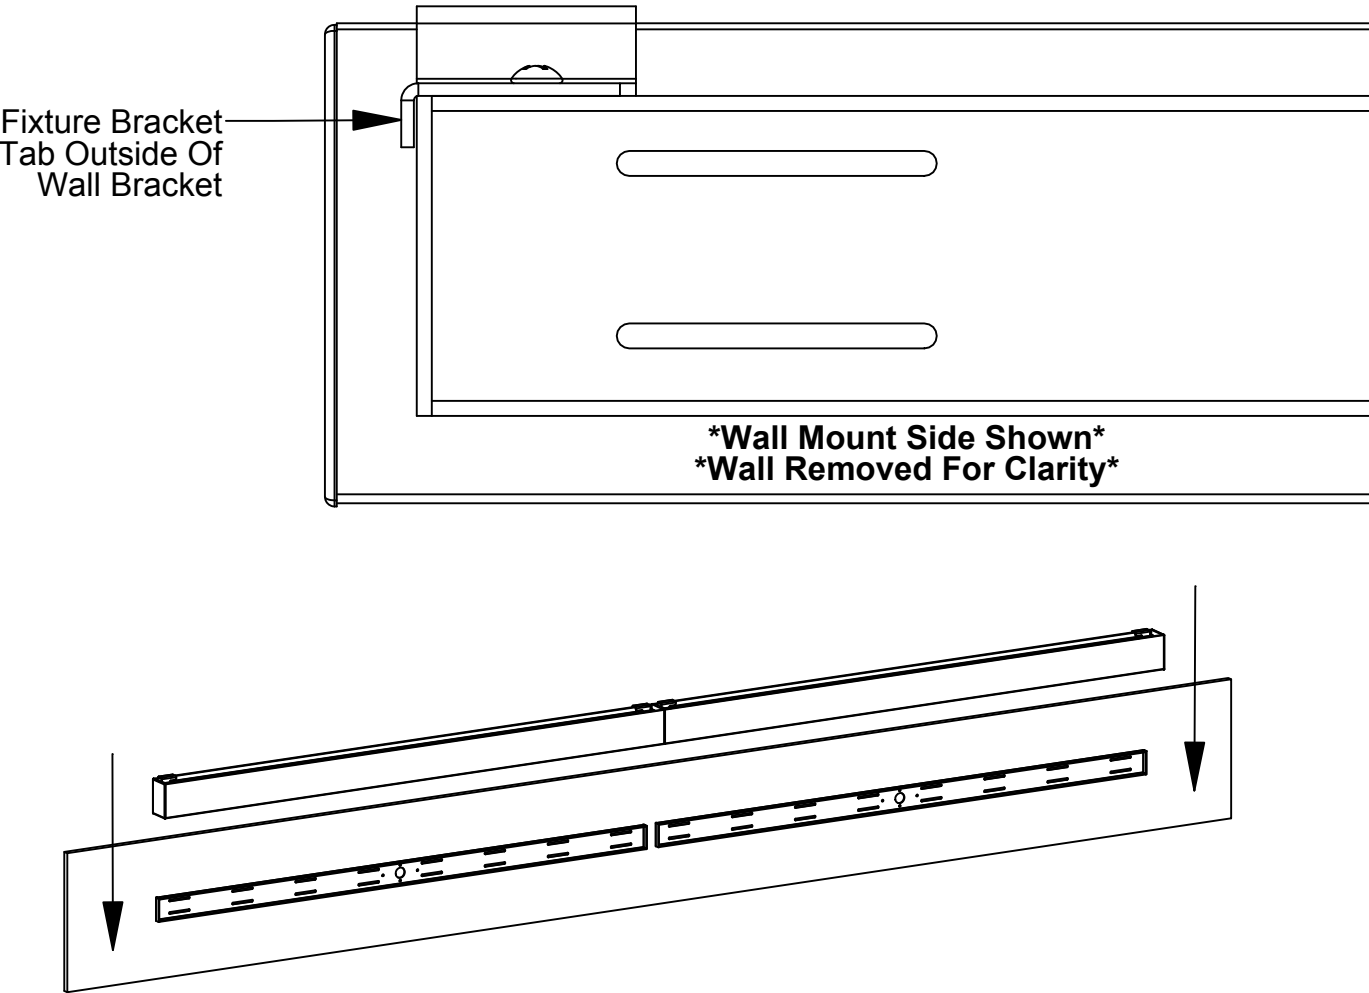


- Slide the fixture down over the installed wall bracket as shown.
- The tabs on the pre-installed fixture brackets fit outside of the wall bracket as noted.
- **Note:** Slight adjustment of the fixture bracket tabs may be needed to achieve proper fit.

### B. Mount The Fixture

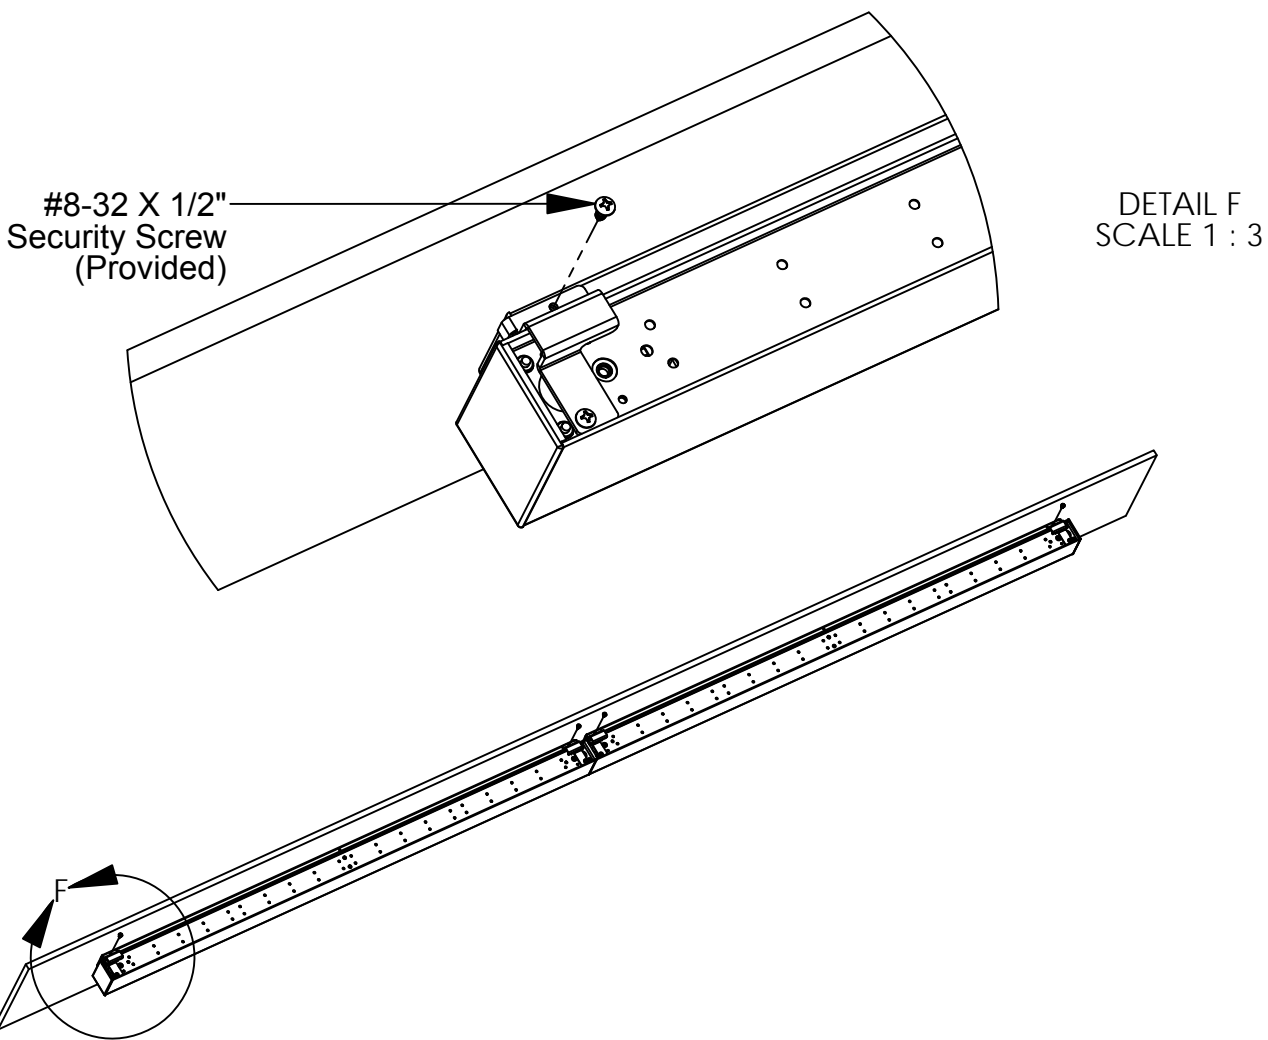


- Secure the fixture to the bracket using #8-32 x 1/2" screws provided.
- Install all security screws provided as shown.
- Install is now complete.

### Items Used In This Step



Screwdriver



#8-32 X 1/2" Machine Screw  
(Provided)