


Installation instruction:




Recessed accessories

- ① Driver box
- ② 8FT Shell
- ③ Perforated flanged for 8FT /6pcs
- ④ Adjustment hole of installation height
- ⑤ 8FT fixture
- ⑥ Power input and the connection port
- ⑦ Magnet for install

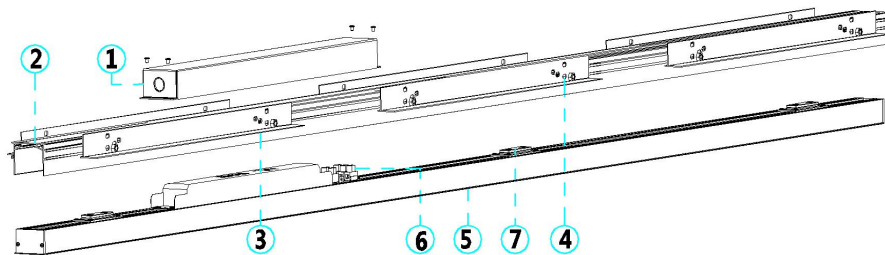


Installation step:


(1) Drill installation holes and wiring hole as per scale by "L".

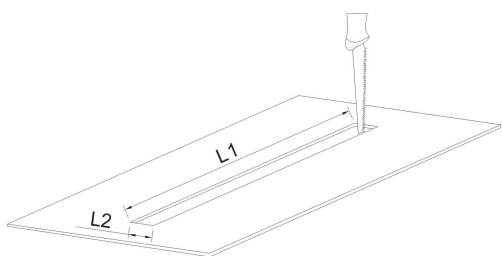


(3) Fix 8FT Shell in the slot.

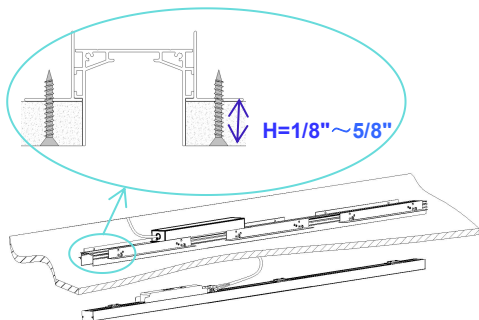


(5) Install 4ft fixture to 4ft Shell

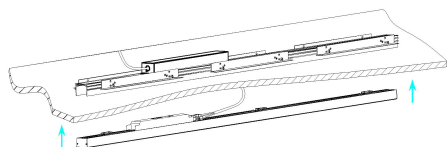

(2) Adjust installation wing to the desired height and secure to the fixture.

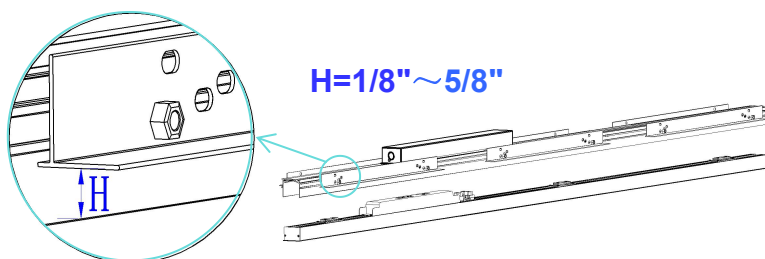


(4) Connect the lamp input line in outlet box according to the color mark corresponding to the city electricity and dimming signal line, strain relief device need to be used before cord entry the outlet box during installation

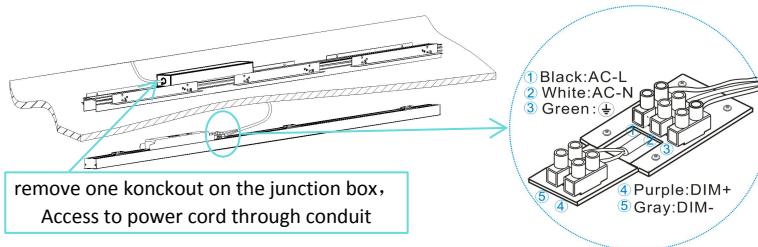

Note: connect to ①、②、③ only if do not need to use dimming function, no need to connect ④、⑤

(6) Install is now complete.

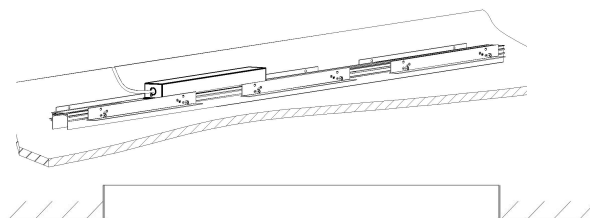

Recessed installation parameter

Size	L2446mm (8.02Ft)
L1 scale	2448mm (8.03Ft) ±1mm
L2 scale	38mm (0.125Ft)

Attention:

1. Please read instruction seriously before assembly & installation, lighting fixture must be assembled according to instruction by qualified & licensed electrician. Anything unclear please contact to manufacturer or local distributor.
2. The electric source must be cut off before assembly & installation or remove.
3. The lighting fixture is used only for indoor, the aim to avoid the risk of fire or electric shock, please do not use it for outdoor, vibrant, dusty and high humidity environment.
4. The aim to make sure not to shorten the life time of lighting fixture and keep safety, please do not modify, add or change any component.
5. Please cut off electric source immediately if any abnormality occur so that avoid any danger or malfunction, and lighting fixture must be checked and repaired by professional technician.