


APPLICATIONS

Specification grade, recessed perimeter elliptical wall wash to highlight wall and shelf mounted goods in commercial and retail environments. Provides uniform VERTICAL surface lighting.

FEATURES & BENEFITS

- ◆ 1 or 2 lamp positions (contact factory for 3 lamp availability)
- ◆ Post painted powder coat finish
- ◆ Clear 0.10 thick A12 acrylic lens is standard; many options available
- ◆ Flush steel hinges from either side; field reversible
- ◆ Access plate to simplify installation
- ◆ Recessed inverted T-Bar ceilings. Grid mount

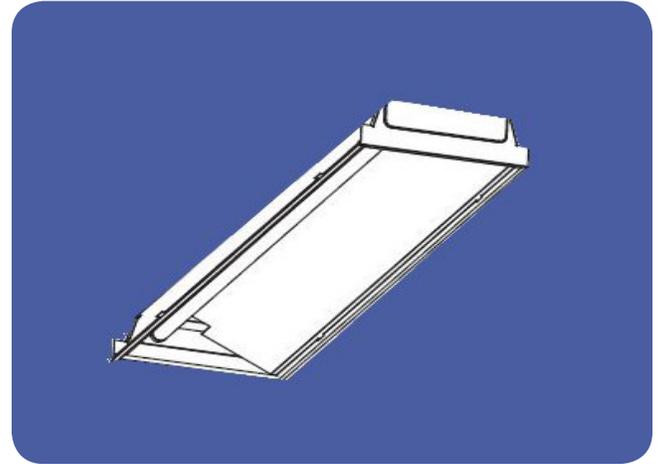

SPECIFICATIONS

Housing is die-formed and embossed code 22 gauge steel. Finish is high reflectance baked white enamel. Wiring knockouts are provided on back and end of housing. Ballast cover or reflector snaps into place; no tools required for ballast access. Premium, full specular reflectors increase efficiency and provide even wall wash illumination. Listed by and bears **UL** label.

ORDERING DATA

EXAMPLE: RGWW-13212XSMV

RGWW			XS		
Series	Lamp Position	Lamp Type	1x4 Size Code	Reflector	Ballast Type
RGWW	1 1 Lamp 2 2 Lamp *Lamps not included	28 46" T5 32 48" T8 54 46" T5HO	(req'd on all item numbers) 12 The 12 size code must appear in all 1x4 items	XS Mirrored reflector	MV Electronic 120V to 277V 120V Electronic 120V 277V Electronic 277V R120 Residential Electronic 120V PMV Program Start Multivolt

Options

- B1** T8/T5 1L 500 Lumens Battery Backup (B11)
- B2** T8/T5 1L/2L 700 Lumens Battery Backup (B48)
- B3** T8/T5 1L/2L 1400 Lumens Battery Backup (B223)
- B4** T8/T5 1L/2L 3000 Lumens Battery Backup (B510)
*Remote mount only
- B51** T5HO 1L 500 Lumens Battery Backup (B625)
- B52** T5HO 1L 800 Lumens Battery Backup (B585)
- B53** T5HO 1L 1300 Lumens Battery Backup (B626)
- WP** Greenfield 3 Wire
- WP** Greenfield 4 Wire
- L41** 741K Lamps Installed
- L35** 735K Lamps Installed
- L841** 841K Lamps Installed
- L835** 835K Lamps Installed

*Please use part# () to order battery separately

Brands

Code No.	Description
A	Advance
G	GE Ballast
L	Lutron
S	Sylvania Ballast
U	Universal

Performance Levels

		Ballast		
Manufacturer	Standard - Leave blank if no preference	High Efficiency Instant Start	High Efficiency Program Start	
Advance (A)	Centium ICN (A)	Optanium (AL, AN, AH)	Optanium PS (APL, APN ???)	
GE (G)	Proline GE (G)	UltraMax (GL, GN, GH)	UltraStart (GPL, GPH, GPH)	
Osram/Sylvania (S)	Quicktronic Pro (S)	Quicktronic QHE (SL, SN, SH)	ProStart (SPL, SPN, SPH)	
Universal (U)	ULT STD Electronic (U)	HP Electronic (UL, UN, UH)	AccuStart (UPI, UPN, UPH)	

Dimensions and specifications subject to change without notice.


◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#	
JOB NAME	
TYPE	



DIMENSIONS

END/BACK VIEWS

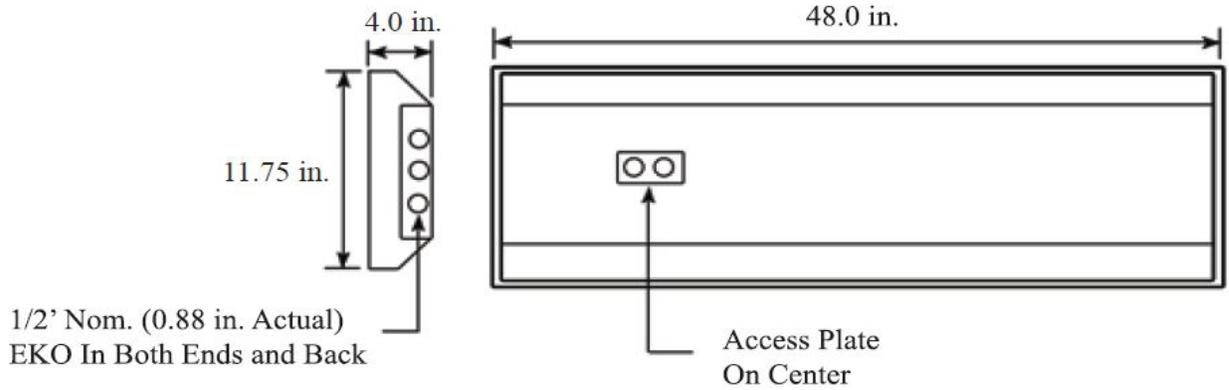

Dimensions and specifications subject to change without notice.

