

APPLICATIONS

Surface mount, specification grade, direct/indirect dual diffuser luminaire provides smooth and uniform ambient lighting for all commercial and industrial buildings. Reflected light from matte surfaces provide a softened "sky light" appearance to the modern office environment. Choice of perforated basket or linear ribbed lens.



FEATURES & BENEFITS

- ◆ Direct/indirect mimics "sky light" appearance
- ◆ Matte white reflective surfaces for soft, uniform light distribution
- ◆ Over 80% efficiency when used with optional ribbed acrylic diffuser
- ◆ Recessed dual perforated diffuser with acrylic overlay
- ◆ For use in recessed inverted T-Bar or grid ceilings
- ◆ 2 lamp positions. 4 lamp option for T5
- ◆ T5 or T8 options
- ◆ Call for IES files
- ◆ Every fixture is individually tested
- ◆ **UL** listed for damp location



Choice of perforated basket (PF) or linear ribbed acrylic diffuser (RL) shown. Will linear ribbed diffuser, fixtures are over 80% efficient.

SPECIFICATIONS

Housing is die-formed and embossed code 20 gauge steel. Luminaire body finish is high reflectance baked white enamel, with matte white reflectors. Wiring knockouts are provided on the back of housing. Diffusers are perforated to maintain even brightness, and provided with an internal, acrylic overlay to obscure lamps. Listed by and bears **UL** label.

ORDERING DATA

EXAMPLE: SRDISD24-232PFMVB1

SRDISD		Lamp Type		Diffuser		Ballast Type		Options	
Series	Size	14	22" T5	PF	Perforated Basket	MV	Multivolt	B1	T8/T5 1L 500 Lumens Battery Backup (B11)
SRDISD	22 2x2	17	24" T8	RL	Ribbed Lens	120	120 Volt	B2	T8/T5 1L/2L 700 Lumens Battery Backup (B48)
	24 2x4	24	22" T5HO	FR	Frosted Lens	277	277 Volt	B3	T8/T5 1L/2L 1400 Lumens Battery Backup (B223)
		28	46" T5	*PF is standard		R120	Residential 120V	B51	T5HO 1L 500 Lumens Battery Backup (B625)
		32	48" T8			PMV	Program Multivolt	B52	T5HO 1L 800 Lumens Battery Backup (B585)
		40BX	Biax TT5					B53	T5HO 1L 1300 Lumens Battery Backup (B626)
		54	46" T5HO					11	Dual Ballasts 1 Lamp + 1 Lamp
								21	Dual Ballasts 2 Lamp + 1 Lamp
								22	Dual Ballasts 2 Lamp + 2 Lamp
								31	Dual Ballasts 3 Lamp + 1 Lamp
								L41	741K Lamps Installed
								L35	735K Lamps Installed
								L841	841K Lamps Installed
								L835	835K Lamps Installed
								RIF	Radio Interference Filter
								WP	Whip 6Ft. 3 Wire
								WP4	Whip 6Ft. 4 Wire

Lamp Position

2 2 Lamp

(Lamps not included)

*Consult factory for 4 lamp (T5 only)

Brands

Code No.	Description
A	Advance
G	GE Ballast
L	Lutron
S	Sylvania Ballast
U	Universal

Performance Levels


Ballast			
Manufacturer	Standard - Leave blank if no preference	High Efficiency Instant Start	High Efficiency Program Start
Advance (A)	Centium ICN (A)	Optanium (AL, AN, AH)	Optanium PS (APL, APN ???)
GE (G)	Proline GE (G)	UltraMax (GL, GN, GH)	UltraStart (GPL, GPH, GPH)
Osram/Sylvania (S)	Quicktronic Pro (S)	Quicktronic QHE (SL, SN, SH)	ProStart (SPL, SPN, SPH)
Universal (U)	ULT STD Electronic (U)	HP Electronic (UL, UN, UH)	AccuStart (UPI, UPN, UPH)

Battery Backup (#) if ordering separately.
*Call factory for additional options.


Dimensions and specifications subject to change without notice.

DIMENSIONS

TOP VIEW 2x2

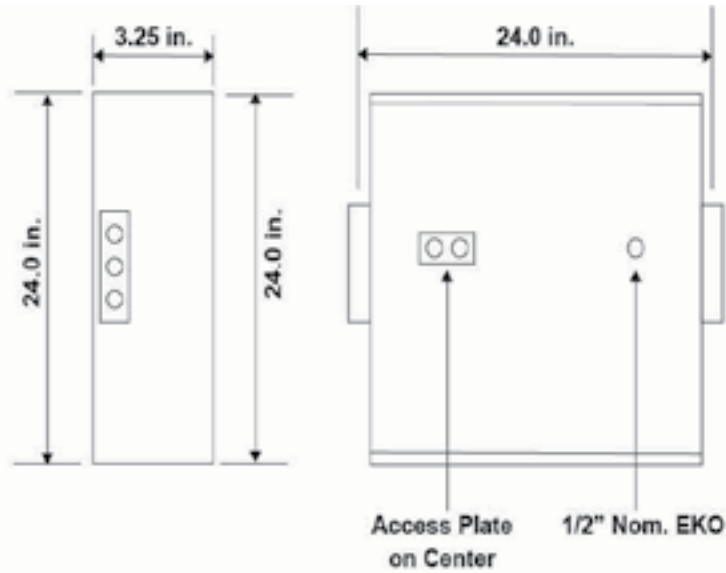

TOP VIEW 2x4

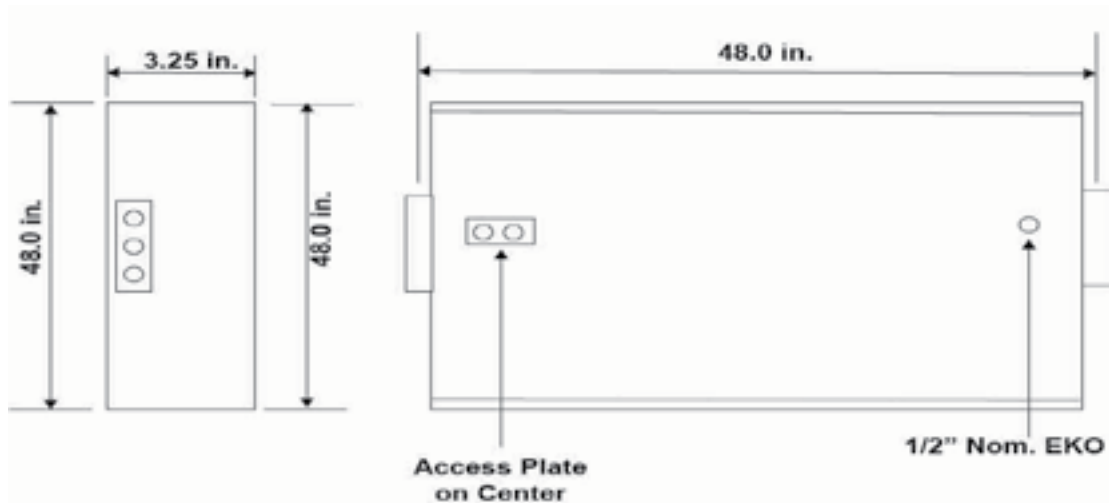

Dimensions and specifications subject to change without notice.