



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

Combination LED EXIT and emergency light fixture to indicate paths of egress.



FEATURES & BENEFITS

ILLUMINATION

- Two fully adjustable 5.4W, glare-free lamp heads
- Smooth thermoplastic reflector and plastic lens for optimal light distribution
- Ultra bright, energy efficient, long life Red or Green LED EXIT sign illumination

LENS

- High impact translucent plastic lens
- High lumen transmission and diffusing for even illumination

MOUNTING

- EZ-snap mounting canopy included for top or end mounting
- Universal knockout pattern on back plate for wall mounting

HOUSINGS

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish
- EZ snap-out Chevron directional indicators

OPTIONS

- RC: Remote capacity of up to 11.0 watts
- HTR: Optional internal heater for cold temperature (-9°C-40°C) applications
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act


ELECTRICAL

- Dual 120/277 voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- LVD (low voltage disconnect) prevents battery from deep discharge
- 6V maintenance-free rechargeable sealed lead acid battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board and lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours

WARRANTY LISTING

- Five year warranty on all electronics and housing. Battery prorated for two years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL Listed for damp locations (20°C-40°C)
- Certified to CEC under Title 20 Regulations
- Meets CSA C22.2 No. 141-02 requirements for unit equipment

DIMENSIONS

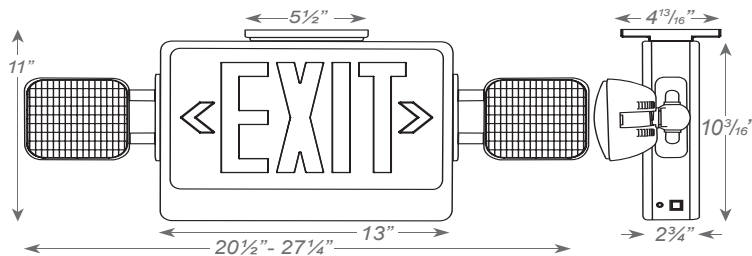

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: CXTEU 2 R W RC

CXTEU

2

1. SERIES	2. # OF FACES	3. LETTER COLOR	4. HOUSING COLOR	5. OPTIONS
CXTEU	2 Universal Single/ Double Face	R Red G Green	W White B Black	RC Remote Capacity HTR Internal Heater ¹ SDT Self-diagnostics USA Assembled in USA

Notes:

¹Not available with RC units

Special voltage & SALIDA face plate options available. Consult factory.

Dimensions and specifications subject to change without notice.