

APPLICATIONS

This mini linear pendant provides a bold look from a small fixture. With multiple mounting options, this fixture can be used individually or joined together for longer runs. End caps can be removed to join two fixtures together. Fixtures come standard in white and can be powder coated in Silver, Red, Iron or Black. Consult for custom color. This fixture is ideal for both general lighting in row configurations, spaced evenly apart, or for task lighting.

FEATURES & BENEFITS

- ◆ Accepts various lenses or louvers.
- ◆ Fixtures can be surface mounted to the ceiling or pendant hung by stem or cable.
- ◆ Rugged steel housing with anti-rust protection powder coated white. Custom paint finishes available.
- ◆ UL listed for damp locations

SPECIFICATIONS

Die-formed and welded 22 gauge cold rolled steel. Removable ends allow continuous wireway mounting. Housing is specially designed for direct/indirect lighting with separate lamps compartments for each. Fixture accepts various lenses, consult for baffles or louvers. 4' and 8' units have a steel mullion to join two individual diffusers. Snap in lens is ideal for uplight.



ORDERING DATA

EXAMPLE: L23SMW114MVWH

Series	Lamp Count	Lamp Type	Ballast Type	Finish	Configuration	Options
L23W Wall Mount L23P Pendant Mount L23S Surface Mount L23R Regular Recessed Lay-in For Dropped Ceilings L23RR Recessed w/ 1/2" Flange To Sit Behind Drywall (For Before Drywall Installation) L23RF Flange To Sit On Surface Of Drywall (For Existing Drywall Installation)	1 Downlight MW Matte white lens (std) SF Snap-in frosted acrylic lens (85% transmission) Special for LEDs.	14 22" T5 17 24" T8 24 22" T5HO 28 46" T5 28TAN 2-46" TAN T5 32 48" T8 32TAN 2-48" TAN T8 54 46" T5HO 54TAN 2-46" TAN T5HO	MV Multivolt 120-277 PMV Program Multivolt DMV Dimming MV LED** Wired 1 end hot for T8 LED tubes LED2E** Wired 2 ends hot for T8 LED tubes ** Assembled with no ballast, made for UL listed, self ballasted retrofit LED lamps. For UL Listed version, see EZ-LED	WH White BK Black SL Silver RD Red IN Iron	Blank Individual -B Beginner Run -E Ender Run -J Joiner	HC301WH Cable kit with 4' cable & power feed 0-10V Dimming. Cable incl. w/white canopy HC301WH5W Cable kit with 4' cable & power feed 0-10V Dimming. Cable incl. w/white canopy (5 wire) HC302WH Cable kit with 12' cable & power feed 0-10V Dimming. Cable incl. w/white canopy HC302WH5W Cable kit with 12' cable & power feed 0-10V Dimming. Cable incl. w/white canopy (5 wire) 2SCS24WH Two stem kits w/24" stem, canopy & mounting hardware for 4' fixture PI1 3 wire harness, including white, black and green PI2 4 wire harness, including white, black, green and blue for emergency battery backup PI3D 5 wire harness, including white, black, green, violet and gray

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆



8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE

Dimensions

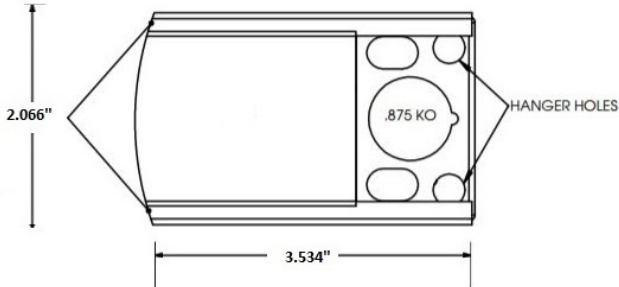

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆

8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#

JOB NAME

TYPE