



Texas Fluorescents
Reinvented

CATALOG#: _____
PROJECT: _____
TYPE: _____

Series CWLLL

LED WET LOCATION LINEAR PENDANT

Now bring your exterior applications to life with a special designed wet location linear pendant. This aluminum extrusion is 3.5” wide for a bold yet minimal look with a sealed lens to keep out moisture and bugs. Specially designed power cord and mounting kits allows the fixture to be pendant or surface mounted. Choose individual fixtures or fixtures made especially for continuous runs. Both versions complete with all mounting brackets and joiner accessories. Available in satin aluminum and in 4000 and 5000 Kelvin or consult for other custom options.

CONSTRUCTION

Aluminum housing, waterproof seals and connectors.

TYPICAL OPTIONS & ACCESSORIES

Surface or pendant mount. Joiner bracket for continuous runs. Contact factory for more details.



DIMENSIONS

48L : 48.7"L x 3.58"W x 3.58"H
96L : 96.7"L x 3.58"W x 3.58"H

FEATURES & BENEFITS

- Can be surface or pendant mounted with surface mount bracket or stem kit for pendant mount
- Suitable for commercial or residential areas
- Only available in satin aluminum
- IP66 rated for wet locations
- 0-10 Volt dimmable 120-277V
- Dimming range 1-100%
- Operating temperature -30C to 45C
- >50,000 hrs of L70 LED life
- CRI >80
- Power factor >0.90
- 5 year warranty



ORDER INFORMATION

ITEM NO.	DESCRIPTION
CWLLL48L45W4900LDMV40KSA	48.7"L x 3.58"W x 3.58"H / Frosted Lens / 45W, 4900L / 0-10V Dim / 4000K / Satin Aluminum / Included 1xWLLLPF6, 1xWLLMT
CWLLL96L90W9800LDMV40KSA	96.7"L x 3.58"W x 3.58"H / Frosted Lens / 90W, 10000L / 0-10V Dim / 4000K / Satin Aluminum / Included 1xWLLLPF6, 1xWLLMT
CWLLL48L45W4900LDMV40KSA-B	48.7"L x 3.58"W x 3.58"H / Frosted Lens / 45W, 4900L / 0-10V Dim / 4000K / Satin Aluminum / Beginner / Included 1xWLLLPF6, 1xWLLMT
CWLLL96L90W9800LDMV40KSA-B	96.7"L x 3.58"W x 3.58"H / Frosted Lens / 90W, 10000L / 0-10V Dim / 4000K / Satin Aluminum / Beginner / Included 1xWLLLPF6, 1xWLLMT
CWLLL48L45W4900LDMV40KSA-J	48.7"L x 3.58"W x 3.58"H / Frosted Lens / 45W, 4900L / 0-10V Dim / 4000K / Satin Aluminum / Joiner / Included 1xWLLMT, 1xWLLJB, WLLJN8
CWLLL96L90W9800LDMV40KSA-J	96.7"L x 3.58"W x 3.58"H / Frosted Lens / 90W, 10000L / 0-10V Dim / 4000K / Satin Aluminum / Joiner / Included 1xWLLMT, 1xWLLJB, WLLJN8
CWLLL48L45W4900LDMV40KSA-E	48.7"L x 3.58"W x 3.58"H / Frosted Lens / 45W, 4900L / 0-10V Dim / 4000K / Satin Aluminum / Beginner / Included 1xWLLMT, 1xWLLJB, WLLJN8
CWLLL96L90W9800LDMV40KSA-E	96.7"L x 3.58"W x 3.58"H / Frosted Lens / 90W, 10000L / 0-10V Dim / 4000K / Satin Aluminum / Beginner / Included 1xWLLMT, 1xWLLJB, WLLJN8
WLLLPF6	6ft black 5 wires dimming power feed with fast connector one side
WLLJN8	8.64" black dimming wiring harness with fast connector both side
WLLMT	Fix clips for surface mounted and pendant bracket / 2 pieces per set
WLLJB	180° Straight connector / 2 pieces per set
WLLJBTOOL	Joiner Bracket Tool (require 1 per continuous runs installation)




MOUNTING

Joiner (require a WLLJBTOOL, joiner bracket tool,, for each continuous run installation)
180 degree straight connect




Harness
8.67" black dimming wiring harness

Mounting Bracket
Bracket for pendant or surface mount

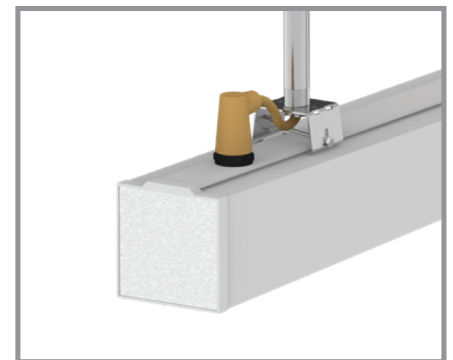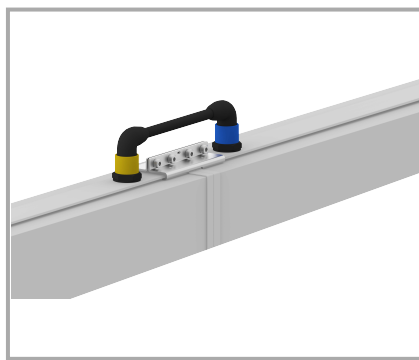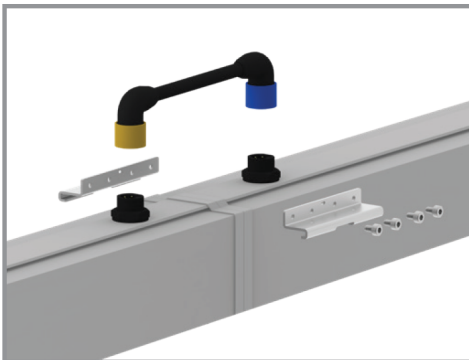

We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

DRAWINGS & IMAGES

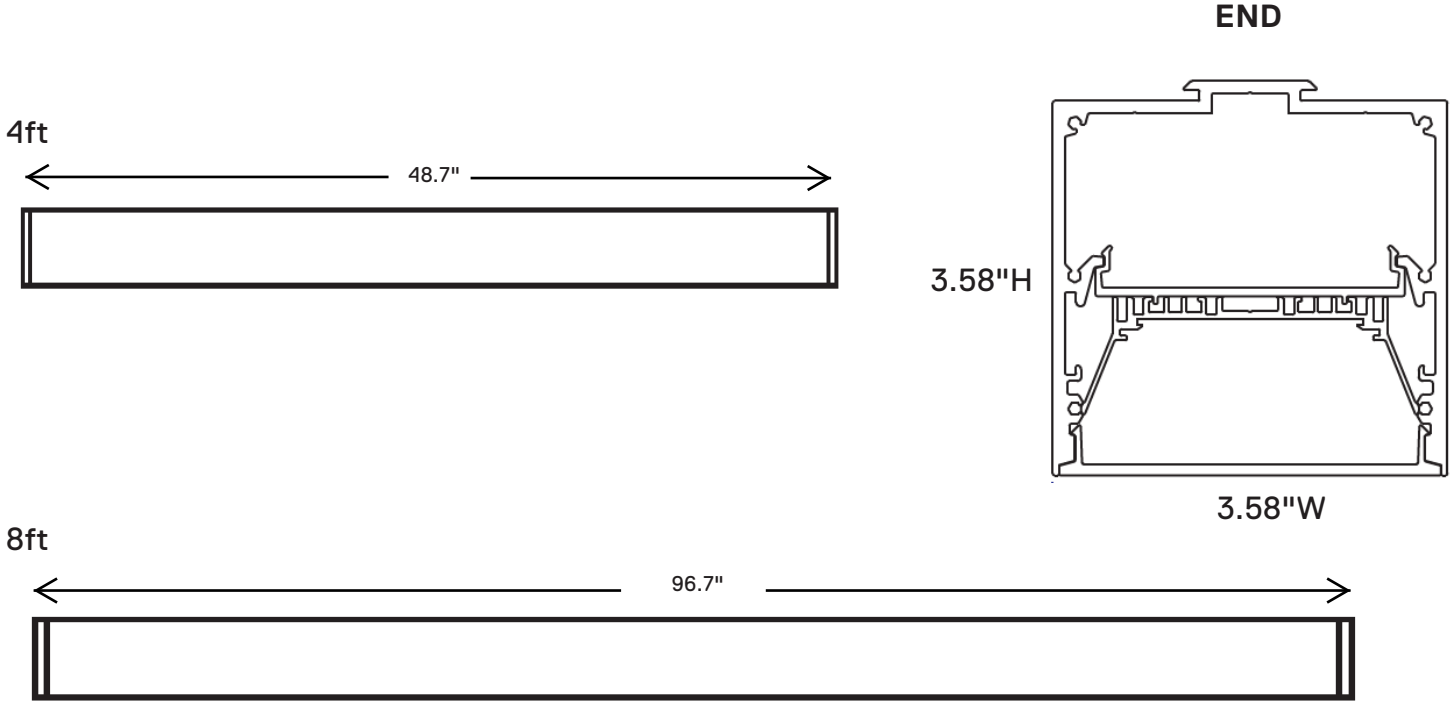

PHOTOMETRY

