



Texas Fluorescents
Reinvented

CATALOG# : _____
PROJECT : _____
TYPE : _____

Series SAR

Micro Linear with Lens

Architecturally forward design! This Low Profile Micro Designed Strip Fixture is sleek and contemporary and will work well in any environment. Multiple lengths and flexibility to run in continuous rows allows this fixture to be a perfect fit for: Schools, Offices, Conference Rooms, Designer Studios, Retail or Hospitals. This fixture would also work well for any open concept area.

CONSTRUCTION

Die-formed and welded 22 gauge cold rolled steel body with knockouts on ends allowing continuous row mounting. A 1/2" regressed flange at the bottom ensures uniformity and rigidity. Design housing with formed LED gear tray allows for uniform light and great distribution, putting light right where you need it.

MOUNTING

Hang individually with hanging cables, pendant mount or even ceiling mount. Contact factory for Wire Harness chart for plug and play harness. Consult factory for uplight options.

DIFFUSER

Both 4' and 8' fixtures include a specially formulated frosted acrylic profile lens that provides high light transmission excellent glare control



DIMENSIONS

- 4 ft. - 3.0"W x 48.0"L x 3.0"H
- 8 ft. - 3.0"W x 96.0"L x 3.0"H



FEATURES & BENEFITS

- Contemporary and sleek fixture
- Multiple lengths and lumen packages from individual or continuous runs
- Ideal for general downlight in commercial, retail, manufacturing, warehouse and display applications
- Utilizes latest generation LEDs and driver, ensuring cool-running operation
- Optional internal pluggable wiring harness for reduced labor cost in row mounting applications
- Suitable for dry and damp locations
- 50,000 hrs of L70 LED life
- CRI >80
- 0-10 Volt dimmable 120-277V
- Power factor 0.99
- 5 year warranty




DRAWINGS & IMAGES


2 ft.

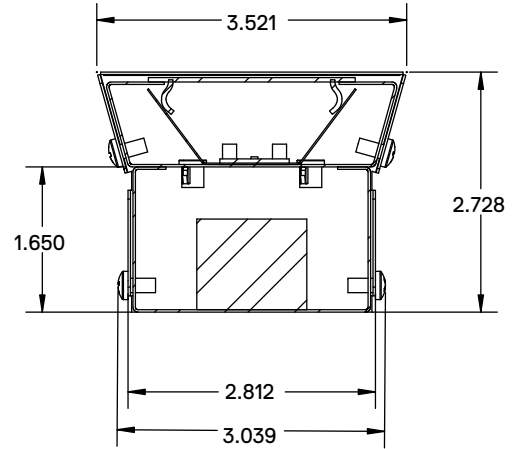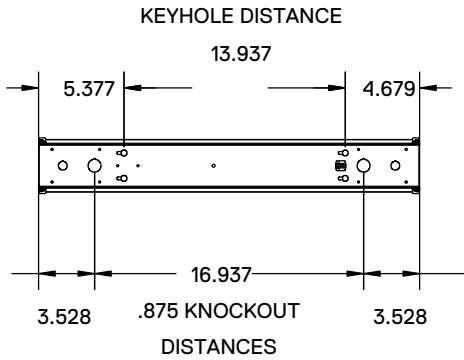

4 ft.

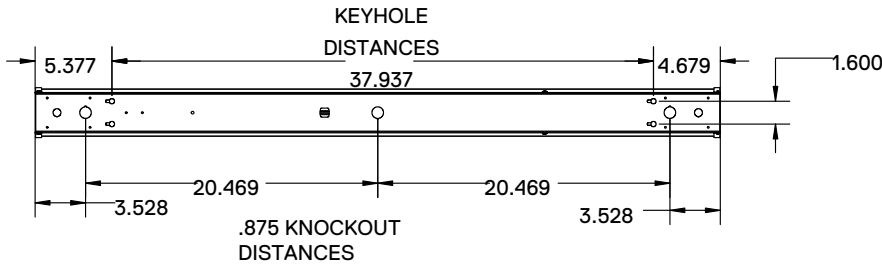

8 ft.

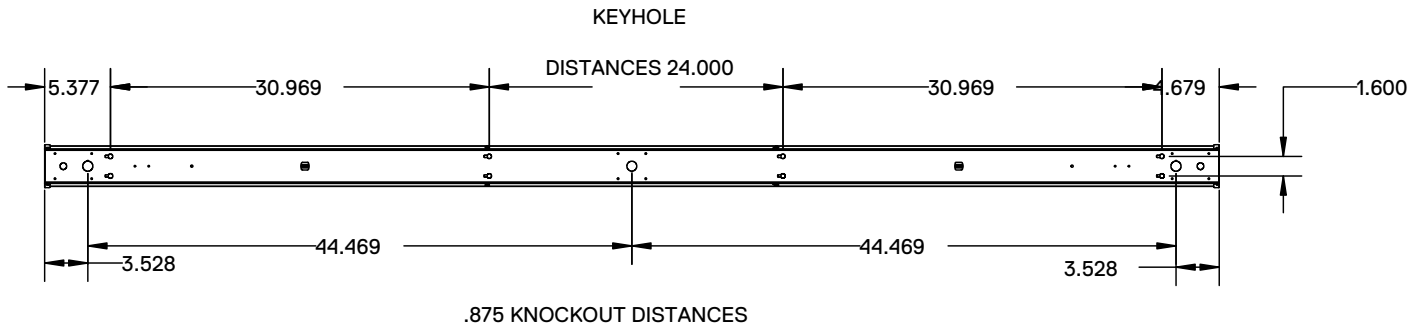

Consult for 2 foot and other lengths.

ORDER INFORMATION

SERIES	LENS MATERIAL	LENGTH	WATTAGE & LUMENS	DRIVER	COLOR	FINISH					
SAR	FR Light Frosted	24L 24"	T15W1575L 15 Watts 1575 Lumens	DMV G120 0-10V dimming ELV/Triac dimming at 120V only	30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White BK Black SI Silver					
			T19W1950L 19 Watts 1950 Lumens								
			T22W2350L 22 Watts 2350 Lumens								
		48L 48"	T30W3150L 30 Watts 3150 Lumens								
			T38W3990L 38 Watts 3990 Lumens								
			T45W4700L 45 Watts 4700 Lumens								
		96L 96"	T60W6300L 60 Watts 6300 Lumens								
			T75W7900L 75 Watts 7900 Lumens								
			T90W9450L 90 Watts 9450 Lumens								
							* * Consult factory for additional wattage, lumen options and uplift.				

OPTIONS	
EM	Emergency Battery
P11	3 wire harness including White, Black and Green
P12	4 wire harness-including White, Black, Green and Blue for Emergency Battery Backup
P13D	5 wire harness- including White, Black, Green, Violet and Gray

Note:

*Programmable LED drivers allow custom configured wattages and corresponding lumens.

We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.