



Texas Fluorescents
Reinvented

FEATURES & SPECIFICATIONS

INTENDED USE

Specification grade F-Trim troffer installs directly in plaster ceilings, with a wide face trim to cover rough-in hole. Troffer is ideal for all commercial and industrial buildings requiring recessed illumination in plaster / sheetrock ceilings.

SIZE W x L x H in inches (mm)

13.25W x 50.44L x 5.12Dp (335 x 1280 x 130)

LAMP


1 or 2 lamp positions. (Contact Factory for 3 or 4 lamp model availability)

MATERIALS & FEATURES

Housing is die-formed and embossed code 22 gage steel. Finish is high reflectance baked white enamel. Wiring knockouts are provided on back and end of housing. Ballast cover or reflector snaps into place; no tools required for ballast access. Lens is held with a hinged steel door frame; frame hinges downward on either side and is held closed by two positive cam latches. Premium, full specular reflectors are available as an option to increase efficiency or modify lighting distribution.

- Swing lugs accessed from below
- Clear 0.10thk A12 acrylic lens is standard; many options available.
- Flush steel hinges from either side; field reversible.
- Access plate to simplify installation

128 1 x 4 ft.
Lensed Static Troffer,
F-Trim Plaster Ceiling Recessed

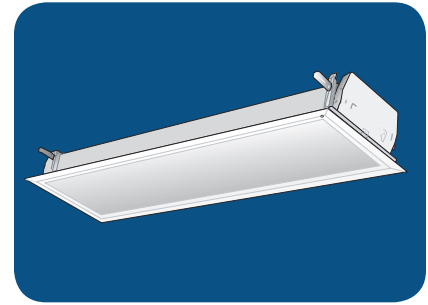

MOUNTING

F-Trim for plaster, concealed Z-spline, or wood trim ceilings. Recessed.

LISTING


Fixture & Ballast: UL Listed
Ballast: Thermally protected, class P, HPF, Non PCB

TYPICAL OPTIONS AND ACCESSORIES

Emergency ballasts, whips, regressed doors, wire guards, and lenses. See options page at the end of the T02Grid section, or contact factory for more details.

ORDERING INFORMATION

Example: 128 A 232 12 E120

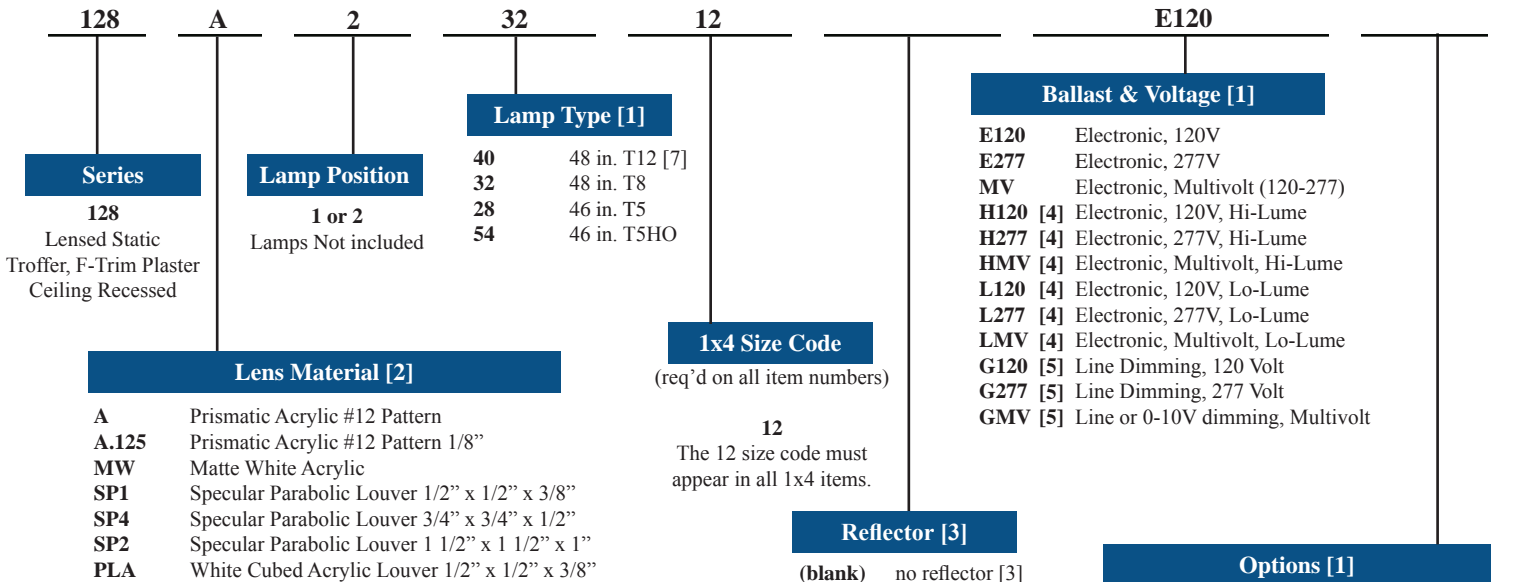


Notes
[1] See end of T02Grid for many additional lamps, ballasts, finishes, and options.
[2] Custom louvers available in any cell configuration. Contact factory for additional information.
[3] Custom reflectors available to create any light distribution.
[4] HiLume and LoLume ballasts available for T8 lamps only.
[5] Dimming ballasts available for T8 & T5HO lamps only.
[6] Magnetic ballasts available for T8 & T12 only.
[7] Magnetic & electronic T12 ballasts drive a 34W energy saver lamp.

Catalog Number:
Notes:



128 1 x 4 ft.

Lensed Static Troffer,
 F-Trim Plaster Ceiling Recessed

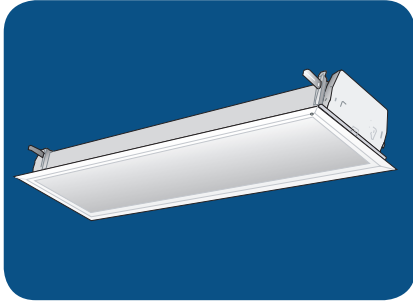

DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

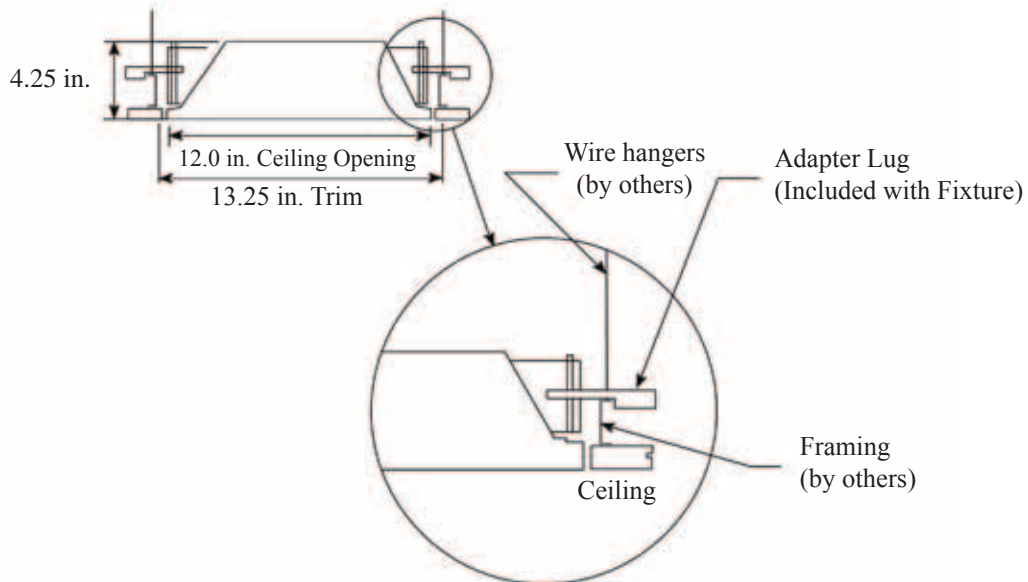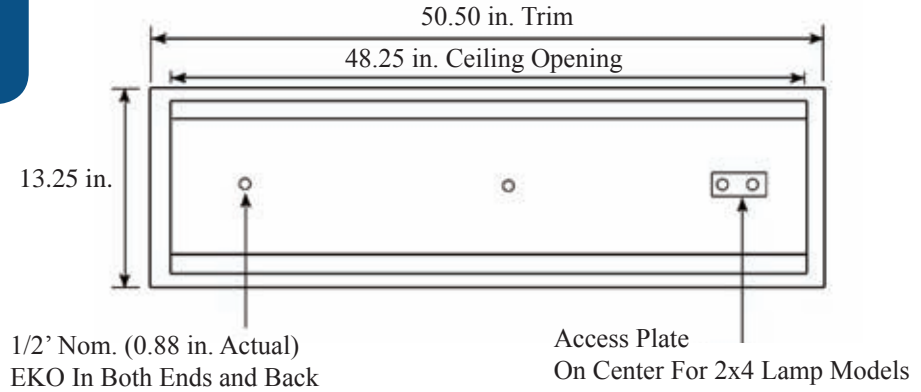

Catalog Number:
Notes:



Texas Fluorescents
Reinvented

128 2 x 4 ft. Lensed Static Troffer, F-Trim Plaster Ceiling Recessed



FEATURES & SPECIFICATIONS

INTENDED USE

Specification grade F-Trim troffer installs directly in plaster ceilings, with a wide face trim to cover rough-in hole. Troffer is ideal for all commercial and industrial buildings requiring recessed illumination in plaster / sheetrock ceilings.

SIZE W x L x H in inches (mm)

24.75W x 50.44L x 5.12Dp (335 x 1280 x 130)

LAMP

2, 3, or 4 lamp positions.

MATERIALS & FEATURES

Housing is die-formed and embossed code 22 gage steel. Finish is high reflectance baked white enamel. Wiring knockouts are provided on back and end of housing. Ballast cover or reflector snaps into place; no tools required for ballast access. Lens is held with a hinged steel door frame; frame hinges downward on either side and is held closed by two positive cam latches. Premium, full specular reflectors are available as an option to increase efficiency or modify lighting distribution.

- Swing out lugs accessed from below.
- Clear 0.10 thick A12 acrylic lens is standard; many options available.
- Flush steel hinges from either side; field reversible.
- Access plate to simplify installation

MOUNTING

F-Trim for plaster, concealed Z-spline, or wood trim ceilings. Recessed.

LISTING

Fixture & Ballast: UL Listed
Ballast: Thermally protected, class P, HPF, Non PCB

TYPICAL OPTIONS AND ACCESSORIES

Emergency ballasts, whips, regressed doors, wire guards, and lenses. See options page at the end of the T02Grid section, or contact factory for more details.

ORDERING INFORMATION

Example: 128 A 232 E120

128	A	2	32	E120
Series	Lamp Position	Reflector [3]		Ballast & Voltage [1]
128 Lensed Static Troffer, F-Trim Plaster Ceiling Recessed	2, 3, or 4 Lamps Not included	(blank) no reflector [3] M20 Mirrored reflector		E120 [4] Electronic, 120V E277 [4] Electronic, 277V MV [4] Electronic, Multivolt (120-277) H120 [4] Electronic, 120V, Hi-Lume H277 [4] Electronic, 277V, Hi-Lume HMV [4] Electronic, Multivolt, Hi-Lume L120 [5] Electronic, 120V, Lo-Lume L277 [5] Electronic, 277V, Lo-Lume LMV [5] Electronic, Multivolt, Lo-Lume G120 Line Dimming, 120 Volt G277 Line Dimming, 277 Volt GMV Line or 0-10V dimming, Multivolt
Lens Material [2]		Lamp Type [1]		Options [1]
A	Prismatic Acrylic #12 Pattern	40	48 in. T12 [7]	WP
A.125	Prismatic Acrylic #12 Pattern 1/8"	32	48 in. T8	WP10
MW	Matte White Acrylic	28	46 in. T5	EM
SP1	Specular Parabolic Louver 1/2" x 1/2" x 3/8"	54	46 in. T5HO	EM14
SP4	Specular Parabolic Louver 3/4" x 3/4" x 1/2"			Emergency ballast, 500 lumens [4]
SP2	Specular Parabolic Louver 1 1/2" x 1 1/2" x 1"			Emergency ballast, 1400 lumens [4]
PLA	White Cubed Acrylic Louver 1/2" x 1/2" x 3/8"			EM14 ballast required for T5 & T5HO lamps

Notes

- [1] See end of T02Grid for many additional lamps, ballasts, finishes, and options.
- [2] Custom louvers available in any cell configuration. Contact factory for additional information.
- [3] Custom reflectors available to create any light distribution.
- [4] HiLume and LoLume ballasts available for T8 lamps only.
- [5] Dimming ballasts available for T8 & T5HO lamps only.
- [6] Magnetic ballasts available for T8 & T12 only.
- [7] Magnetic & electronic T12 ballasts drive a 34W energy saver lamp.

Saylite
2055 Luna Rd. Suite 142 Carrollton, TX 75006
Phone: 972-247-3171 Fax: 972-247-0200
www.saylite.com email: sales@saylite.com

Catalog Number:
Notes:

128 2 x 4 ft.

Lensed Static Troffer,
F-Trim Plaster Ceiling Recessed





Texas Fluorescents
Reinvented



DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

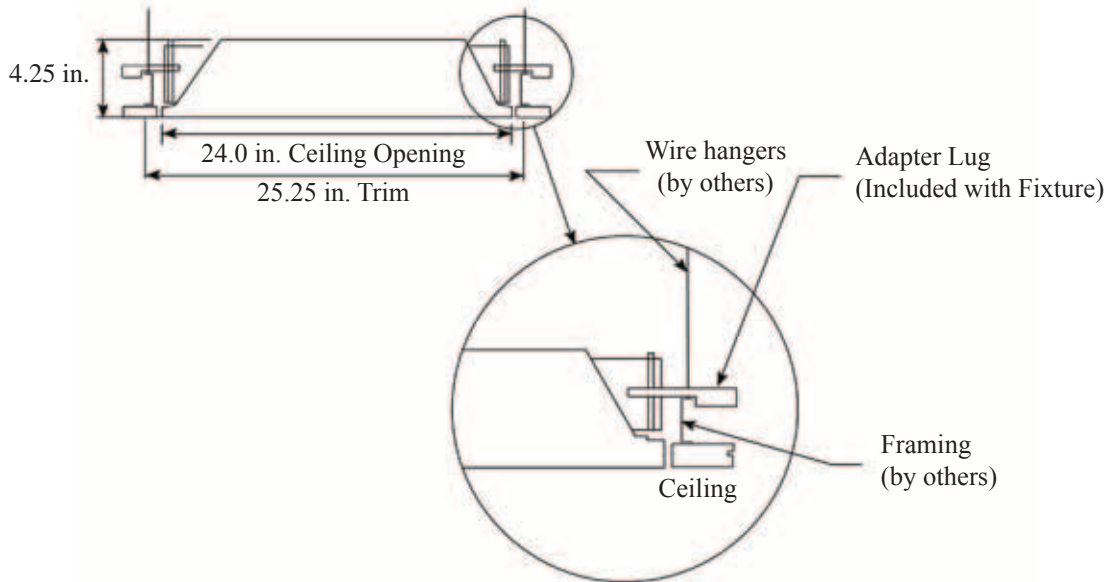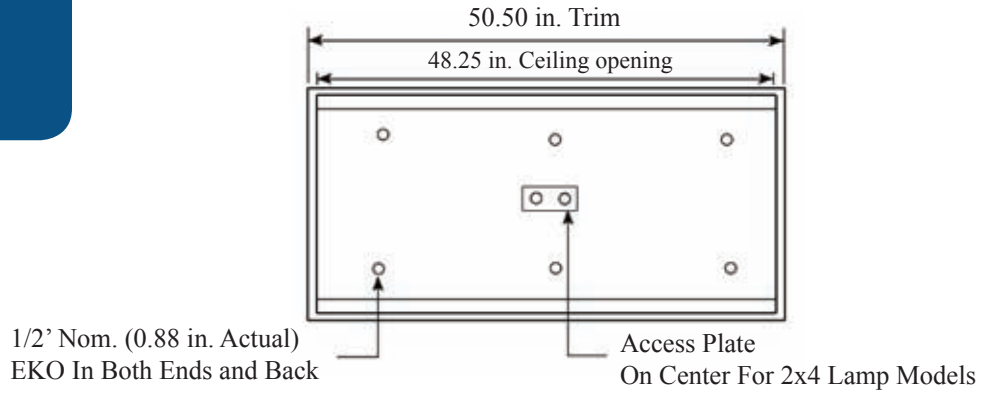

Catalog Number:
Notes: