

APPLICATIONS

Premium grade fluorescent strip fixture using high efficiency T5 Technology. Available in a compact one or two light configurations especially suited for areas with minimal space requirements such as cove lighting, store fixture, signage, under cabinets, closets, display cases, vending machines and confined areas requiring illumination and ease of installation

FEATURES & BENEFITS

- ◆ Standard finish is white
- ◆ Optional white reflectors available
- ◆ Advanced high efficiency T5 technology - (14W and higher)
- ◆ Available with one or two lamp configurations
- ◆ Available in lengths from 12 to 48 inches - (1', 1.25', 2', 3', 4' lengths)
- ◆ Continuous row mounting capability
- ◆ Pre-lamp available
- ◆ Shallow design
- ◆ Every fixture is individually tested
- ◆ **UL** listed for damp location



SPECIFICATIONS

Housing is die and brake formed from cold rolled steel. One piece folded construction. Finish is high reflectance baked white enamel. End caps may be butted together for continuous row mounting. Knockouts are provided for flexible conduit attachment. Listed by and bears **UL** label.

ORDERING DATA

EXAMPLE: 41 1 54 EL5HO DT

Series	# of Lamps	Lamp Size	Housing Type	Ballast Type	Options
41	1 1 Lamp 2 2 Lamp	*06 T5 9" *08 T5 12" 14 T5 22" 21 T5 34" 28 T5 46" 24 T5HO 22" 39 T5HO 34" 54 T5HO 46"	Blank Standard N Narrow (2 Lamp only)	MV Multi-volt 120-277V DMV Dimming Multi-volt LED** Wired 1 end hot for T8 LED Tubes LED-2E** Wired 2 ends hot for T8 LED Tubes	CP3 Cord & Plug F Fused L1 Lamp included (T5-4100K cool white) RIF Radio interference filter
		*1 lamp only	** Assembled with no ballast, Made for UL Listed self ballasted retrofit LED lamps		***See chart below for whip & cord ordering options Call for additional options


***Cord & Whip Ordering Chart (Add to End of Fixture Part Number)

Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip CS - Cordset	(Blank) 3 Wire 4 - 4 Wire 5 - 5 Wire 6 - 6 Wire	(Blank) 6 feet 8 - 8 feet 10 - 10 feet 12 - 12 feet 15 - 15 feet	(Blank) No Plug P* - Standard Plug TL* - Twist Lock	BK - Black WH - White	(Blank) 120-277V 120 - 120V 277 - 277V 347 - 347V 480 - 480V	15 - 15 Amps 20 - 20 Amps


Dimensions and specifications subject to change without notice.




DIMENSIONS

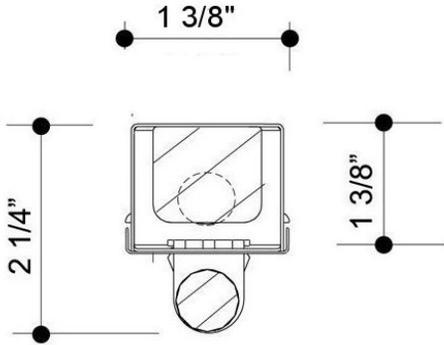

STANDARD
One Lamp
T5



NARROW
Two Lamp
T5

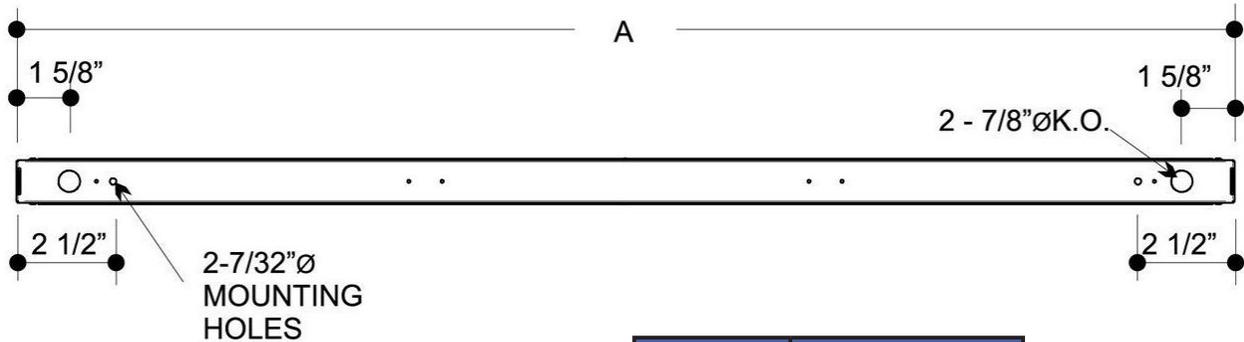

Nominal Length	Actual Length A (in.)
1'	11 31/32"
1.25'	14 31/32"
2'	22 7/18"
3'	34 9/32"
4'	46 1/16"

Dimensions and specifications subject to change without notice.

