

### APPLICATIONS

Side mounted fluorescent strip fixtures. For use in indoor applications with restricted space, where shallow design, high performance and ease of installation are required. Designed for cove, valance and display lighting.

### FEATURES & BENEFITS

- ◆ Side mounted lamps
- ◆ Snap together design
- ◆ Low profile housing
- ◆ Available in lengths from 18 to 96 inches - (1.5', 2', 3', 4', 6', 8' lengths)
- ◆ Single sided or double sided units available
- ◆ Single or continuous row mounting capability
- ◆ Uses T5 or T8 lamps
- ◆ Steel housing and ends with white enamel finish
- ◆ **UL** listed for damp location



### SPECIFICATIONS

Housing and ends are die-formed from cold rolled steel. Finish is high reflectance baked white enamel. Snap-in end caps may be butted together for continuous row mounting. Snap-on ballast covers for simple installation and maintenance. Single wireway cover. Knockouts are provided for flexible conduit attachment. Listed by and bears **UL** label.

### ORDERING DATA

**EXAMPLE: 42SC 1 32 ELO DT B1**

42SC

Series	# of Lamps	Lamp Size	Voltage	Options*
<b>42SC</b>	1 1 Lamp	<b>15</b> T8 18"	<b>MV</b> Multivolt	<b>B1</b> Battery backup 1 lamp
	2 2 Lamp	<b>17</b> T8 24"	120-277V	<b>B2</b> Battery backup 2 lamp
		<b>25</b> T8 36"	<b>DMV</b> Dimming	<b>11</b> Dual ballast
		<b>25TAN</b> T8 2 - 36" tandem	120-277V	1 lamp + 1 lamp
		<b>32</b> T8 48"	0-10V	<b>RIF</b> Radio Interference Filter
		<b>32TAN</b> T8 2 - 48" tandem		
		<b>54</b> T5HO 46"		
	<b>54TAN</b> T5HO 2 - 46" tandem			


\* Call for additional options

\*\*See chart below for whip & cord ordering options

#### \*\*Cord & Whip Ordering Chart (Add to End of Fixture Part Number)

Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
<b>WP</b> - Whip	(Blank) 3 Wire	(Blank) 6 feet	(Blank) No Plug	<b>BK</b> - Black	(Blank) 120-277V	<b>15</b> - 15 Amps
<b>CS</b> - Cordset	4 - 4 Wire	8 - 8 feet	<b>P*</b> - Standard Plug	<b>WH</b> - White	<b>120</b> - 120V	<b>20</b> - 20 Amps
	5 - 5 Wire	10 - 10 feet	<b>TL*</b> - Twist Lock		<b>277</b> - 277V	
	6 - 6 Wire	12 - 12 feet			<b>347</b> - 347V	
		15 - 15 feet			<b>480</b> - 480V	

### DIMENSIONS

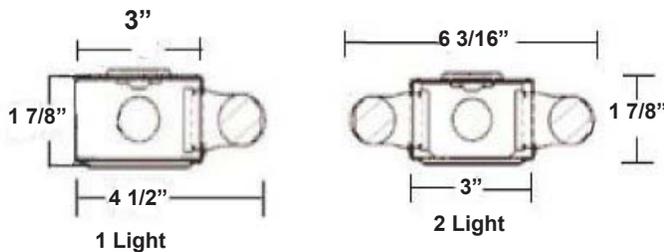

Note: All dimensions nominal

Dimensions and specifications subject to change without notice.

