

APPLICATIONS

Premium grade surface mounted wraparound luminaire with low brightness linear sides. For use in indoor applications where high efficiency, high performance and ease of installation is required. Ideal for retail stores, stairwells, utility areas, schools, offices and public buildings.

FEATURES & BENEFITS

- ◆ Nominal 11" and 15" wraps
- ◆ Clear acrylic diffuser with prismatic bottom and ribbed linear sides
- ◆ Diffuser self-aligns and hinges from either side for easy maintenance
- ◆ Available in multiple lamp configurations
- ◆ Available in lengths from 24 to 96 inches - (2', 3', 4', 6', and 8' lengths)
- ◆ Surface, stem or chain mountable
- ◆ Single or continuous row mounting capability
- ◆ Every fixture individually tested
- ◆ **UL** listed for damp location



SPECIFICATIONS

Housing and ends are die-formed from cold rolled steel. Finish is high reflectance baked white enamel with a reflectance factor exceeding 86%. Ballast cover snaps into place eliminating the need for tools when accessing the ballast. Diffuser hinges from either side in a lift and shift manner and is self-centering. Listed by and bears **UL** label.

ORDERING DATA

EXAMPLE: 772 2 32 MV B1

772																																					
Series	Type	# of Lamps	Lamp Type	Ballast Type	Options																																
772 Premium Wraparound	Blank Standard (All lamps available) N Narrow Unit (1L & 2L available)	1 1 Lamp* 2 2 Lamp 3 3 Lamp* 4 4 Lamp	14 22" T5 17 24" T8 21 34" T5 24 22" T5HO 25 36" T8 28 46" T5 25TAN 2-36" TAN T8 28TAN 2-46" TAN T5 32 48" T8 32TAN 2-48" TAN T8 39 36" T5HO 54 46" T5HO 54TAN 2-46" TAN T5HO 72T8 72" T8HO 72T8HO 72" T12HO (Voltage Specific) 96T8 96" T8 96T8HO 96" T8HO 96T12ELHO 96" T12HO	MV Electronic 120V to 277V 120V Electronic 120V 277V Electronic 277V R120 Residential Electronic 120V PMV Program Start Multivolt LED** Wired 1 end hot for T8 LED tubes LED2E** Wired 2 ends hot for T8 LED tubes	** Assembled with no ballast, made for UL Listed, self ballasted retrofit LED lamps																																
<table border="1"> <thead> <tr> <th>Options</th> <th>Description</th> </tr> </thead> <tbody> <tr><td>B1</td><td>T8/T5 1L 500 Lumens Battery Backup (B11)</td></tr> <tr><td>B2</td><td>T8/T5 1L/2L 700 Lumens Battery Backup (B48)</td></tr> <tr><td>B3</td><td>T8/T5 1L/2L 1400 Lumens Battery Backup (B223)</td></tr> <tr><td>B51</td><td>T5HO 1L 500 Lumens Battery Backup (B625)</td></tr> <tr><td>B52</td><td>T5HO 1L 800 Lumens Battery Backup (B585)</td></tr> <tr><td>B53</td><td>T5HO 1L 1300 Lumens Battery Backup (B626)</td></tr> <tr><td>SW</td><td>Smooth White Lens (773 Series)</td></tr> <tr><td>OS</td><td>Occupancy Sensor</td></tr> <tr><td>11</td><td>Dual Ballasts 1 Lamp + 1 Lamp</td></tr> <tr><td>21</td><td>Dual Ballasts 2 Lamp + 1 Lamp</td></tr> <tr><td>22</td><td>Dual Ballasts 2 Lamp + 2 Lamp</td></tr> <tr><td>31</td><td>Dual Ballasts 3 Lamp + 1 Lamp</td></tr> <tr><td>RIF</td><td>Radio Interference Filter</td></tr> <tr><td>XS</td><td>Silver MIRO 4 Reflector</td></tr> </tbody> </table>								Options	Description	B1	T8/T5 1L 500 Lumens Battery Backup (B11)	B2	T8/T5 1L/2L 700 Lumens Battery Backup (B48)	B3	T8/T5 1L/2L 1400 Lumens Battery Backup (B223)	B51	T5HO 1L 500 Lumens Battery Backup (B625)	B52	T5HO 1L 800 Lumens Battery Backup (B585)	B53	T5HO 1L 1300 Lumens Battery Backup (B626)	SW	Smooth White Lens (773 Series)	OS	Occupancy Sensor	11	Dual Ballasts 1 Lamp + 1 Lamp	21	Dual Ballasts 2 Lamp + 1 Lamp	22	Dual Ballasts 2 Lamp + 2 Lamp	31	Dual Ballasts 3 Lamp + 1 Lamp	RIF	Radio Interference Filter	XS	Silver MIRO 4 Reflector
Options	Description																																				
B1	T8/T5 1L 500 Lumens Battery Backup (B11)																																				
B2	T8/T5 1L/2L 700 Lumens Battery Backup (B48)																																				
B3	T8/T5 1L/2L 1400 Lumens Battery Backup (B223)																																				
B51	T5HO 1L 500 Lumens Battery Backup (B625)																																				
B52	T5HO 1L 800 Lumens Battery Backup (B585)																																				
B53	T5HO 1L 1300 Lumens Battery Backup (B626)																																				
SW	Smooth White Lens (773 Series)																																				
OS	Occupancy Sensor																																				
11	Dual Ballasts 1 Lamp + 1 Lamp																																				
21	Dual Ballasts 2 Lamp + 1 Lamp																																				
22	Dual Ballasts 2 Lamp + 2 Lamp																																				
31	Dual Ballasts 3 Lamp + 1 Lamp																																				
RIF	Radio Interference Filter																																				
XS	Silver MIRO 4 Reflector																																				

**Cord & Whip Ordering Chart (Add to End of Fixture Part Number)

Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip CS - Cordset	(Blank) 3 Wire 4 - 4 Wire 5 - 5 Wire 6 - 6 Wire	(Blank) 6 feet 8 - 8 feet 10 - 10 feet 12 - 12 feet 15 - 15 feet	(Blank) No Plug P* - Standard Plug TL* - Twist Lock	BK - Black WH - White	(Blank) 120-277V 120 - 120V 277 - 277V 347 - 347V 480 - 480V	15 - 15 Amps 20 - 20 Amps

- * Call factory for additional options
- * Lamps purchased separately
- ** See chart for whip and cordset options

Dimensions and specifications subject to change without notice.



Performance Levels


Ballast			
Manufacturer	Standard - Leave blank if no preference	High Efficiency Instant Start	High Efficiency Program Start
Advance (A)	Centium ICN (A)	Optanium (AL, AN, AH)	Optanium PS (APL, APN ???)
GE (G)	Proline GE (G)	UltraMax (GL, GN, GH)	UltraStart (GPL, GPH, GPH)
Osram/Sylvania (S)	Quicktronic Pro (S)	Quicktronic QHE (SL, SN, SH)	ProStart (SPL, SPN, SPH)
Universal (U)	ULT STD Electronic (U)	HP Electronic (UL, UN, UH)	AccuStart (UPI, UPN, UPH)

Brands


Code No.	Description
A	Advance
G	GE Ballast
L	Lutron
S	Sylvania Ballast
U	Universal

DIMENSIONS

TOP VIEW

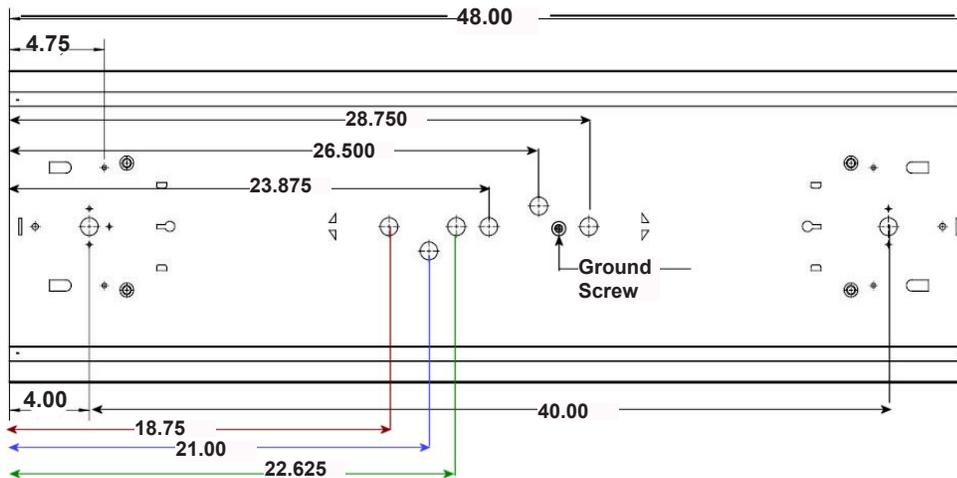

END VIEWS

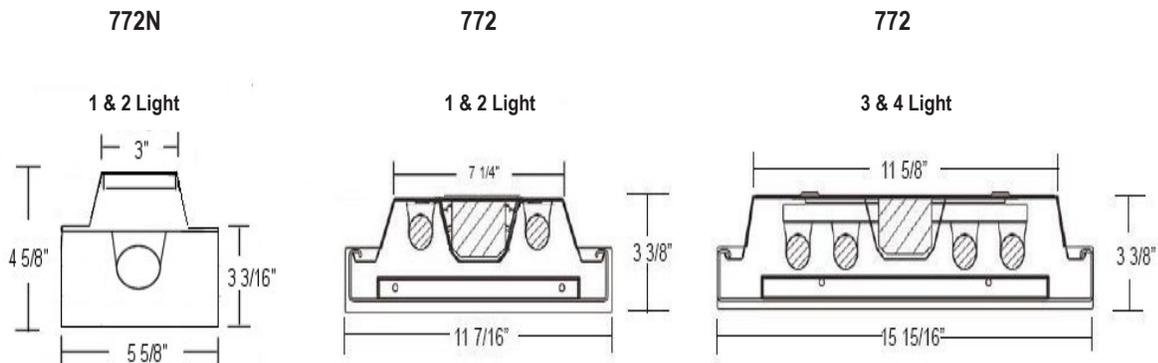

Dimensions and specifications subject to change without notice.

