

### APPLICATIONS

This line of heavy duty open slimline fixtures provides the most economical lighting for industrial and commercial applications such as factories, warehouses, workshops, utility areas and public buildings.

### FEATURES & BENEFITS

- ◆ Deep housing with longitudinal ribs for added structural stability
- ◆ Designed for high output lamp applications
- ◆ Snap-on components for easy assembly and maintenance
- ◆ Available in lengths from 36 to 96 inches - (3', 4', 6', 8' lengths)
- ◆ Combination of end plate/coupler can be used for continuous row mounting
- ◆ Surface, stem or chain mountable
- ◆ Uses T5, T8 or T12 lamps
- ◆ UL Listed for damp location



### SPECIFICATIONS

Housing and ends are die-formed from cold rolled steel. Finish is high reflectance baked white enamel. Snap-in end plates can serve as joiners for continuous row mounting. Snap-on ballast covers are two piece for simple installation and maintenance. Knockouts are provided for flexible conduit attachment and stem mounting. Mounting holes are provided. Listed by and bears **UL** label.

### ORDERING DATA


**EXAMPLE: 81 2 32 ELO DT B1**

Series	# of Lamps	Lamp Size	Ballast Type	Voltage	Options*	
81	1	1 Lamp	T8	36"	<b>EL5HO</b> Electronic T5HO	<b>B1</b> Battery backup 1 lamp <b>B2</b> Battery backup 2 lamp <b>+</b> 2 ballasts <b>RIF</b> Radio interference filter  *Call for additional options **See chart below for whip & cord ordering options
	2	2 Lamp	<b>25TAN</b> T8	2-36" tandem	<b>ELO</b> Electronic T8	
	3	3 Lamp	<b>32</b> T8	48"	<b>ELOHO</b> Electronic T8HO	
	4	4 Lamp	<b>32TAN</b> T8	2-48" tandem	<b>EL</b> Electronic T12	
			<b>34</b> T12	48"	<b>ELHO</b> Electronic T12HO	
			<b>48</b> T8HO/T12HO	48"	<b>D</b> Dimming	
			<b>54</b> T5HO	46"	<b>Add suffix</b>	
			<b>54TAN</b> T5HO	2-46" tandem	(i.e. EL5HOD)	
			<b>72</b> T8HO/T12HO	72"		
			<b>96</b> T8SL	96"		
			<b>96</b> T8HO/T12HO	96"		


#### \*\*Cord & Whip Ordering Chart (Add to End of Fixture Part Number)

Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
<b>WP</b> - Whip	(Blank) 3 Wire	(Blank) 6 feet	(Blank) No Plug	<b>BK</b> - Black	(Blank) 120-277V	15 - 15 Amps
<b>CS</b> - Cordset	4 - 4 Wire	8 - 8 feet	<b>P*</b> - Standard Plug	<b>WH</b> - White	120 - 120V	20 - 20 Amps
	5 - 5 Wire	10 - 10 feet	<b>TL*</b> - Twist Lock		277 - 277V	
	6 - 6 Wire	12 - 12 feet			347 - 347V	
		15 - 15 feet			480 - 480V	

### DIMENSIONS



**1 and 2 Light**

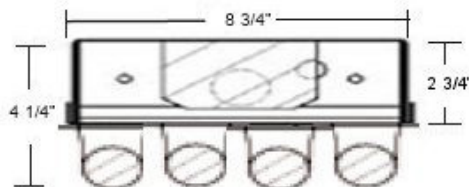

**3 and 4 Light**

Dimensions and specifications subject to change without notice.