

APPLICATIONS

Premium grade heavy duty industrial fixture suitable for surface or suspended mounting individually or in continuous rows. For use in indoor applications where industrial ruggedness and high efficiency are primary considerations. Ideal for factories, warehouses, garages, utility areas and public buildings.

FEATURES & BENEFITS

- ◆ Available in lengths from 48 to 96 inches - (4', 6', 8' lengths)
- ◆ Rugged spring loaded turret sockets provide positive lamp contact
- ◆ Heavy duty construction
- ◆ Steel housing with white enamel finish
- ◆ Continuous row mounting capability
- ◆ Optional reflectors are available with a slotted upright
- ◆ Surface, stem or chain mountable
- ◆ Every fixture individually tested
- ◆ **UL** listed for damp location



SPECIFICATIONS

Housing and ends are die-formed from heavy gauge cold rolled steel. Finish is high reflectance baked white enamel. Standard reflectors are solid and coated with a durable, high reflectance baked white enamel finish. Screw fastened end plates can be repositioned to serve as joiners for continuous row mounting. Rugged spring loaded turret sockets provide positive lamp contact. Knockouts are provided for flexible conduit attachment. Listed by and bears UL label.

ORDERING DATA

EXAMPLE: 9-214UPMVB1

Series	# of Lamps	Lamp Type	Reflector	Ballast Type	Options*
9	2	2 Lamp	14	22" T5	B1 T8/T5 1L 500 Lumens Battery Backup (B11) B2 T8/T5 1L/2L 700 Lumens Battery Backup (B48) B3 T8/T4 1L/2L 1400 Lumens Battery Backup (B223) OS Occupancy Sensor 11 Dual Ballasts 1 Lamp + 1 Lamp 21 Dual Ballasts 2 Lamp + 1 Lamp 22 Dual Ballasts 2 Lamp + 2 Lamp 31 Dual Ballasts 3 Lamp + 1 Lamp RIF Radio Interference Filter XS Silver MIRO4 Reflector XSN Narrow Silver MIRO4 Reflector (10")
	3	3 Lamp	17	24" T8	
	4	4 Lamp	24	22" T5HO	
			25	36" T8	
			25TAN	2-36" TAN T8	
			28	46" T5	
			28TAN	2-46" TAN T5	
			32	48" T8	
			32TAN	2-48" TAN T8	
			54	46" T5HO	
			54TAN	2-46" TAN T5HO	
			96T8HO	96" T8HO	
			96T8	96" T8	

*Lamps purchased separately
 **See chart on pg.2 for whip & cord ordering options

ACCESSORIES

A71 - 1 and 2 lamp wireguards 4ft
A72 - 3 and 4 lamp wireguards 4ft
 *Order 2 for 8ft unit

Brands

Code No.	Description
A	Advance
G	GE Ballast
L	Lutron
S	Sylvania Ballast
U	Universal

Performance Levels

Ballast			
Manufacturer	Standard	High Efficiency Instant Start	High Efficiency Program Start
Advance (A)	Centium ICN (A)	Optanium (AL, AN, AH)	Optanium PS (APL, APN)
GE (G)	Proline GE (G)	UltraMax (GL, GN, GH)	UltraStart (GPL, GPH, GPH)
Osram/Sylvania (S)	Quicktronic Pro (S)	Quicktronic QHE (SL, SN, SH)	ProStart (SPL, SPN, SPH)
Universal (U)	ULT STD Electronic (U)	HP Electronic (UL, UN, UH)	AccuStart (UPI, UPN, UPH)

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆

8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#


JOB NAME

TYPE


**Cord & Whip Ordering Chart (Add to End of Fixture Part Number)						
Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip	(Blank) 3 Wire	(Blank) 6 feet	(Blank) No Plug	BK - Black	(Blank) 120-277V	15 - 15 Amps
CS - Cordset	4 - 4 Wire	8 - 8 feet	P* - Standard Plug	WH - White	120 - 120V	20 - 20 Amps
	5 - 5 Wire	10 - 10 feet	TL* - Twist Lock		277 - 277V	
	6 - 6 Wire	12 - 12 feet			347 - 347V	
		15 - 15 feet			480 - 480V	

DIMENSIONS

END VIEW

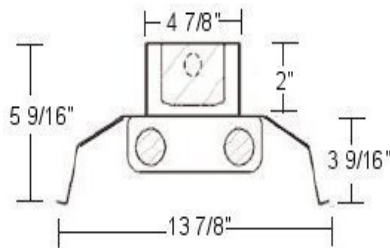

STANDARD

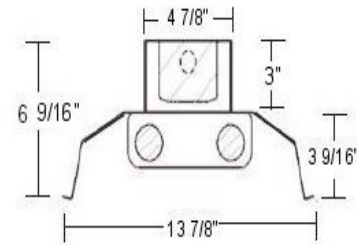

HO

Dimensions and specifications subject to change without notice.



◆ 800-444-WATT ◆ www.mobern.com ◆
8200 Stayton Dr., Ste. 500, Jessup, MD 20794

CAT#	
JOB NAME	TYPE